




VOLEX

GROUP

Standard Cord Details: 17603 10 B1




Specifications	
Certifications	  
Part Number	17603 10 B1
Connector Type	C13
Plug Type	5-15P
Category	Plastic
Application	Detachable
Plug Catalog No.	PS204
Connector Catalog No.	386A
Cable	SJT AWG 16x3 (Shielded)
Jacket Color	black
Length in Feet	9'10"
Length in Meters	3
Temperature Rating	60 C
Packaging Units Per Carton	H-50,H-25
Color Coding	International
Nominal OD in Inches	0.353
Nominal OD in Millimeters	8.97

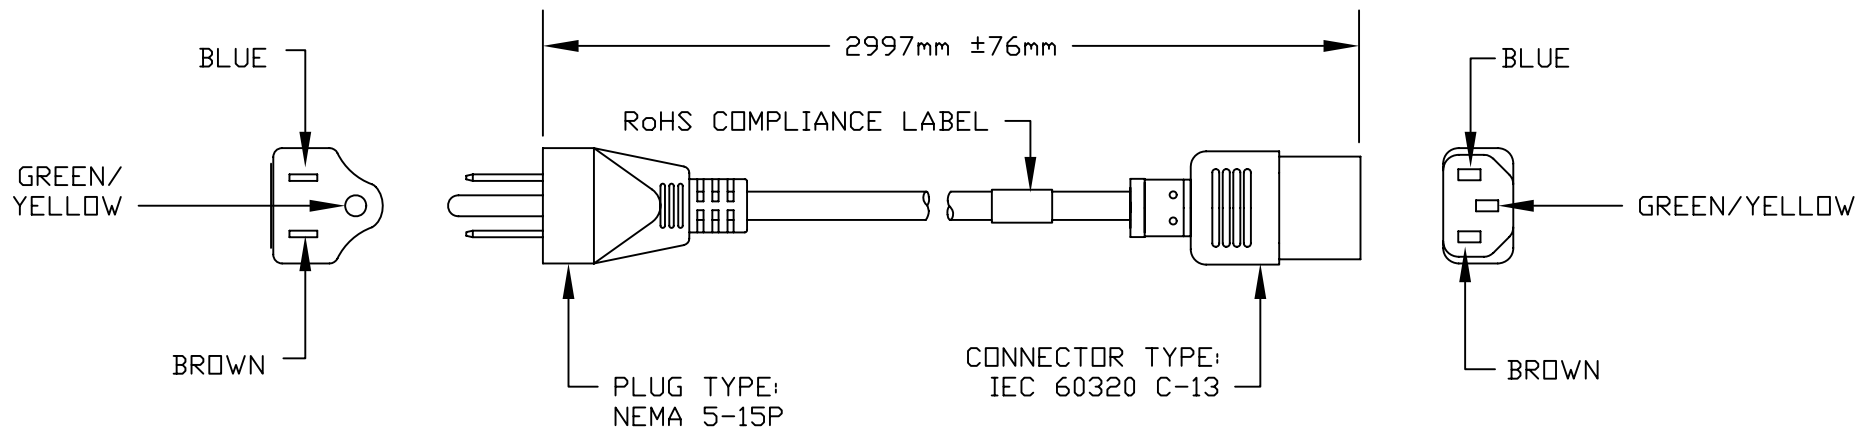

VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: FOLD & TIE

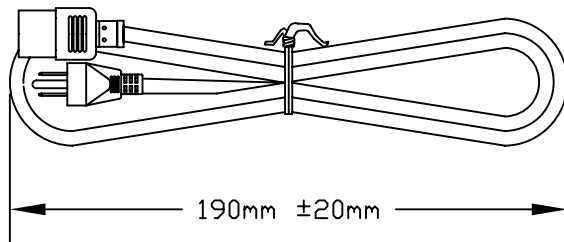

NOTES

- 1) CORDAGE: CORDAGE: 16/3 SJT, FOIL SHIELDED WITH DRAIN WIRE, 60°C, BLACK
- 2) APPROVALS:  
- 3) RATING: 13 AMP/125 VOLTS
- 4) DRAIN WIRE CONNECTED TO GROUND PIN OF PLUG MOLD ONLY. DRAIN WIRE IS CUT FLUSH WITH JACKET EDGE PRIOR TO MOLDING CONNECTOR.
- 5) ALL DIMENSIONS IN MILLIMETERS.
- 7) PACKAGING: 50 PIECES/CARTON.

1	C.U.D - NEW RELEASE	9/20/07
REV	DESCRIPTION	DATE



FORM IN71-07 REV.A

- ☒ Indianapolis, IN
- ☐ Conover, N.C.
- ☐ Freemont, CA
- ☐ Aguascalientes, MX
- ☐ Tijuana, Mexico
- ☐ Hermosillo, MX
- ☐ Clinton, AR
- ☐ Kanata, Canada

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

MATERIAL:
PLUG: PVC, BLACK
JACKET: PVC, BLACK
RoHS/Prop 65 Compliant

FINISH:
JACKET: SMOOTH

SCALE:
NOT TO SCALE

ECD:
N/A

ITEM DESCRIPTION
SHIELDED CORDSET-NORTH AMERICAN
DETACHABLE POWER SUPPLY CORD (9'10")

TOLERANCE
UNLESS OTHERWISE
SPECIFIED
.XXX ± .005
.XX ± .02
.X ± .03
FRACT. ± 1/32
ANGULAR ± 1/2°

APPROVED

STC

DRAWN BY

STC

DATE:

9/20/07

PART NO.

17603 10 B1