


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

- 1 INSULATION SLEEVE
HEAT SHRINKABLE, RADIATION CROSS-LINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- 2 SOLDER PREFORM WITH FLUX
SNG3 SRAP PER QQ-S-571.

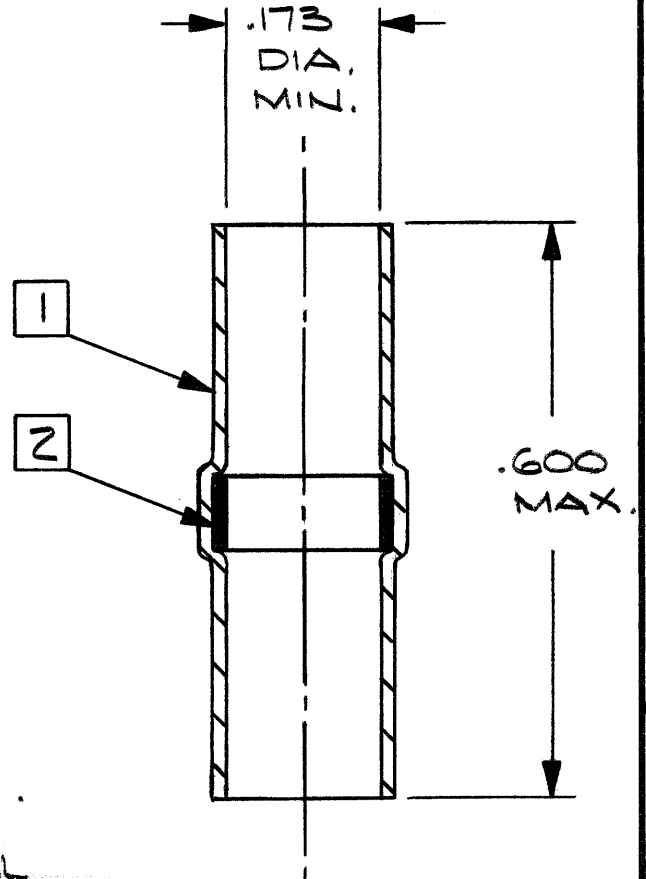

NOTES:

- a) THESE PARTS ARE DESIGNED FOR USE IN RAYCHEM SHIELD TERMINATION KIT D-659-0027.
- b) PARTS MAY BE INSTALLED WITH HOT AIR OR INFRARED HEATERS.
- c) ACCEPTANCE SAMPLING SHALL BE IN ACCORDANCE WITH INSPECTION LEVEL I OF MIL-STD-105. THE ACCEPTABLE QUALITY LEVEL (AQL) SHALL BE 4.0.

DEVICES SPECIFICATION CONTROL DRAWING

DO NOT SCALE THIS DRAWING		DRAWN CRN:62976		RAYCHEM		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: .XXX : ± — .XX : ± — — : ± —		CHECKED		TITLE		SOLDER SLEEVE SHIELD TERMINATOR	
		APPROVED <i>[Signature]</i>					
MATERIAL —		APPROVED		SIZE		DWG. NO.	
		APPROVED		A		D-659-0039	
FINISH —		PART NO.		CODE IDENT.		NO. 06090	
		PROJECT		SCALE —		WEIGHT —	
				SHEET — OF —			