



50 - 2100LN
50-2100AN
50-2100MR


CHIP-LOK™ REFLECTOR ADAPTOR
FOR USE WITH LEDiL REFLECTORS

FEATURES/BENEFITS:



- OPTICALLY EFFICIENT ADAPTOR ENABLES EASY ATTACHMENT OF LEDiL REFLECTORS WITH CHIP-LOK LED ARRAY HOLDERS.
- REFLECTOR INTERFACE SUPPORTS LEDiL LENA, LENINIA, ANGELA, ANGELINA, AND MIRELLA
- BREAK AWAY TAB DESIGN ALLOWS FOR VERSATILE ATTACHMENT TO MULTIPLE COB ARRAYS
- SUPPORTED COB MANUFACTURERS: CREE, CITIZEN, PHILIPS, LG, NICHIA, SHARP AND BRIDGELUX
- STANDARDIZED MOUNTING SCREW LOCATIONS MAKES CHANGES TO OTHER ARRAYS AND REFLECTORS SIMPLE

APPLICATION:

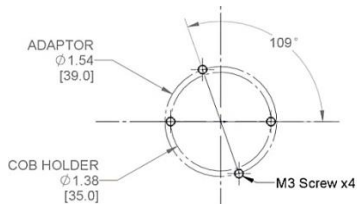

MECHANICAL:

MOUNTING HOLE SPACING: 1.54 IN (39.0 mm)
SCREW SIZE: M3
SCREW TORQUE: 1.0 IN-LB (0.1 Nm)

-POLARIZED MARKINGS PROVIDE INSTALLATION ORIENTATION

PHYSICAL:

HOUSING: POLYCARBONATE
TEMPERATURE: 90°C (194°F)
COLOR: WHITE
FLAME RATING: 94 V-2

STANDARDS & SPECIFICATIONS:

-RoHS AND REACH COMPLIANT

COMPATABILITY CHART:

COB Array	IDEAL Holder	IDEAL 50-2100M Mirella PF	IDEAL 50-2100LN Lena/Lenina	IDEAL 50-2100AN Angela/Angelina
Citizen CLL030/CLL032	50-2103CT		•	•
Citizen CLL040/CLL042	50-2204CT		•	•
Cree CXA18	50-2101CR	•	•	•
Cree CXA25	50-2102CR		•	•
Cree CXA30	50-2234C		•	•
Edison P13*	50-2103CT		•	•
Edison P16*	50-2204CT		•	•
Lextar Nimbus 2000/3000/5000*	50-2204CT		•	•
LG InnLtek LEMWM18*	50-2100LG		•	•
LG InnLtek LEMWM24*	50-2204CT		•	•
Nichia 110/121/204	50-2100NC	•	•	•
Nichia 216/360	50-2103NC		•	•
Philips 1203	50-2100NC		•	•
Philips 1204/1205/1208	50-2100SH	•	•	•
Seoul SDWx2/SDWx3	50-2103CT		•	•
Seoul SDWx4/SDWx5	50-2204CT		•	•
Sharp MegaZenigala	50-2100SH		•	•




ORDERING INFO:

CATALOG #
50-2100AN
50-2100LN
50-2100 MR

REFLECTOR DESCRIPTION
ANGELA / ANGELINA
LENA / LENINIA
MIRELLA PF

PACKAGE TYPE:
500 PIECE
500 PIECE
500 PIECE

WEIGHT LBS (KG)
2.0 (0,9)
3.5 (1,6)
1.3 (0,6)

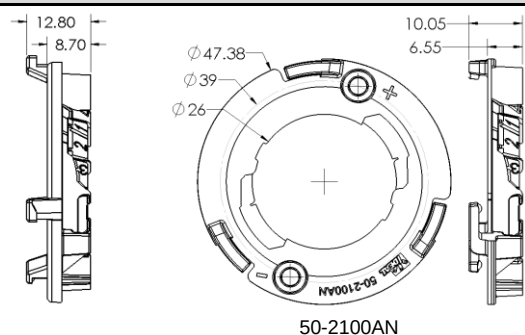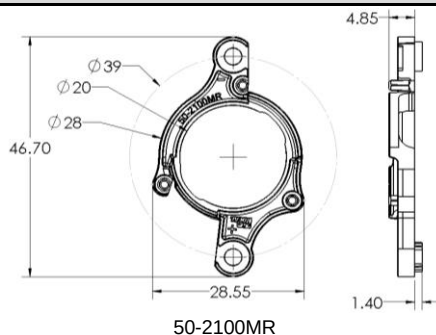



50-2300AN

CHIP-LOK™ REFLECTOR ADAPTOR
FOR USE WITH **LEDiL** REFLECTORS


FEATURES/BENEFITS:



- OPTICALLY EFFICIENT ADAPTOR ENABLES EASY ATTACHMENT OF LEDiL REFLECTORS WITH CHIP-LOK LED ARRAY HOLDERS.
- REFLECTOR INTERFACE SUPPORTS LEDiL , ANGELA, AND ANGELINA
- SUPPORTED COB MANUFACTURERS: CREE
- STANDARDIZED MOUNTING SCREW LOCATIONS MAKES CHANGES TO OTHER ARRAYS AND REFLECTORS SIMPLE

APPLICATION:

MECHANICAL:

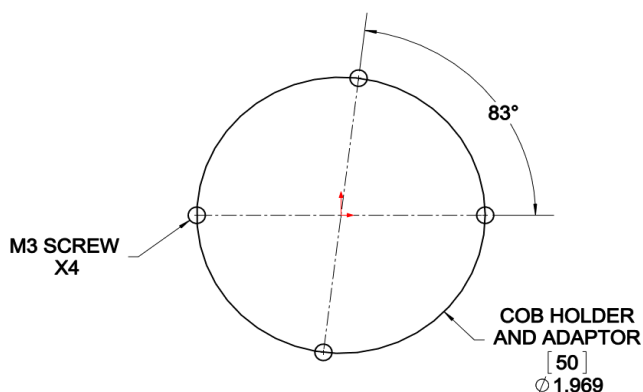

MOUNTING HOLE SPACING: 1.97 IN (50.0 mm)
SCREW SIZE: M3
SCREW TORQUE: 1.0 IN-LB (0.1 Nm)

PHYSICAL:

STANDARDS & SPECIFICATIONS:

HOUSING: POLYCARBONATE
TEMPERATURE: 90°C (194°F)
COLOR: WHITE
FLAME RATING: 94 V-2

-RoHS AND REACH COMPLIANT

COMPATABILITY CHART:

COB Array	IDEAL Holder	IDEAL 50-2300AN Angela/Angelina
Cree CXA35	50-2303CR	•



ORDERING INFO:

CATALOG #
50-2300AN

REFLECTOR DESCRIPTION
ANGELA / ANGELINA

PACKAGE TYPE:
500 PIECE

WEIGHT LBS (KG)
2.8 (1,3)

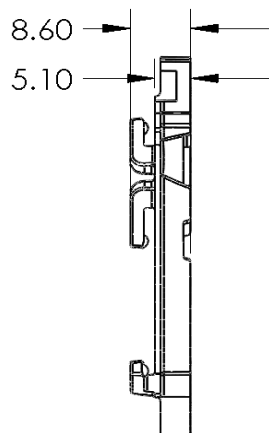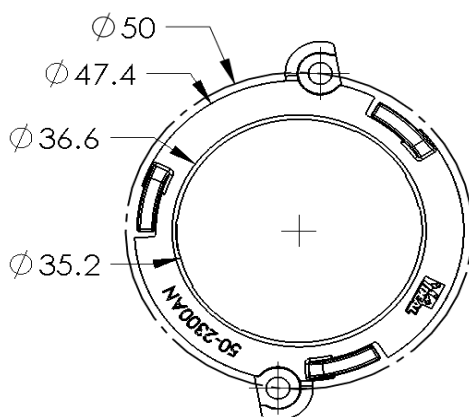

50-2300AN