
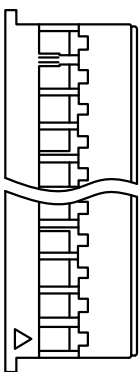

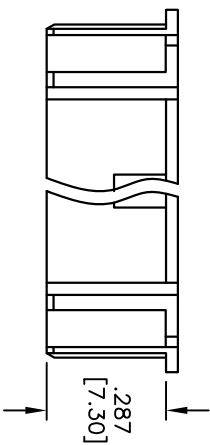


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description  | Date     | Appr  |
|-----|-------|--------------|----------|-------|
| -   |       | RELEASED     | 11/23/10 |       |
| A   |       | UPDATE SPEC. | 6/27/16  | AV/SC |

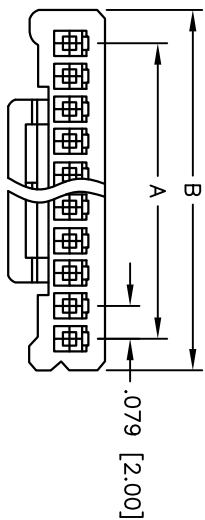

**SPECIFICATIONS:**

Material:  
 Insulator: NY66, rated UL 94V-0  
 Insulator color: Natural  
 Electrical:  
 Voltage rating: 250 VAC/DC  
 Current rating: 3A AC/DC max, 22AWG  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 800 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

Positions: 2 thru 15  
 A = .079 [2.00] x No. of Spaces  
 B = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

| INCHES      | HOLES       |
|-------------|-------------|
| .X ± .10    | ØX ± .10    |
| .XX ± .020  | ØXX ± .015  |
| .XXX ± .015 | ØXXX ± .010 |

| APPROVALS  | DATE     |
|------------|----------|
| DRAWN AY   | 11/23/10 |
| CHECKED AH | 11/23/10 |
| APPROVED   |          |

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .079 [2.00] CRIMP HOUSING

| SIZE | PART NO. | REV. |
|------|----------|------|
| X    | 2CHH-XX  | A    |

REF: S00015T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1