









RoHS
Compliant

ZONE	E C N . N O .	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2024.06.19







NOTES

1. CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.
9. WATERPROOF LEVEL: IP68

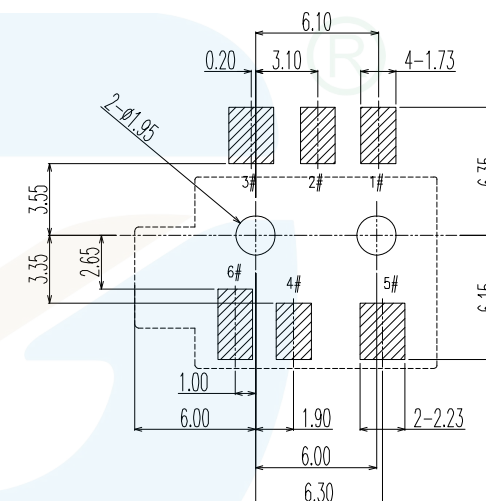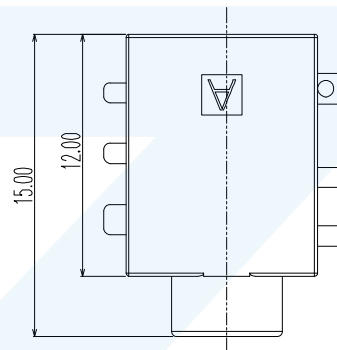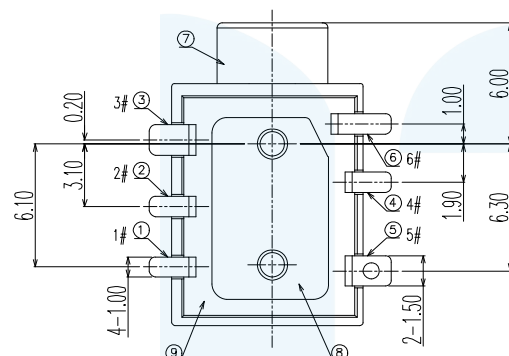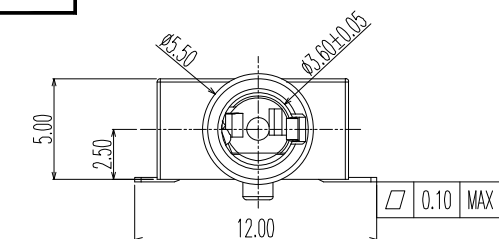

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05



⑨	GLUE		EPOXY RESIN ADHESIVE	BLACK
⑧	COVER	1	LCP	BLACK
⑦	HOUSING	1	LCP	BLACK
⑥	TERMINAL 6#(MIC)	1	C5210, 0.2T	NICKEL UNDERPLATING OVERALL Au30u" PLATING ON CONTACT AREA Au3u" PLATING ON SOLDER AREA
⑤	TERMINAL 5#(L)	1	Ti Cu, 0.2T	
④	TERMINAL 4#(L-DET)	1	C5191, 0.2T	
③	TERMINAL 3#(GND)	1	C5210, 0.2T	
②	TERMINAL 2#(R-DET)	1	C5191, 0.2T	
○	TERMINAL 1#(R)	1	Ti Cu, 0.2T	
ITEM		Q'TY	MATERIAL	FINISH & COLOR

NICKEL UNDERPLATING OVERALL
Au30u" PLATING ON CONTACT AREA
Au3u" PLATING ON SOLDER AREA



LZG INDUSTRIAL CO., LTD

DRAWING:	林生刚	DATE:	2024.06.19	SCALE	1:1
CHECK:	李宏鑫	DATE:	2024.06.19	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2024.06.19	DWG. NO.	
DRAWING NO.	ZB23033-06SBAP-A			SHEET	1/1

PART NAME	WATERPROOF Ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.25	0.0±2°	UNIT: mm
PART NO.	ZB23033-06SBAP-A	OTHERWISE SPECIFIED:	0.00±0.15 0.000±0.05	0.0°±1° 0.0°±0.5°	