

AS-Interface 4-fold M12 feeder U_ASI and Uaux, 4 x M12 socket
IP67 Delivery incl. mounting plate



General technical data		
Type of device		AS-Interface accessories
design of the product		AS-i M12 4-fold feeder, AS-i with Uaux, 4x M12 socket
Function		AS-i flat cable transition to M12
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Number sockets		4
Scope of supply		Delivery including mounting plate
Connections/ Terminals		
type of electrical connection		insulation piercing method for AS-Interface flat cable
AS interface		
• Connection		4 × M12 socket
Inputs		
Inputs socket assignment		1 = AS-i "+" 2 = Uaux "-" 3=AS-i "-" 4 = Uaux "+"
Mechanical data		
Type of mounting		for wall and standard rail mounting
Contacts Load rating max	A	4
Ambient conditions		
ambient temperature	°C	-25 ... +85
ambient temperature during storage	°C	-25 ... +85
degree of protection		IP67
Certificates/ approvals		
General Product Approval	EMV	Marine / Shipping



[Confirmation](#)



other	Environment
-------	-------------

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-1NR04>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NR04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NR04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-1NR04&lang=en

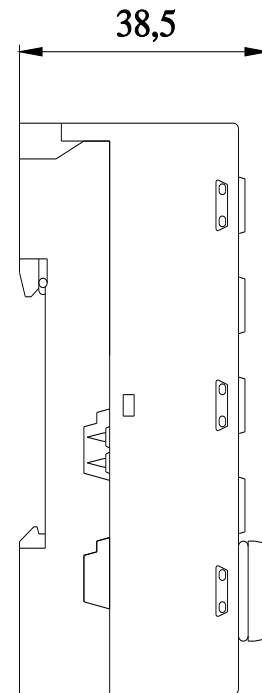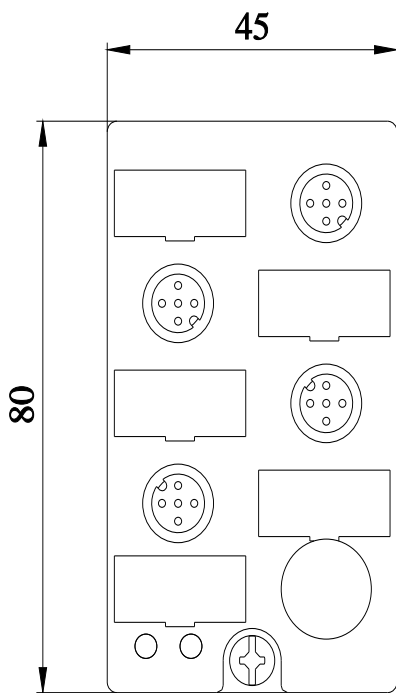

last modified:

3/11/2024 