

1

2

3

4

A

A

B

B



C

C

D

D

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

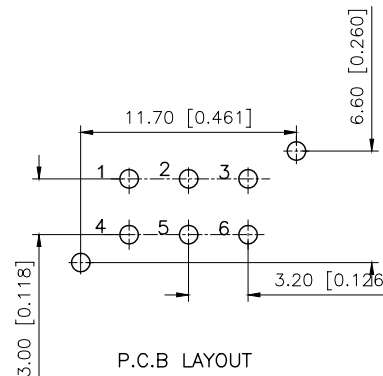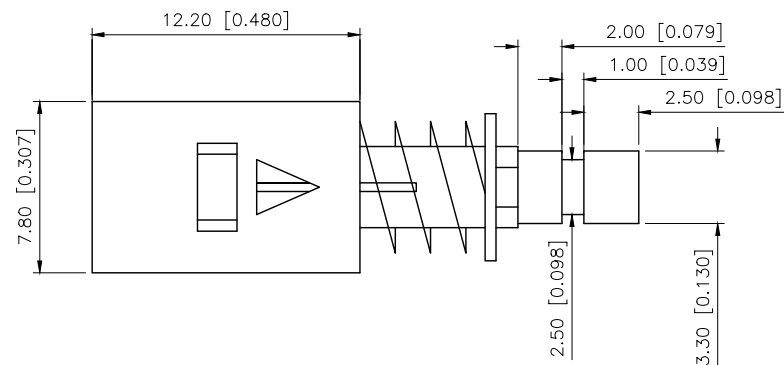

P.C.B LAYOUT

FEATURES

Light operating force
Long term low contact resistance
Momentary or latching operation
Short stroke 3.0mm to latch

SPECIFICATIONS




1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

●Temperature rating	Operating -15℃ to +55℃ storage,-25℃to +65℃
● Operation	160±80gf
● Stroke	Lock Stroke 2.0±0.2mm Full stroke,2.5±0.2mm
● Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
● Con tact form	DPDT

PAPT NO	XKBS22E05-Z
OPERATION	W:NO LOCK Z:LOCK

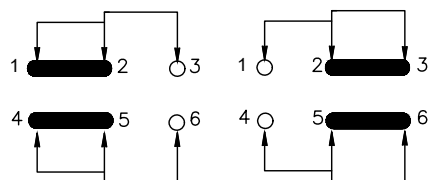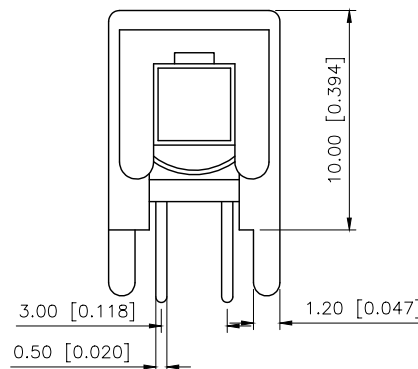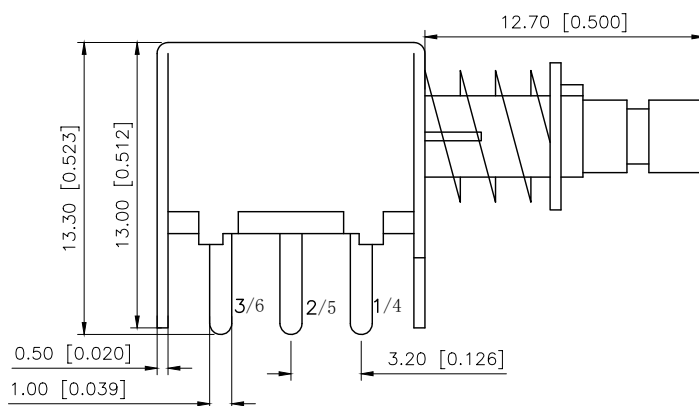

常态: 1-2导通 4-5导通

按下: 2-3导通 5-6导通

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	XKBS22E05-Z
APPROVED		SIZE:	A4	DWG NO.:	X-XKBS22E05-Z

SCALE	PAGE	REVISION
N/A	1/1	A1

1

2

3

4