

Pitch:5.08mm(0.20 ")
Power Socket Single Row Dip Type

ELETE
—Professional Connecting Solution—
HFRSS89 Series


Specifications

Current Rating:7.9 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:1500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

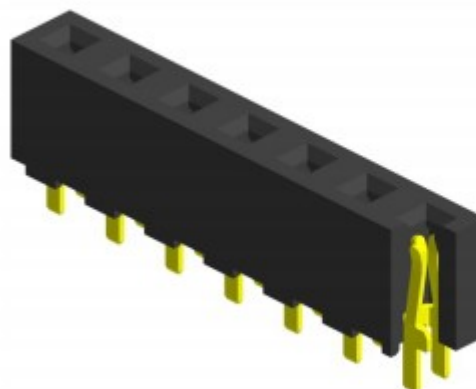

Mating with






HMRSS25




HMRSR25



HMRSV25/
HMRSN25

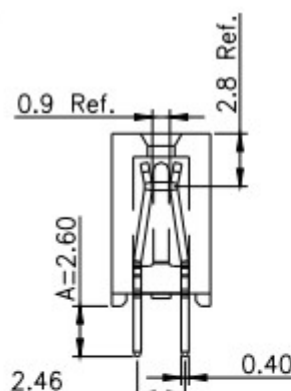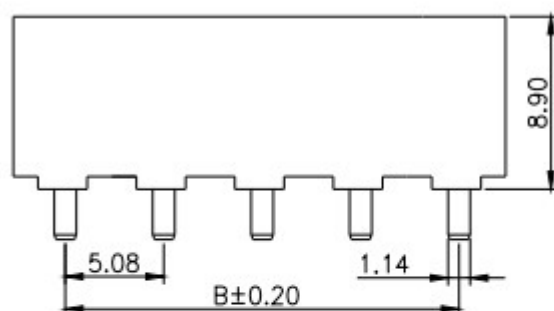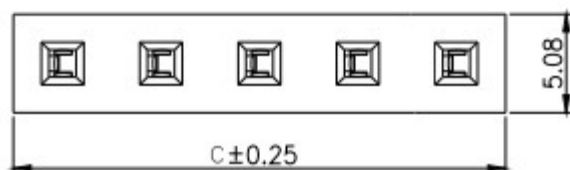

Recommended P.C.Board
Hole Layout



PS:Suggested Mating Pin Length:3.8~8.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	B		C	B		C	B		C	B
02	10.16	5.08	08	40.64	35.56	14	71.12	66.04	20	101.60	96.52
03	15.24	10.16	09	45.72	40.64	15	76.20	71.12			
04	20.32	15.24	10	50.80	45.72	16	81.28	76.20			
05	25.40	20.32	11	55.88	50.80	17	86.36	81.28			
06	30.48	25.40	12	60.96	55.88	18	91.44	86.36			
07	35.56	30.48	13	66.04	60.96	19	96.52	91.44			