

- ▶ Heatsinks f.cool
- ▶ Cases f.case
- ▼ **Connectors f.con**
- ▶ Sockets
- ▼ PCB connectors
  - Male headers
  - Female headers
  - Direct female connectors
  - Jumpers
- ▶ IDC-connectors
- ▶ D-Sub connectors
- Brackets for PC
- ▶ Optoelectronics

## Jumpers


### CAB 6 ...

#### CAB 6 05 G R

grid 2.54 mm; for 0.6...0.64 mm wire wrap pins and Ø 0.6...0.7 mm The flexible contacts are shorting two pins. The jumpers can be mounted behind and next to each other.

[Data sheet](#)

[add to request](#)

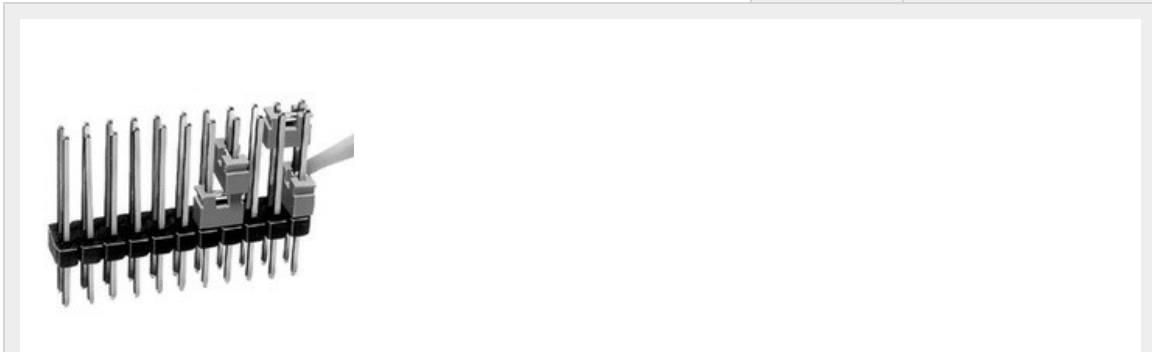

Features   **Technical Drawing**   Variants   Service

<b>grid</b>	2.54 mm
<b>surface of contact</b>	0.5 µm gold
<b>surface contact / contact sleeve</b>	0.5 µm Au
	1 µm Au
	5 µm Sn
<b>no. of contacts</b>	2
<b>version</b>	open, for miniature alligator clip
<b>insert depth</b>	5mm...plug through
<b>nominal current</b>	1.5 A
<b>nominal voltage</b>	250 V AC
<b>insulating body material</b>	PA 66
<b>temperature range</b>	-40°C... +105°C
<b>colour</b>	red