


## Reed Sensors for PCB Mounting



## APPLICATIONS

- **Telecommunications**  
Telephone hook switch, keyboard applications
- **Domestic appliances**  
Door switch for washing machines, dishwashers, microwave ovens, baking ovens, refrigerators
- **Limit switch for low-power signals**  
Garage door controls, lever hoists, conveyors
- **Lifts / elevators**  
Position indicators

## ORDER INFORMATION

| Series           | Packaging Size | Magnetic Sensitivity |
|------------------|----------------|----------------------|
| <b>MK06 - 10</b> | <b>X -</b>     | <b>X</b>             |
| <b>Options</b>   | 4              | B, C, D, E           |
|                  | 5              | B, C                 |
|                  | 6              | B, C, D, E           |
|                  | 7              | B, C, D, E           |
|                  | 8 (Form A)     | B, C, D, E           |
|                  | 8 (Form B)     | H, I, K              |

| Series                            | Contact Form |
|-----------------------------------|--------------|
| <b>MK06 - 10</b>                  | <b>X *</b>   |
| <b>Options</b>                    | B            |
|                                   | E            |
| * See footnote on following page. |              |

## DESCRIPTION

MK06 sensors are magnetically operated Reed proximity switches for direct PCB mounting. The sensor should be mounted on a fixed surface with the actuating magnet on the moving surface. Introduction or removal of the magnetic field determines the closing and opening of the Reed Switch. (2.54 mm PCB pin spacing, available with different distances)

## FEATURES

- Form A, B, C and E (Latching) available
- High power switches available
- Various case sizes available
- Five operate sensitivities available

## MAGNETIC SENSITIVITY

| Sensitivity Class | Pull In AT Range |
|-------------------|------------------|
| B                 | 10 - 15          |
| C, H              | 15 - 20          |
| D, I              | 20 - 25          |
| E, K              | 25 - 30          |

### Part Number Example

MK06 - 4 - C

4 is the packaging size  
C is the magnetic sensitivity


### Part Number Example

MK06 - 10 - E


E selects the latching option

### DIMENSIONS


All dimensions in mm [inch]




Angle of pins may deviate  $\pm 7.5^\circ$




Angle of pins may deviate  $\pm 7.5^\circ$




Angle of pins may deviate  $\pm 7.5^\circ$




Angle of pins may deviate  $\pm 7.5^\circ$



Angle of pins may deviate  $\pm 7.5^\circ$

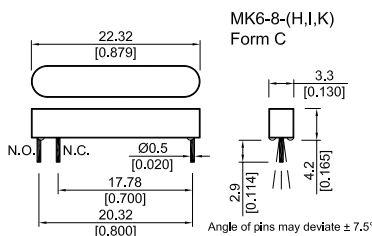

Angle of pins may deviate  $\pm 7.5^\circ$

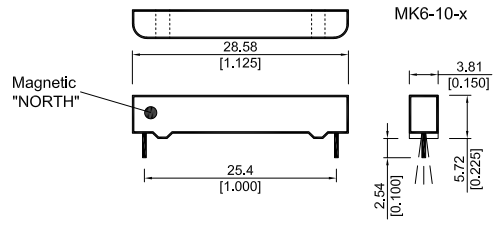

Angle of pins may deviate  $\pm 7.5^\circ$

\* **MK6-10-E** is a magnetic latching sensor which is opened or closed by a passing magnet and remains in that state until a magnet of opposite polarity or direction passes by again. The E refers to a latching sensor and does not represent the magnetic sensitivity.

**MK6-10-B** is a normally closed sensor. The B refers to a latching sensor and does not represent the magnetic sensitivity.

**Reed Sensors for  
PCB Mounting**
**CONTACT DATA**

| All Data at 20° C                                                                                                                                                                                                                                                                                                                                                         | Switch Model →<br>Contact Form →<br>Packing Style →               | Switch 66<br>Form A, B, C<br>6, 7, 8, 10 |      |      | Switch 80<br>Form A<br>4 |      |      |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|------------------------------------------|------|------|--------------------------|------|------|-------|
| Contact Ratings                                                                                                                                                                                                                                                                                                                                                           | Conditions                                                        | Min.                                     | Typ. | Max. | Min.                     | Typ. | Max. | Units |
| Switching Power                                                                                                                                                                                                                                                                                                                                                           | Any DC combination of V & A not to exceed their individual max.'s |                                          |      | 10   |                          |      | 10   | W     |
| Switching Voltage                                                                                                                                                                                                                                                                                                                                                         | DC or peak AC                                                     |                                          |      | 200  |                          |      | 170  | V     |
| Switching Current                                                                                                                                                                                                                                                                                                                                                         | DC or peak AC                                                     |                                          |      | 0.5  |                          |      | 0.5  | A     |
| Carry Current                                                                                                                                                                                                                                                                                                                                                             | DC or peak AC                                                     |                                          |      | 1.25 |                          |      | 0.5  | A     |
| Static Contact Resistance                                                                                                                                                                                                                                                                                                                                                 | w/ 0.5 V & 10mA                                                   |                                          |      | 150  |                          |      | 200  | mΩ    |
| Dynamic Contact Resistance                                                                                                                                                                                                                                                                                                                                                | Measured w/ 0.5 V & 50mA ,<br>1.5 ms after closure                |                                          |      | 200  |                          |      | 250  | mΩ    |
| Insulation Resistance across Contacts                                                                                                                                                                                                                                                                                                                                     | 100 volts applied                                                 | 10 <sup>10</sup> *                       |      |      | 10 <sup>9</sup>          |      |      | Ω     |
| Breakdown Voltage across Contact                                                                                                                                                                                                                                                                                                                                          | Voltage applied for 60 sec. min.                                  | 225 *                                    |      |      | 210                      |      |      | VDC   |
| Operate Time incl. Bounce                                                                                                                                                                                                                                                                                                                                                 | Measured w/ 100 % overdrive                                       |                                          |      | 0.5  |                          |      | 0.6  | ms    |
| Release Time                                                                                                                                                                                                                                                                                                                                                              | Measured w/ no coil suppression                                   |                                          |      | 0.1  |                          |      | 0.1  | ms    |
| Capacitance                                                                                                                                                                                                                                                                                                                                                               | at 10 kHz cross contact                                           |                                          | 0.2  |      |                          | 0.2  |      | pF    |
| <b>Contact Operation **</b>                                                                                                                                                                                                                                                                                                                                               |                                                                   |                                          |      |      |                          |      |      |       |
| Must Operate Condition                                                                                                                                                                                                                                                                                                                                                    | Steady state field                                                | 10                                       |      | 30   | 10                       |      | 30   | AT    |
| Must Release Condition                                                                                                                                                                                                                                                                                                                                                    | Steady state field                                                | 4                                        |      | 27   | 4                        |      | 27   | AT    |
| <b>Environmental Data</b>                                                                                                                                                                                                                                                                                                                                                 |                                                                   |                                          |      |      |                          |      |      |       |
| Shock Resistance                                                                                                                                                                                                                                                                                                                                                          | 1/2 sinus wave duration 11 ms                                     |                                          |      | 50   |                          |      | 50   | g     |
| Vibration Resistance                                                                                                                                                                                                                                                                                                                                                      | From 10 - 2000 Hz                                                 |                                          |      | 20   |                          |      | 20   | g     |
| Ambient Temperature                                                                                                                                                                                                                                                                                                                                                       | 10°C/ minute max. allowable                                       | -20                                      |      | 85   | -20                      |      | 85   | °C    |
| Stock Temperature                                                                                                                                                                                                                                                                                                                                                         | 10°C/ minute max. allowable                                       | -35                                      |      | 85   | -35                      |      | 85   | °C    |
| Soldering Temperature                                                                                                                                                                                                                                                                                                                                                     | 5 sec.                                                            |                                          |      | 260  |                          |      | 260  | °C    |
| Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch.<br>* Insulation resistance of 10 <sup>12</sup> and breakdown voltage of 480 VDC is available.<br>** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required. |                                                                   |                                          |      |      |                          |      |      |       |

## CONTACT DATA

| All Data at 20° C                                                                                                                               | Switch Model →<br>Contact Form →<br>Packing Style →               | Switch 87<br>Form A<br>5 |      |      | Switch 90<br>Form C<br>8 |      |      |       |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------|------|------|--------------------------|------|------|-------|
| Contact Ratings                                                                                                                                 | Conditions                                                        | Min.                     | Typ. | Max. | Min.                     | Typ. | Max. | Units |
| Switching Power                                                                                                                                 | Any DC combination of V & A not to exceed their individual max.'s |                          |      | 10   |                          |      | 20   | W     |
| Switching Voltage                                                                                                                               | DC or peak AC                                                     |                          |      | 200  |                          |      | 175  | V     |
| Switching Current                                                                                                                               | DC or peak AC                                                     |                          |      | 0.5  |                          |      | 0.5  | A     |
| Carry Current                                                                                                                                   | DC or peak AC                                                     |                          |      | 0.5  |                          |      | 1.0  | A     |
| Static Contact Resistance                                                                                                                       | w/ 0.5 V & 10mA                                                   |                          |      | 200  |                          |      | 150  | mΩ    |
| Dynamic Contact Resistance                                                                                                                      | Measured w/ 0.5 V & 50mA , 1.5 ms after closure                   |                          |      | 200  |                          |      | 250  | mΩ    |
| Insulation Resistance across Contacts                                                                                                           | 100 volts applied                                                 | 10 <sup>9</sup>          |      |      | 10 <sup>9</sup>          |      |      | Ω     |
| Breakdown Voltage across Contact                                                                                                                | Voltage applied for 60 sec. min.                                  | 100                      |      |      | 200                      |      |      | VDC   |
| Operate Time incl. Bounce                                                                                                                       | Measured w/ 100 % overdrive                                       |                          |      | 0.6  |                          |      | 0.7  | ms    |
| Release Time                                                                                                                                    | Measured w/ no coil suppression                                   |                          |      | 0.1  |                          |      | 1.5  | ms    |
| Capacitance                                                                                                                                     | at 10 kHz cross contact                                           |                          | 0.2  |      |                          | 1.0  |      | pF    |
| <b>Contact Operation **</b>                                                                                                                     |                                                                   |                          |      |      |                          |      |      |       |
| Must Operate Condition                                                                                                                          | Steady state field                                                | 10                       |      | 30   | 15                       |      | 40   | AT    |
| Must Release Condition                                                                                                                          | Steady state field                                                | 4                        |      | 27   |                          |      |      | AT    |
| <b>Environmental Data</b>                                                                                                                       |                                                                   |                          |      |      |                          |      |      |       |
| Shock Resistance                                                                                                                                | 1/2 sinus wave duration 11 ms                                     |                          |      | 50   |                          |      | 50   | g     |
| Vibration Resistance                                                                                                                            | From 10 - 2000 Hz                                                 |                          |      | 20   |                          |      | 20   | g     |
| Ambient Temperature                                                                                                                             | 10°C/ minute max. allowable                                       | -20                      |      | 85   | -20                      |      | 85   | °C    |
| Stock Temperature                                                                                                                               | 10°C/ minute max. allowable                                       | -35                      |      | 85   | -35                      |      | 85   | °C    |
| Soldering Temperature                                                                                                                           | 5 sec.                                                            |                          |      | 260  |                          |      | 260  | °C    |
| Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch.                        |                                                                   |                          |      |      |                          |      |      |       |
| * Insulation resistance of 10 <sup>12</sup> and breakdown voltage of 480 VDC is available.                                                      |                                                                   |                          |      |      |                          |      |      |       |
| ** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required. |                                                                   |                          |      |      |                          |      |      |       |