

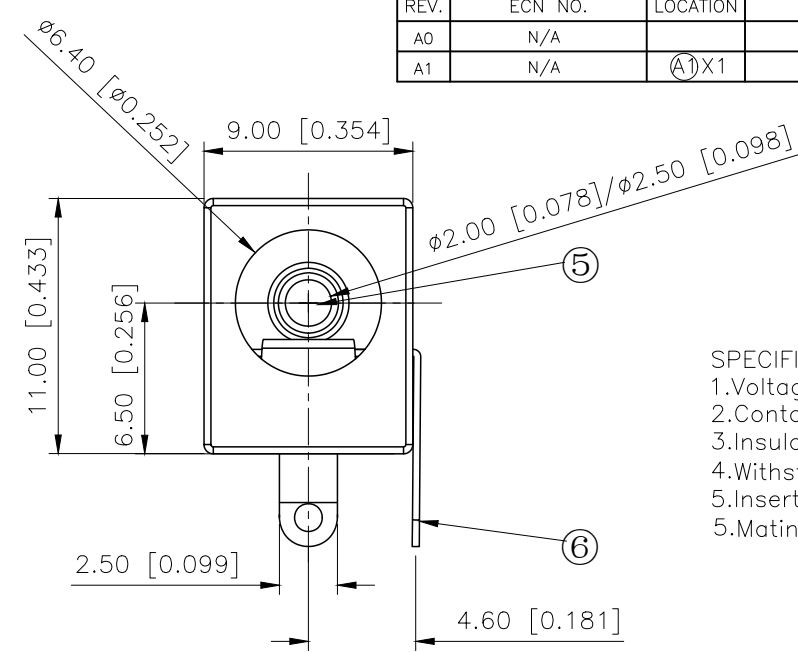


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X1	产品尺寸变更，图面升级整理图面	2025.08.16	阿树

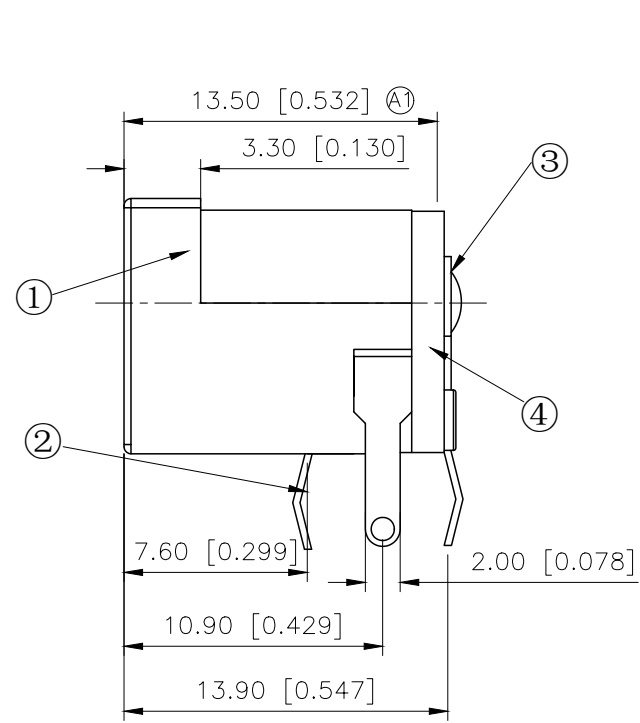

- SPECIFICATIONS:
- 1.Voltage rating: 30V 2.5A
 - 2.Contact resistance: $\leq 0.03\Omega$
 - 3.Insulation resistance: $\geq 100M\Omega$
 - 4.Withstanding voltage: AC500V(50HZ)/min
 - 5.Insertion and extraction force: 3~20N
 - 5.Mating cycles: 5.000次

SCHEMATIC	
Model	DC-005A-2.5A
Center Pin	$\varnothing 2.0$ mm
	$\varnothing 2.5$ mm

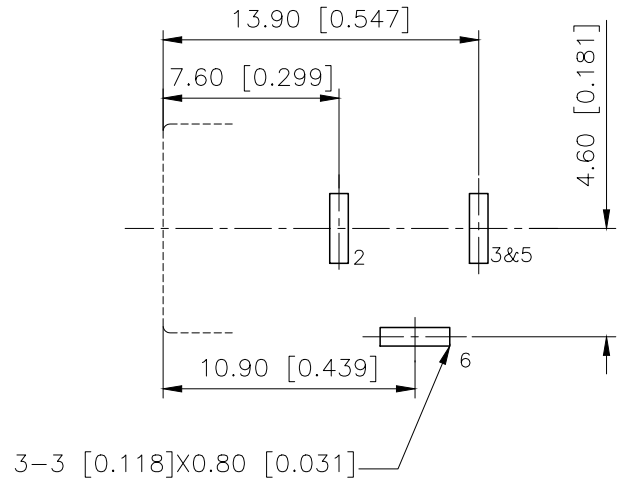

PCB LAYOUT

6	Bends	1	H62 Brass band (Y) =0.30mm	Copper-plated bottom And Tin Plated
5	Pin	1	H62 Brass rods	Copper-plated bottom And Tin Plated
4	Back cover	1	PBT	Black
3	Plain	1	H62 Brass band (Y) =0.30mm	Copper-plated bottom And Tin Plated
2	Reeds	1	65Mn Anganese copper strip T=0.20mm	Copper-plated bottom And Tin Plated
1	Pedestal	1	PBT	Black
NO	NAME	QTY	MATERIAL	Remark

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DC POWER HACK
CHECKED		UNIT:	mm/in	PART NO.:	DC-005A-2.5A-2.5
APPROVED		SIZE:	A4	DWG NO.:	