
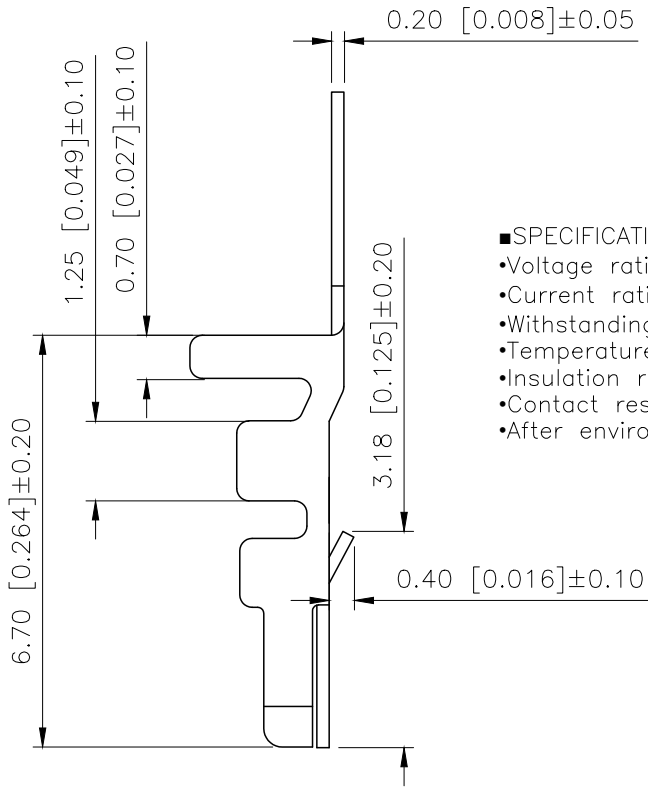


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.27	阿树

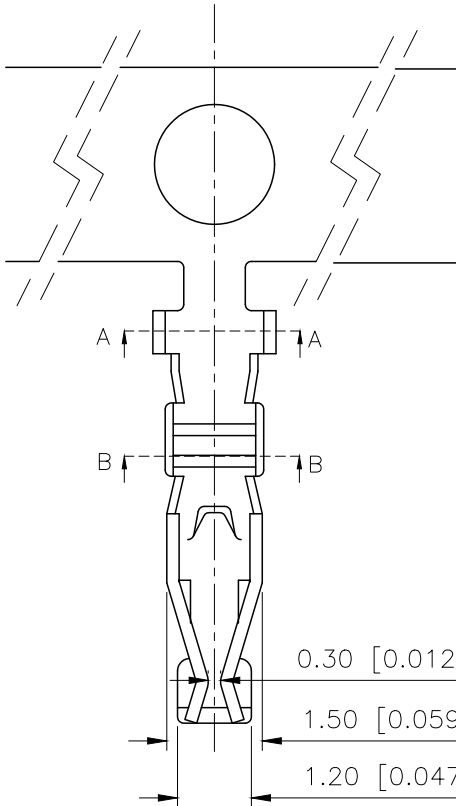



■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ


PART NO.:

X2026 I-P SN-A
① ② ③ ④ ⑤

- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor bronze
④Plating Category:SN-Bright Tin Plating
⑤TYPE:A Type

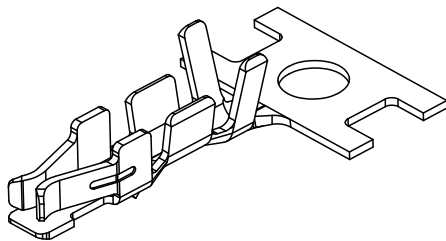

Section:A-A



Section:B-B

X2026T-PSN-A	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Plating:30u"MIN.Ni; 70u"MIN.SN	X2026H
PART NO	Material	Wire Range	Insulation OD	Finish	Used In Cjst Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
2.00mm Crimp Style Connector
PART NO.:
X2026T-PSN-A
DWG NO.: