

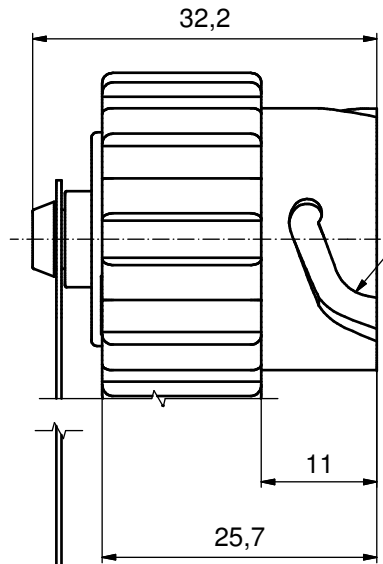


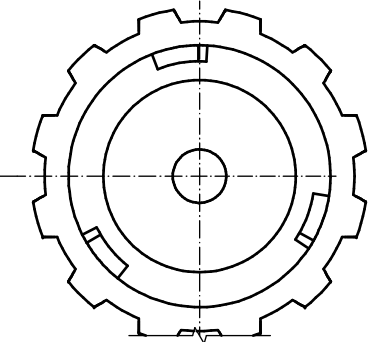

Bayonet Channel x 3

Protective Cap
(Bayonet Locking Type)

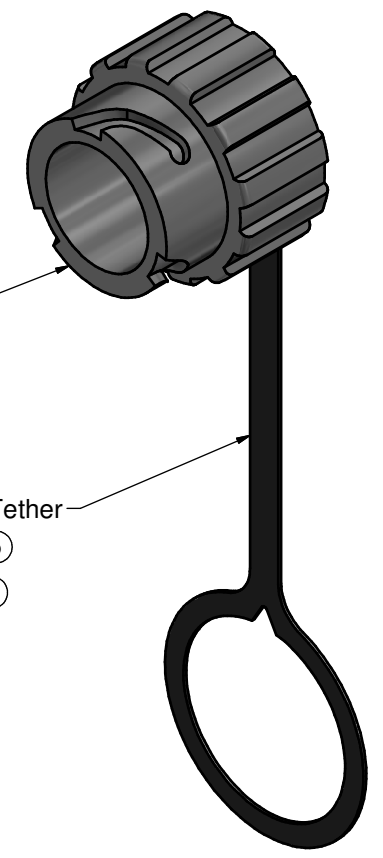

Tether

(b)

(c)

Notes:

1. Material:

- Protective Cap: PBT(Black); UL94 V-0
- Tether: PE (Black)

- Operating Temperature: -40°C to +85°C

93

Ø35

Ø28,5

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				Tolerance Unless otherwise specified 0. ± 0.50 0.0 ± 0.38 0.00 ± 0.25 Angles ± 3°		 dim. in mm	scale: 2:1 (1,5:1)				
							material: see notes				
						date		name		title: Protective Cover for IP67 Duplex Power 2+3pos Male Receptacle Assembly Ⓟ	
						drawn 05.11.13		Strakerjahn			
		appd. 05.11.13		Koch							
1 x d		Ä6182	06.06.2016	K.H.	norm			dwg no:	DIN- A3		
3 x c		Ä5616	21.04.15	K.H.	d-old						
1 x b		Ä5593	30.03.2015	K.H.				17K1A430	sh: 1		
a		Original									
rev.		description	date	name					part no:	17-400260	

DIN-A3
sh: 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[17-400260](#) [17-400323](#)