

REVISONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.12	阿树

Specifications:


规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250VAC/DC
 - 2.Current rating:3A AC/DC
额定电流: 3AAC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500VAC/分钟
 - 4.Temperature range: -55°C~+105°C
温度范围: -55°C~+105°C
 - 5.Insulation resistance:1000MQMIN
绝缘电阻: ≥1000MQ
 - 6.Contact resistance:30mQMax
接触电阻: ≥30mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBTUL94V-0
 - 8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC,镀镍/镀锡/镀金
- B、成品不能有弯针, R角不一致等不良。

PART NO.:

X05 44 W I 18 B Z A
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series NO.
- ②Row No.Pin No:15PIN
- ③Welding Board Angle :W-Male
- ④T:Tradutional
- ⑤Planting Catogotry:
18:Terminal half-Gold 30u Matte Tin
- ⑥B:Black
- ⑦7:TYPE-7
- ⑧Specific symbol

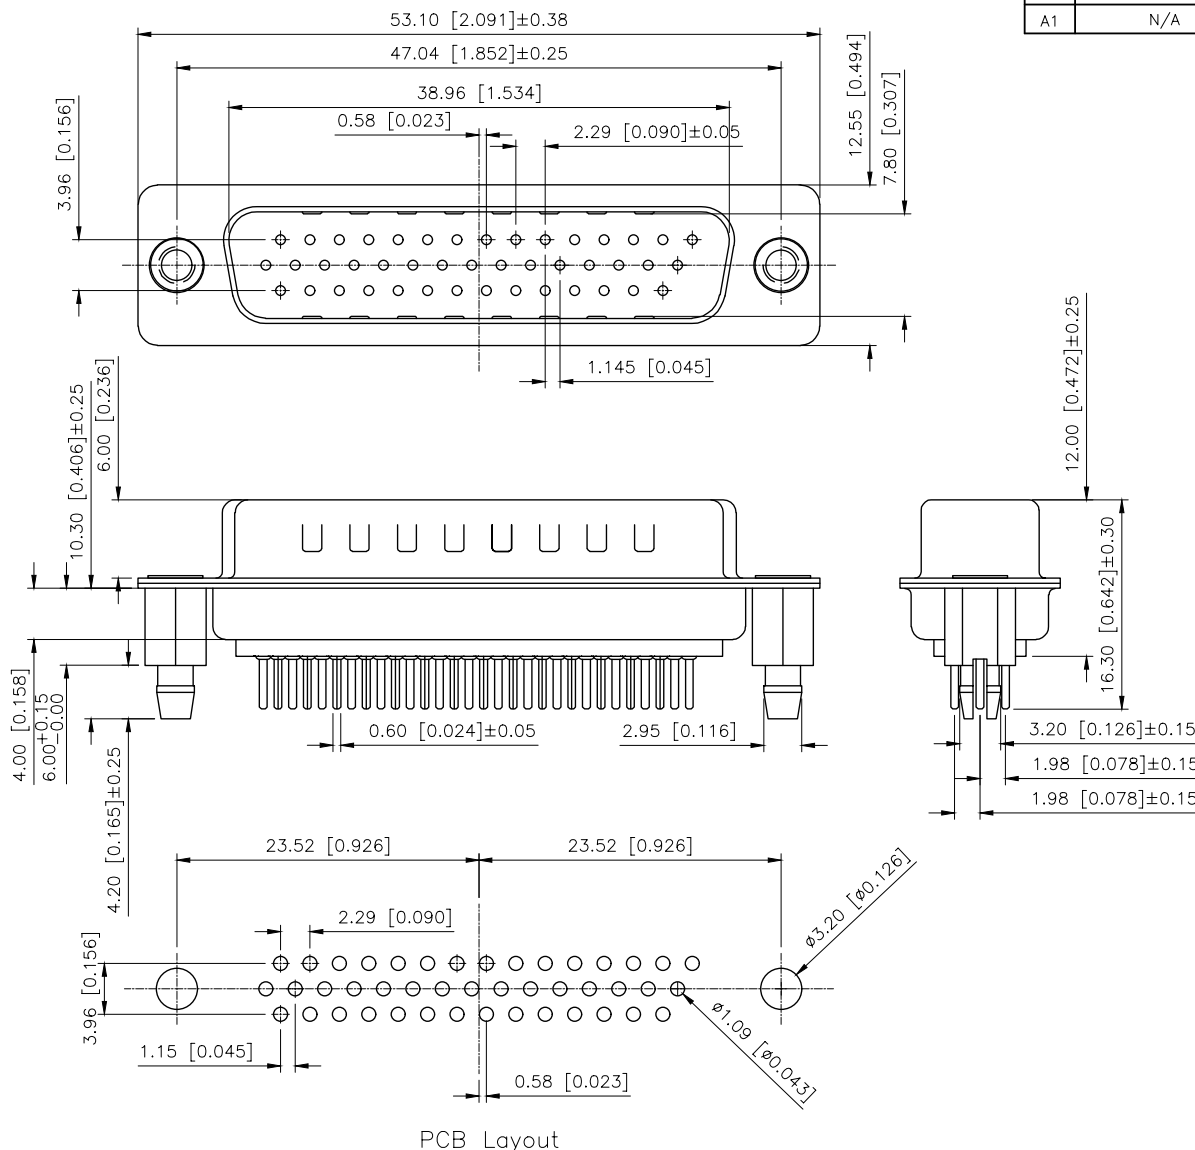

PCB Layout

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0544WT18B7A
APPROVED		SIZE: A4	DWG NO.: X-X0544WT18B7A
SCALE			PAGE
N/A			1/1
REVISION			A1