

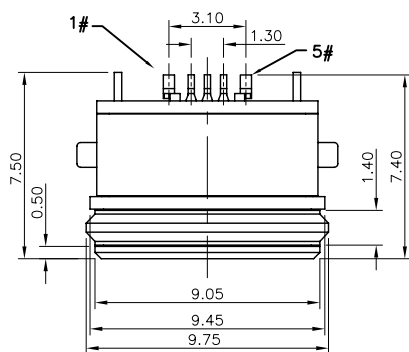
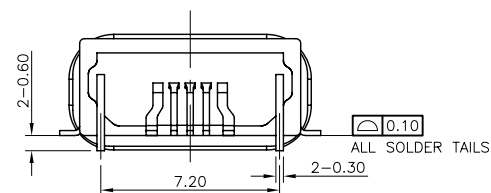




3D VIEW




Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Ground
5#	GND	Ground

⑦ Oval ring	1	Rubber	Black
⑥ Glue	1	-----	Black
⑤ U-shaped frame	1	Copper alloy or stainless	Nickel plated
④ Inner shell	1	Copper alloy or stainless	Nickel plated
③ Terminal	5	Copper alloy, 0.15t	Gold Plated On Contact Area
② Outer shell	1	High temperature thermoplastic	Black
① Body	1	High temperature thermoplastic	Black
NO. DESCRIPTION	QTY	MATERIAL	REMARK

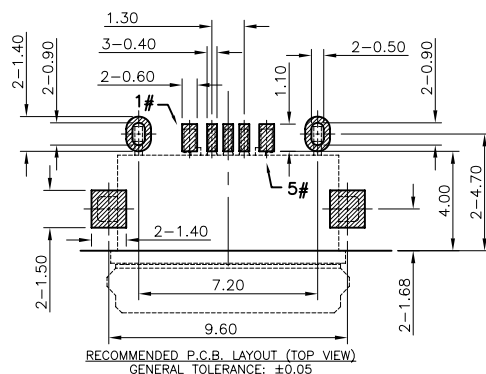

组装示意图

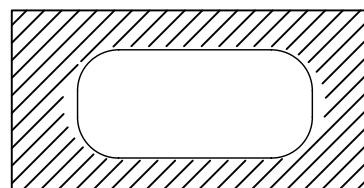

建议开槽尺寸
单边放大0.2mm

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1.1. RATING: 3A(PIN1&5), 0.5A(PIN2&3&4);
- 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
- 1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 1.4. INSULATION RESISTANCE: 1000MΩ MIN.;

2. DURABILITY: 10,000 CYCLES MIN.;

3. INSERTION FORCE: 3.5Kgf (35N) Max.;

4. EXTRACTION FORCE: 0.8Kgf (8N) Min.;

5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m, 30min)

6. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.

7. PACKAGING: TAPE & REEL.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2" X.X' ±0.5"

UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

MICRO USB 5P B口 带防水胶圈 前贴后插

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYCW196-USB05-720B

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-USB18090418

SHEET NO.

1 OF 1