

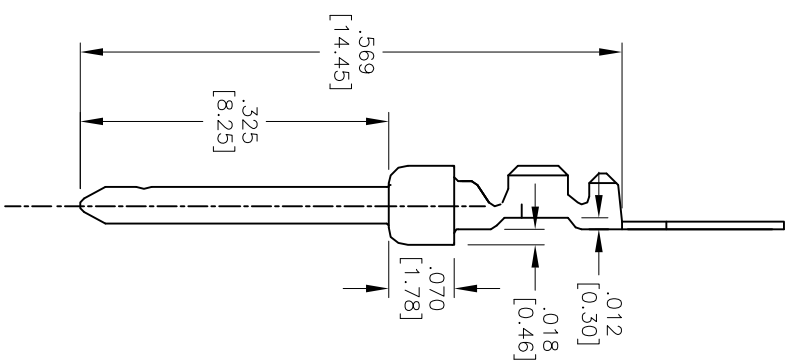



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/05	
A		REVISED LOW FEET DIM.	3/20/08	
B		REDRAWN	6/30/14	HR/QZL

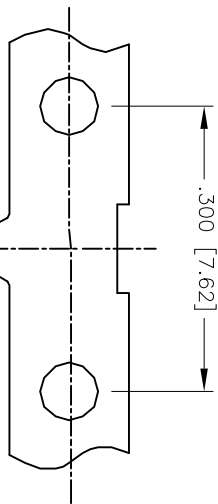

SPECIFICATIONS:

- Material: Phosphor Bronze
- Contact: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Contact resistance: 20 mohms max initial
- Mechanical:
 - Recommended wire range: 24-28 AWG
 - Temperature Rating:
 - Operating temperature: -55°C to +105°C
- Packaging:
 - B = Loose Cut
 - R = Tape and Reel
- Environmental:
 - Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010
 APPROVALS DATE

DRAWN	SS	1/11/05
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB PLUG CONTACT, 24-28 AWG
 GOLD FLASH

SIZE	PART NO.	REV.
X	DCP-01-X	B
REF:	S00087T	SCALE: NTS
		SHEET 1 OF 1