


**Ordering Information:**  
 D1275HWV-S-XP - \*\*\* - \*\*\*  
 1 2 3

- 1.Part NO.  
 2.Material:  
 (Blank): Nylon 9T,UL94V-0(Red)  
 6T: Nylon 6T,UL94V-0(Red)  
 46: Nylon 46,UL94V-0(Red)  
 GWT: Nylon 6T,UL94V-0(Black),  
 IEC 60335-1,5th Edition  
 Glow Wire Capable.  
 3.Color:  
 (Blank): see section 2 material  
 NAT:Natural  
 BK: Black

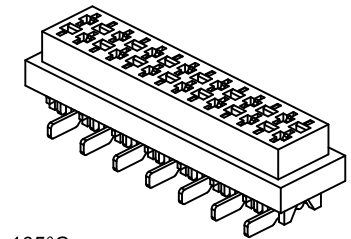

**SPECIFICATIONS:**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage:1500V AC/minute  
 Terminal Material: Phosphor Bronze/Tin over Nickel

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
4P	3.81	7.00	5.60	16P	19.05	22.24	20.84
6P	6.35	9.54	8.14	18P	21.59	24.78	23.38
8P	8.89	12.08	10.68	20P	24.13	27.32	25.92
10P	11.43	14.62	13.22	22P	26.67	29.86	28.46
12P	13.97	17.16	15.76	24P	29.21	32.40	31.00
14P	16.51	19.70	18.30	26P	31.75	34.94	33.54

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

TITLE  
**1.27mm PITCH VERTICAL  
 WAFER-SMD TYPE**

A2	CHANGE THE DRAWING	2023.04.20
A1	CHANGE THE DRAWING	2022.10.07
A0	NEW RELEASE	2016.09.20
REV	DESCRIPTION	DATE

General Tolerances  
 x.x±0.25  
 x.xxx±0.20  
 x.xxxx±0.15  
 ANGLES ±1°

THIRD ANGLE  
 PROJECTION

DRAWING NO.  
**D1275HWV-S-XP**

REV  
**A2**