

You are here: [Products](#) » [Connectors f.con](#) » [PCB connectors](#) » [Male headers](#) » [SL 21 THR ...](#) » [SL 21 THR 112](#)



► Heatsinks f.cool

► Cases f.case

▼ Connectors f.con

► Sockets

▼ PCB connectors

■ Male headers

■ Female headers

■ Direct female connectors

■ Jumpers

► IDC-connectors

► D-Sub connectors

■ Brackets for PC

► Optoelectronics


Male headers

SL 21 THR ...

SL 21 THR 112 14 G

□ 0.635 mm, standard

add to request

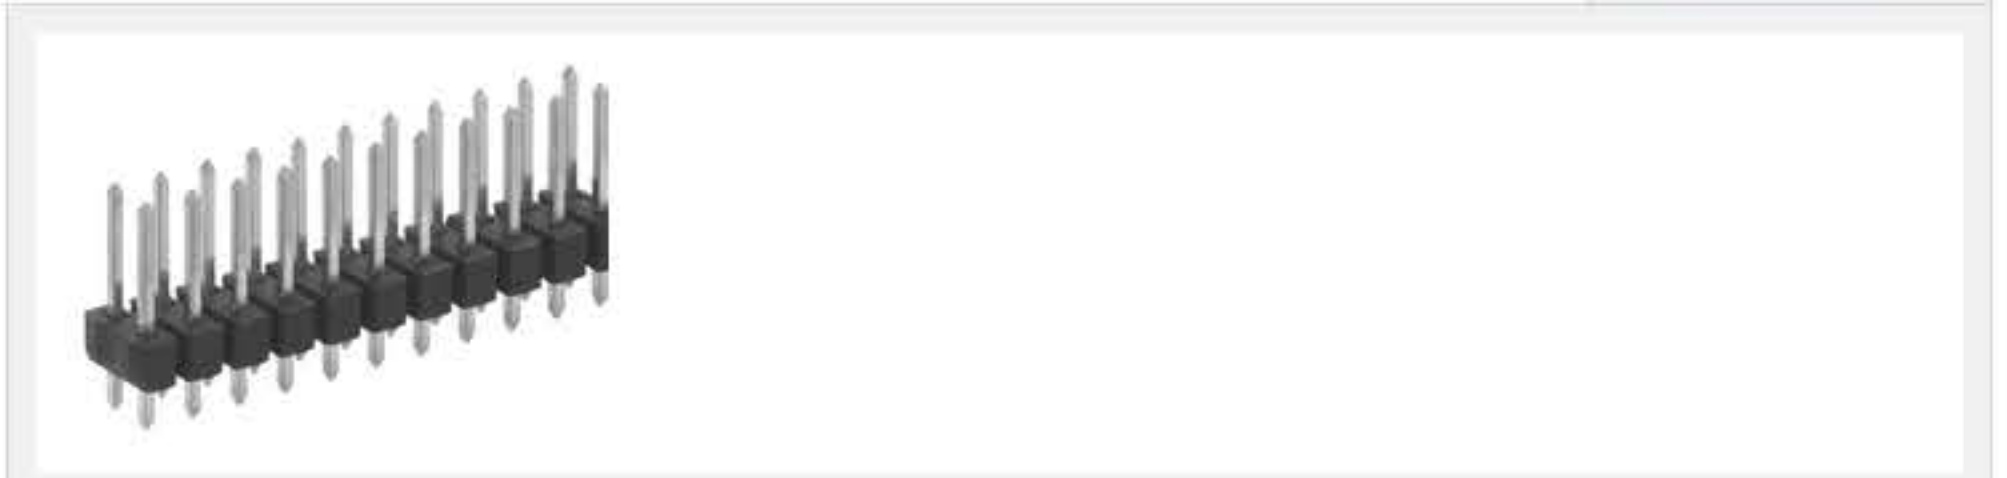

Features Technical Drawing Variants Service Accessories / related products

Article 1-10 of 17

1 | 2 > >>

Number per page: 10

Picture	Name
	►Female headers / BL 2 ... Stamped contact spring (fork contact), for □ 0...
	►Female headers / BL 4 ... Stamped contact spring (fork contact), for □ 0...
	►Female headers / BL LP 2 ... for □ 0.635 mm
	►Female headers / BL LP 4 ... for square 0.635 mm, packing in a bar magazine (min. 4 contacts)
	►Female headers / BL 12 ... for □ 0.635 mm, can be put through from above and below
	►Female headers / BL 21 ... □ 0.635 mm, can be put through from above
	►Female headers / BL 6 ... for □ 0.635 mm and up to 0.85 mm Ø
	►Female headers / BL 8 ... for □ 0.635 mm and up to 0.85 mm Ø, packing (option) bar magazine
	►Female headers / MK 221 ... □ 0.635 mm and up to 0.85 mm Ø; No capillary action when soldering due to protected contact insert...
	►Female headers / BL 10 ... □ 0.635 mm and up to 0.85 mm Ø, with aligned contact pin

Article 1-10 of 17

1 | 2 > >>