
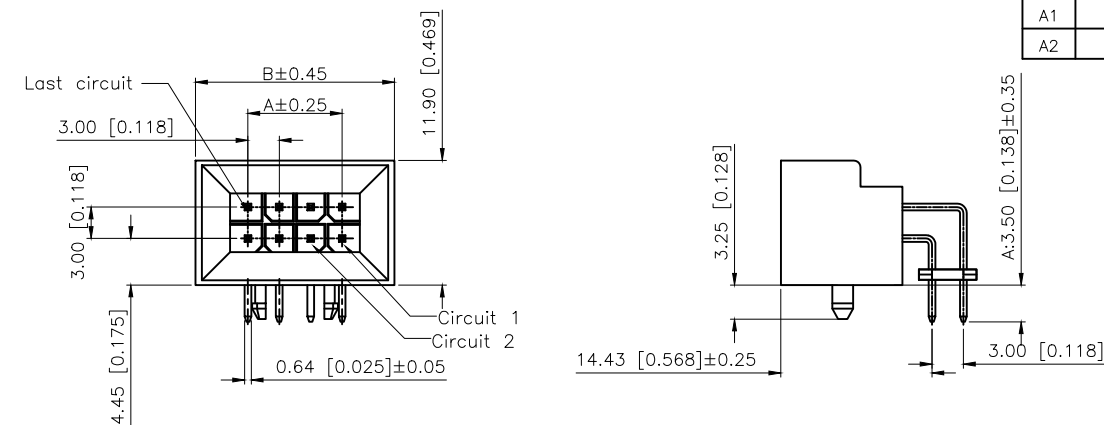


Specifications (规格):


- 1.Voltage rating(额定电压):DC 250V
- 2.Current rating(额定电流):5A AC/DC
- 3.Withstanding voltage(耐电压值): $\geq 1000V$ AC/minute
- 4.Insulation resistance(绝缘电阻): $\geq 1000M\Omega$ Min
- 5.Contact resistance(接触电阻): $\leq 20m\Omega$ Max
- 6.Temperature range(使用温度):-40℃~+125℃

PART NO.:


- X3025 W R-2x11 H-A P 9T SN
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ①Series No
 ②Category:W-Wafer
 ③Welding Board Angle:R-Stright 90°
 ④Row No-Pin No: 2xXX-2x02P~2x12P
 ⑤Special NO:H-Arrange usshering with positioning column
 ⑥Stitch length:A:3.5mm
 ⑦Category:P=Common type
 ⑧Material:9T-PA9T UL94V=0
 ⑨Planting:SN-Bright tin plating

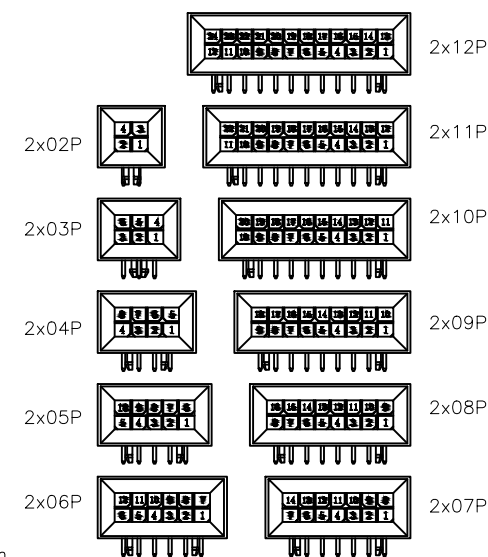


CIRCUIT SIZE LAYOUT

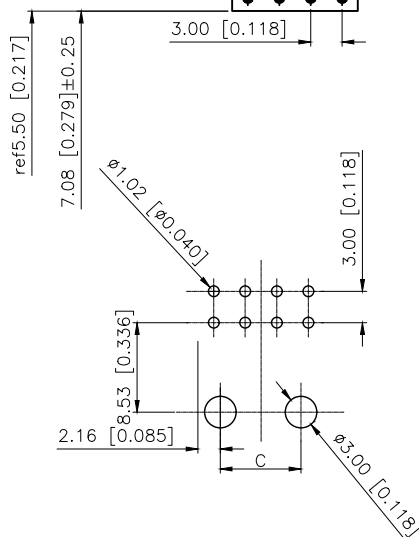

PCB Layout:TOP VIEW
TOLERANCE:±0.05
Poles:08~24P



PCB Layout:TOP VIEW
Poles:04P



PCB Layout:TOP VIEW
Poles:06P

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2x02	3.00	13.00	/	2x08	21.00	31.00	16.68
2x03	6.00	16.00	/	2x09	24.00	34.00	19.68
2x04	9.00	19.00	4.68	2x10	27.00	37.00	22.68
2x05	12.00	22.00	7.68	2x11	30.00	40.00	25.68
2x06	15.00	25.00	10.68	2x12	33.00	43.00	28.68
2x07	18.00	28.00	13.68				

X3025WR-2x11HAP-9TSN	PA9T	Brass	X3025HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED	TOLERAUCES



DESIGN	阿 树	VIEW: 	MODEL TYPE: 3.00 mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X3025WR-2x11HAP-9TSN
APPROVED		SIZE: A4	DWG NO.: X-X3025WR-2x11HAP-9TSN

SCALE	PAGE	REVISION
N/A	1/1	A2