
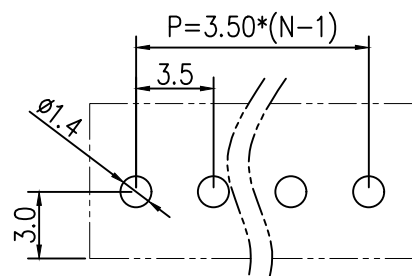
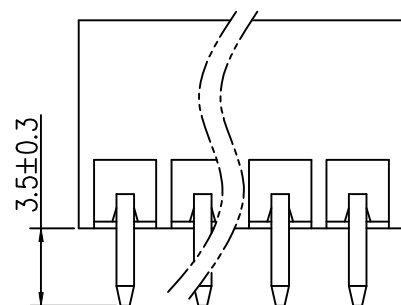
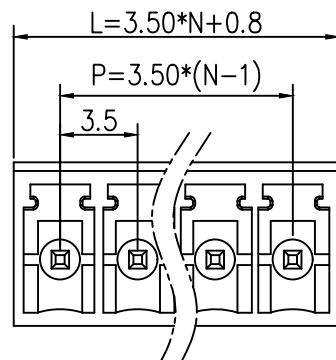


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

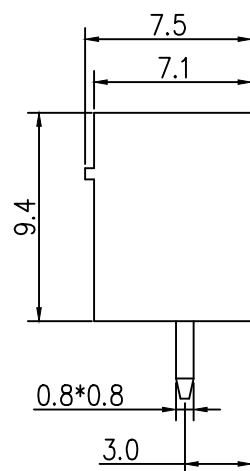

PCB LAYOUT

Materials and Electroplating

- ①. Plastic body: PA66,
- ②. Solder pin: copper, Nickel tin plating

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 ℃~+105 ℃

Instantaneous temperature: +250 ℃, 5 seconds

2	插针	铜	镀镍锡	
1	基座	PA66	绿色	
序号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名	接线端子																			
			TITLE																				
			料 号	HC-JXDZVC-3.5-7P																			
			PART NO																				
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 列	1 : 1																			
			单 位	MM	制 图																		
			UNIT		DRAW																		
<table border="1" data-bbox="1408 1342 1525 1396"><tr><th colspan="3">公差参数</th></tr><tr><th>Size</th><th>Dim P</th><th>Dim L</th></tr><tr><td>2-6P</td><td>±0.10</td><td>±0.20</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></table>			公差参数			Size	Dim P	Dim L	2-6P	±0.10	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	张 数	1 OF 1	审 核
公差参数																							
Size	Dim P	Dim L																					
2-6P	±0.10	±0.20																					
7-12P	±0.20	±0.30																					
13-18P	±0.25	±0.40																					
19-24P	±0.30	±0.50																					
X.X ±0.35			PART NO		夏操云																		
X.XX ±0.25																							
X.XXX ±0.15			版 本	批 准																			
			REV	APPROVE	赵亮亮																		
			A																				