
PART NO.:

X9555 H-2x04 E-PT XX
① ② ③ ④ ⑤ ⑥

■ SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤30mΩ

- ①Series No
②Category:H-HSG
③Row No-Pin No:2xXX-2x02P~2x32P
④Special No: E-Double convex one
atop the other With SWB Mark
⑤Material:PT-PBT UL94V-0
⑥Color:Blank-Natural Color

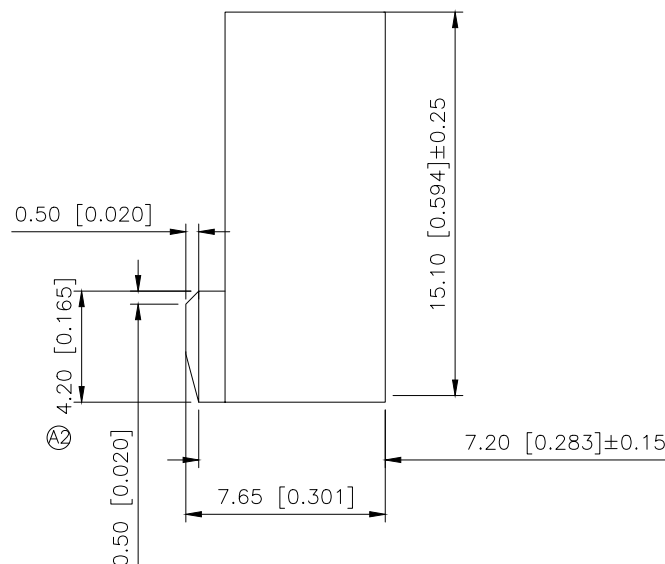

X9555H-2x04E-PT (2x02~2x13)	PA9T UL 94V-0	X9555T-A1	X9555W
X9555H-2xXE-PT (2x14~2x32)		X9555T-B1	
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

XKLB 星城 Connection

DESIGN	阿 树	VIEW: 	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X955H-2x04E-PT
APPROVED		SIZE: A4	DWG NO.: X-X955H-2x04E-PT

SCALE	PAGE	REVISION
N/A	1/1	A2