

Pitch:2.00x2.00mm(0.079 " x0.079 ")

Female Header Dual Rows Bottom Entry Type

ELETE
—Professional Connecting Solution—
HFLDT45 Series


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

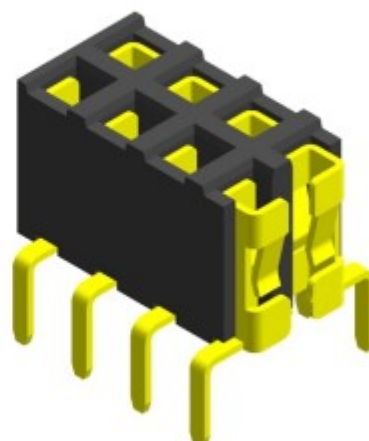


Mating with



HMLDSXX



HMLDSHXX



HMLDMHXX





HMLDR43





HMLDMXX



HMLDRXX

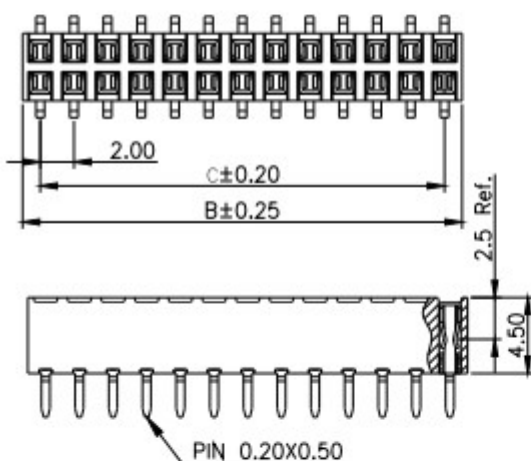

Recommended
P.C.Board
Layout



HMLDS43



HMLDPXX



HMLDRXX

PS:Suggested Mating Pin Length:>4.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	B		C	B		C	B		C	B
02	2.00	4.10	12	22.00	24.10	22	42.00	44.10	32	62.00	64.10
03	4.00	6.10	13	24.00	26.10	23	44.00	46.10	33	64.00	66.10
04	6.00	8.10	14	26.00	28.10	24	46.00	48.10	34	66.00	68.10
05	8.00	10.10	15	28.00	30.10	25	48.00	50.10	35	68.00	70.10
06	10.00	12.10	16	30.00	32.10	26	50.00	52.10	36	70.00	72.10
07	12.00	14.10	17	32.00	34.10	27	52.00	54.10	37	72.00	74.10
08	14.00	16.10	18	34.00	36.10	28	54.00	56.10	38	74.00	76.10
09	16.00	18.10	19	36.00	38.10	29	56.00	58.10	39	76.00	78.10
10	18.00	20.10	20	38.00	40.10	30	58.00	60.10	40	78.00	80.10
11	20.00	22.10	21	40.00	42.10	31	60.00	62.10			