
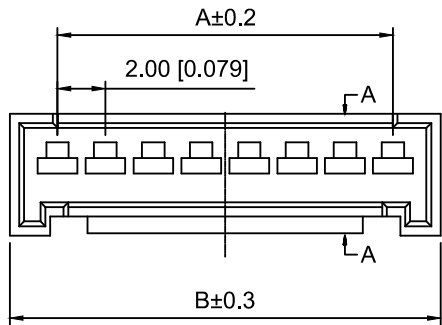


2 Pin

无定位槽



3D 图示（参考）

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-40℃~+85℃




温度范围: -40℃~+85℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

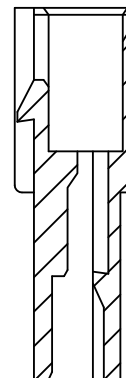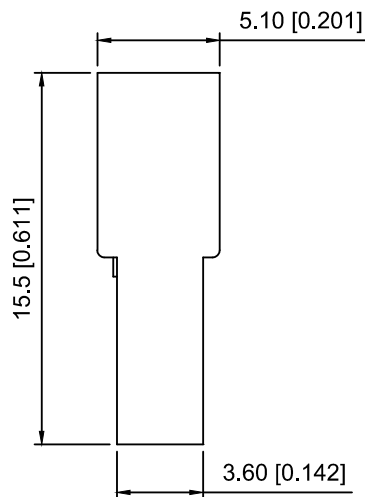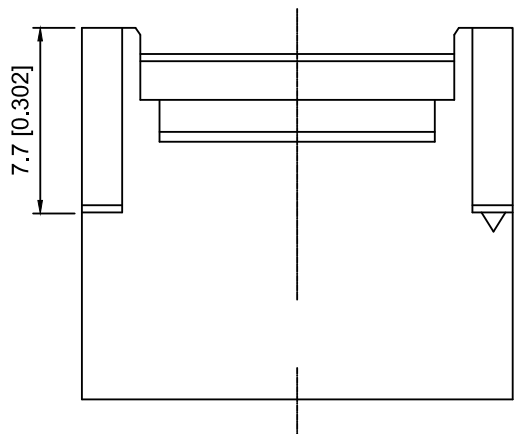

A-A

X2011 H F - 07 A - N0
① ② ③ ④ ⑤ ⑥

1.Series No

2.Category:H-HSG


3.Category:F-Female Housing

4.Row No.Pin No:XX-02~15 Pin

5.Special No:A-With Lock

6.Material:N0-PA66 UL94V-0

Circuit 1

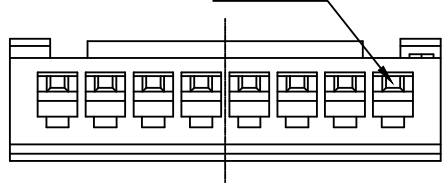

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	5.98	09	16.00	19.98
03	4.00	7.98	10	18.00	21.98
04	6.00	9.98	11	20.00	23.98
05	8.00	11.98	12	22.00	25.98
06	10.00	13.98	13	24.00	27.98
07	12.00	15.98	14	26.00	29.98
08	14.00	17.98	15	28.00	31.98

X2011HF-07A-N0	PA66	X2011W	X2011TM
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

					ANGLAR	±5°
Δ x					L≤ 4	±0.2
Δ x					4<L≤ 16	±0.3
Δ x					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector	
DWN	VIEW:	PART NO.: X2011HF-07A-N0	
CHKD	UNIT: mm/in	DWG NO.: X-X2011HF-07A-N0	
APPD	SIZE: A4	WEIGHT	SHEET
			1/1
		REVISION	A0