







REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.24	阿树

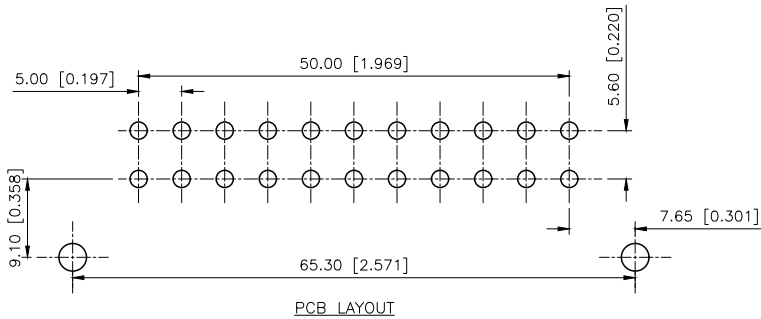

PCB LAYOUT

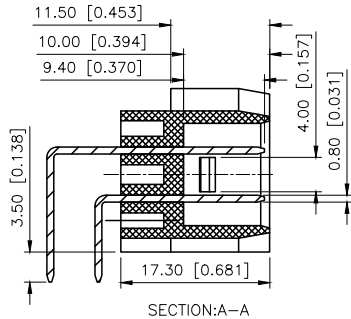

SECTION:A-A

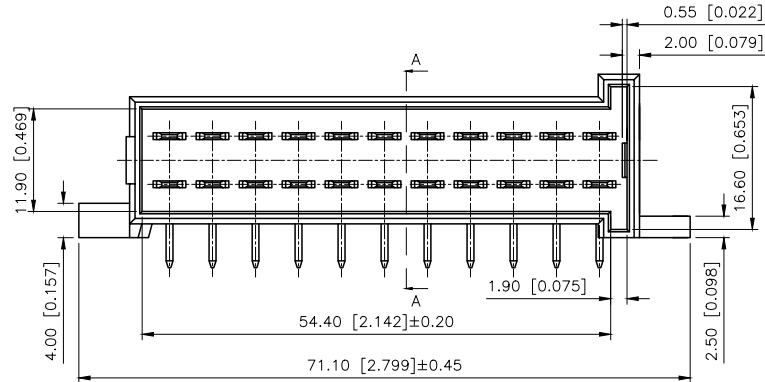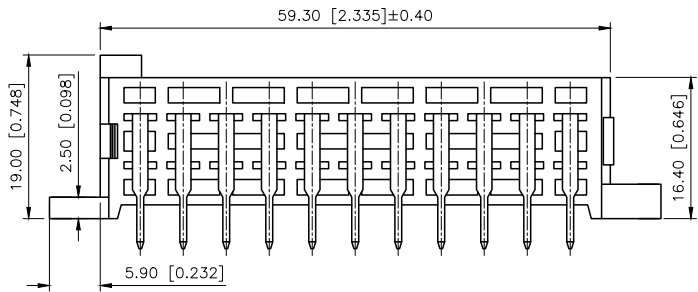
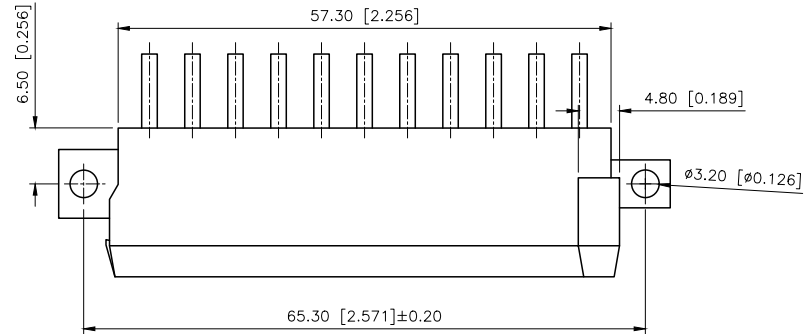


Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range:-40℃~+125℃
温度范围: -40℃~+125℃

PART NO.:

K 828801 W R-2xXX-P SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:W-Wafer
- ④Welding Board Range:R-Stright 90°
- ⑤Row No.Pin No:2xXX-2x11 Pin
- ⑥Material:PT-PBT+GF30 Plating
- ⑦Palting:SN-Plated Tin

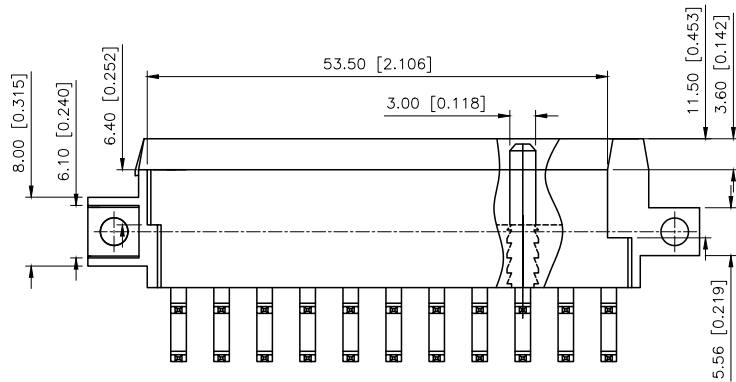

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 5.0mm Automobile connector		
CHECKED		UNIT:	mm/in	PART NO.: K828801WR-2x11-PTS		
APPROVED		SIZE:	A4	DWG NO.:		
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1

K828801WR-2xXX-PTS	PBT	Brass	K828801H
PART NO	Material	Material(Pin)	Suitable XKB Housing

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn