

1

2

3

4

A

B

C

D



A

B




C

D

| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.06.26 | 阿树     |

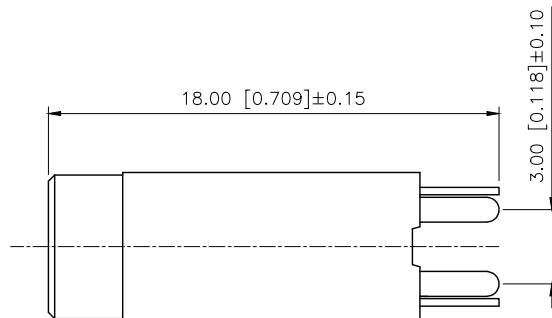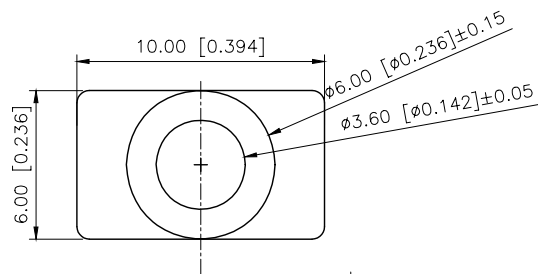

Temperature -20~70C  
Rated Load DC30V 0.3A  
Contact Resistance <30mΩ  
Insulation Resistance >100MΩ  
Withstand Voltage AC500V(50Hz)/min  
Actuating Force 2.2~30N  
Life 3000 Cycles

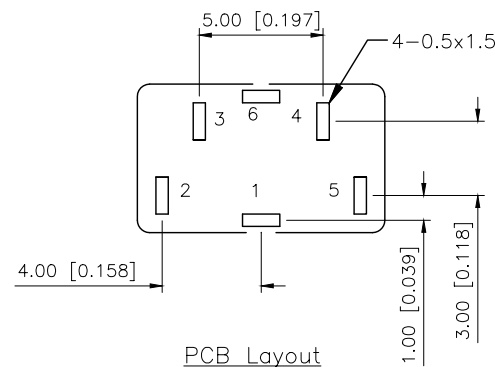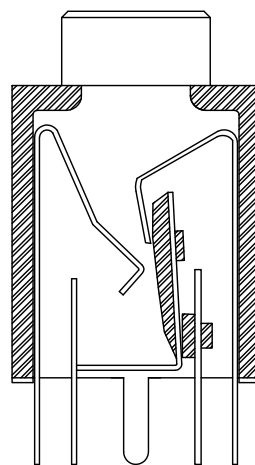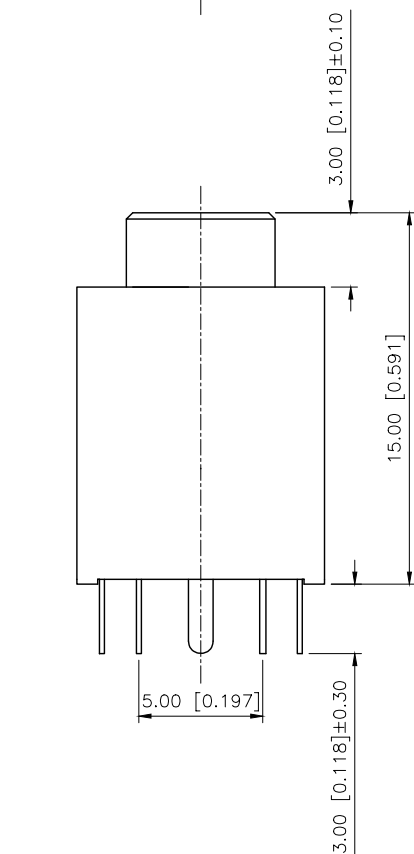

|           |                 |
|-----------|-----------------|
| Model No. | PJ-359-X        |
| Schematic |                 |
| color     | B:Black W:White |

|            |                 |         |
|------------|-----------------|---------|
| base       | PBT             |         |
| Plastic    | Pom             |         |
| Plastic    | PA66            |         |
| Terminal 6 | Phosphor Bronze | Ag      |
| Terminal 5 | Phosphor Bronze | Ag      |
| Terminal 4 | Phosphor Bronze | Ag      |
| Terminal 3 | Phosphor Bronze | Ag      |
| Terminal 2 | Phosphor Bronze | Ag      |
| Terminal 1 | Phosphor Bronze | Ag      |
| PAPT NAMF  | MATERIAL        | PLATING |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |       |       |             |                |
|----------|----|-------|-------|-------------|----------------|
| DESIGN   | 阿树 | VIEW: |       | MODEL TYPE: | 3.5 PHONE JACK |
| CHECKED  |    | UNIT: | mm/in | PART NO.:   | PJ-359-B       |
| APPROVED |    | SIZE: | A4    | DWG NO.:    | X-PJ-359-B     |

1

2

3

4