
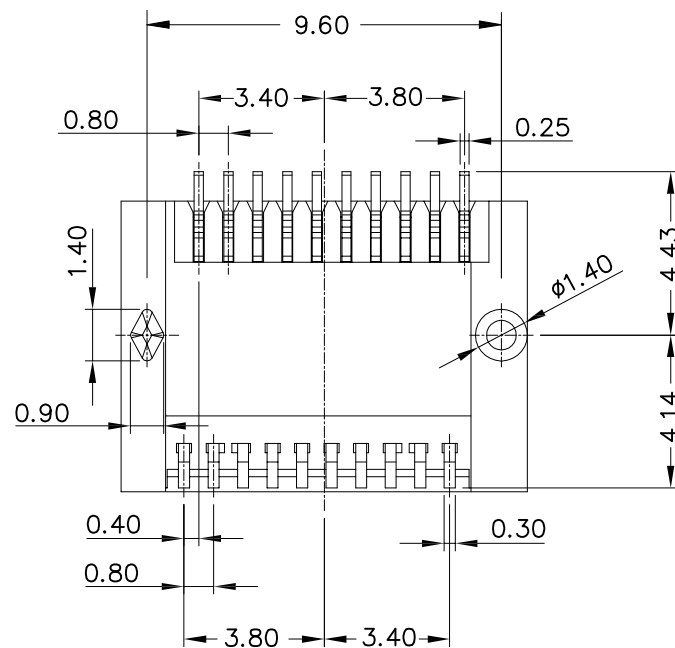
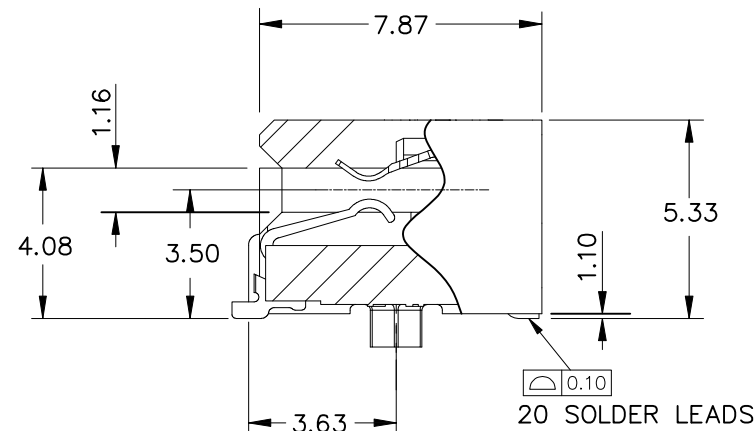


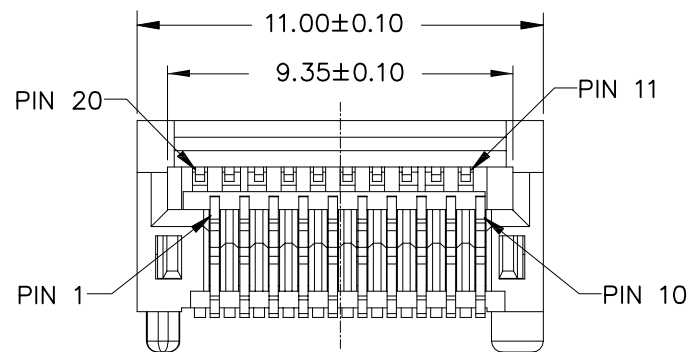

MATERIAL:

CONNECTOR - SMT

PLASTIC HOUSING:

LCP, FLAMMABILITY RATING UL94-V0

CONTACT:

PHOSPHOR BRONZE

PLATING: CONTACT AREA PLATE NICKEL $1.27\mu\text{m}$ MIN,


PLATE Gold $0.76\mu\text{m}$ MIN


PACKAGING: TAPE AND REEL (500 PER)

TEMPERATURE RANGE: -40°C TO $+85^{\circ}\text{C}$

TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: SFP28 CONNECTOR ASSEMBLY 20 POSITION					
LINEAR	ANGLES			PART NO. UMAX82L1301					
X,±0.40	X°,± 3°			DWG NO. C-UMAX822201					
.X,±0.30	.X°± 2°	APPD: Jason	MAT'L:		UNITS	SCALE	SHEET	REV	
.XX,±0.20	.XX°± 1°	CHKD: Schumi	FINISH:		MM	1 : 1	1 OF 2	1	
.XXX,±0.10	.XXX°± 0.5°	DRWN:Lei Songping	Q'TY:						

REV	ECN NO.	NAME	DATE

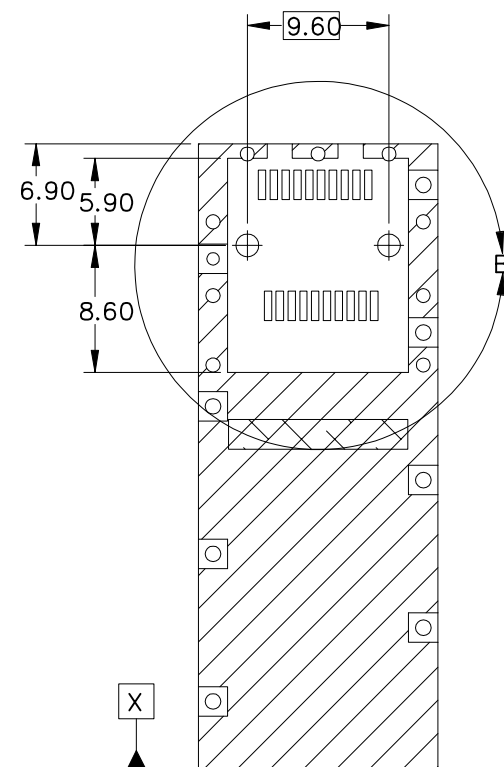

TOLERANCE		 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: SFP28 CONNECTOR ASSEMBLY 20 POSITION				
LINEAR	ANGLES			PART NO. UMAX82L1301				
X,±0.40	X°,± 3°			DWG NO. C-UMAX822201				
.X±0.30	.X°± 2°	APPD: Jason	MAT'L:		UNITS	SCALE	SHEET	REV
.XX±0.20	.XX°± 1°	CHKD: Schumi	FINISH:		MM	1 : 1	2 OF 2	1
.XXX±0.10	.XXX°± 0.5°	DRWN: Lei Songping	Q'TY:					