
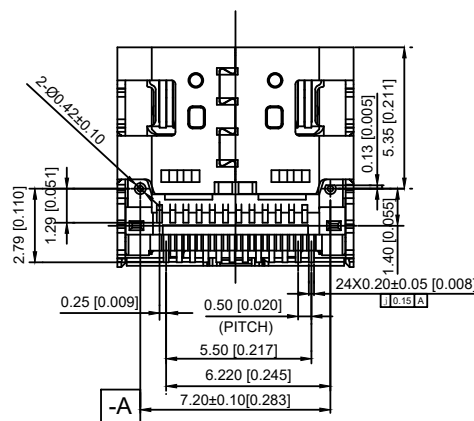
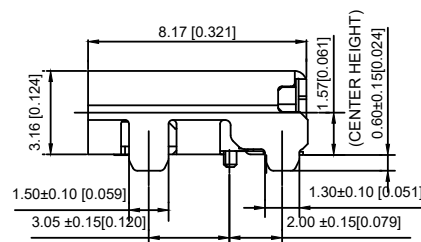
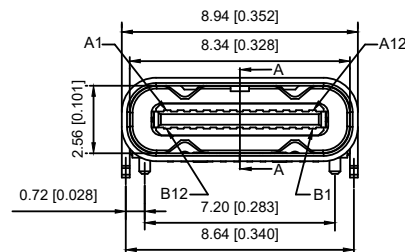




2.8工作温度 Operating temperature: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

01:AU 1U"Min
03:AU 3U"Min
05:AU 5U"Min
10:AU 10U"Min
15:AU 15U"Min
30: AU 30U"Min

1:PBT
2:PA6T
3:PA9T
4:LCP

W:WHITE
B:BLACK

					ANGLAR	±5°
Δx					L ≤ 4	±0.2
Δx					4 < L ≤ 16	±0.3
Δx					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dq.cn						



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1		
DWN		VIEW: 	PART NO.: U262-243N-3BVC84		
CHKD		UNIT: mm/in	DWG NO.: X-U262-243N-3BVC84		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0