
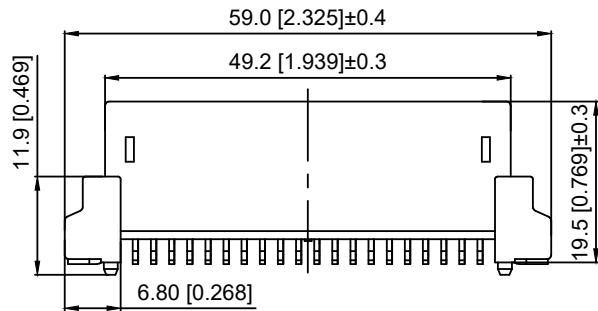
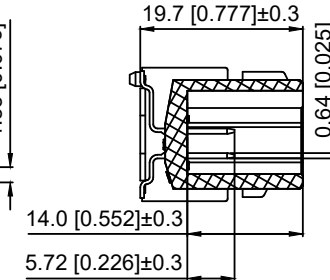
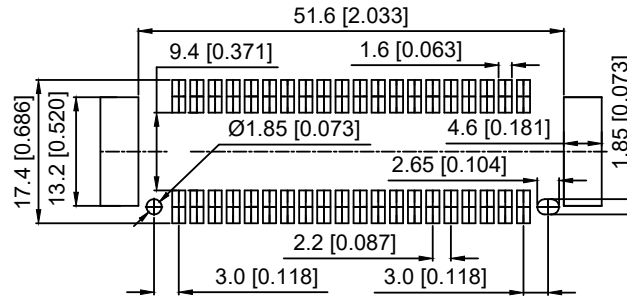




Current rating:3A AC/DC
 额定电流: 3A AC/DC
 Temperature range:-40℃~+245℃
 温度范围: -40℃~+245℃

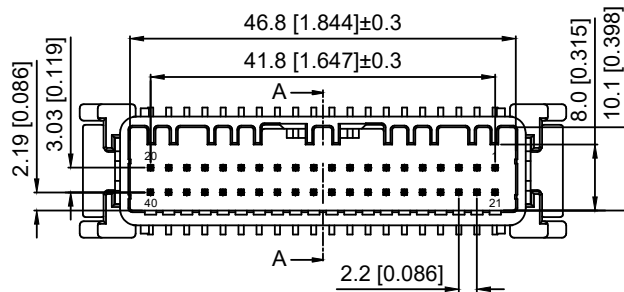

SEC:A-A

- K 137635 W V S - 2x20 - PS SW
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧
- 1.K: XKBTEK-Car Connector
 - 2.XKB Series No
 - 3.Category:W-Wafer
 - 4.Welding Board Range:V-Stright 180°
 - 5.Welding Way:S-SMT
 - 6.Row No.Pin No:2xXX-2x20 Pin
 - 7.Material:PS-PPS+GF40% (Black color)
 - 8.Palting:SW-Matte Tin Plated

PCB Layout

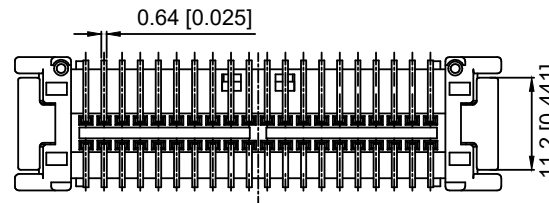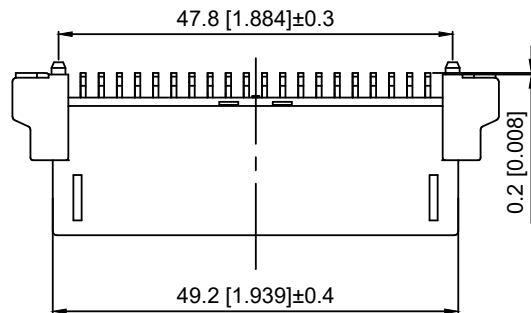

K137635WVS-2x20-PSSW	PPS	Brass	K137635HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 2.2mm Automobile connector
DWN	VIEW:	PART NO.: K137635WVS-2x20-PSSW
CHKD	UNIT: mm/in	DWG NO.: X-K137635WVS-2x20-PSSW
APPD	SIZE: A4	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
Δx					16 < L ≤ 63 ±0.4
Δx					L > 63 ±0.5
REVISIONS					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0