



Kinghelm®

PICK UP AREA

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始图档		GPYI	GPYI	20181104

PRODUCT NO.

1. SPECIFICATIONS:





- 1.1. CONTACT RESISTANCE:80 mΩ MAX
- 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
- 1.3. CURRENT RATING:1.0A/MAX
- 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
- 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
- 1.6. DURABILITY:2000 CYCLES
- 1.7. OPERATING TEMPERATURE:-20°C~80°C

2. MATERIAL:

- 2.1. STAINLESS STEEL T=0.10±0.005MM

3. FINISH:

- 3.1. 30u" MIN. NICKEL UNDERPLATING OVERALL

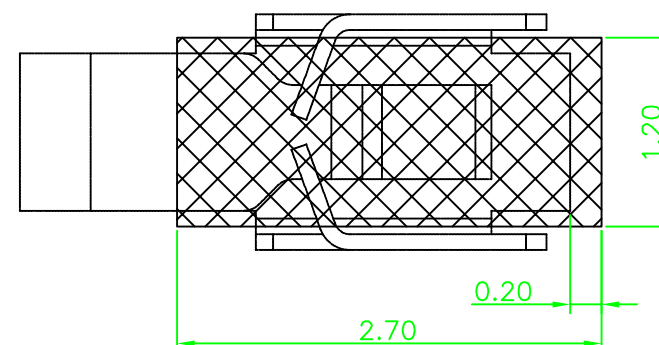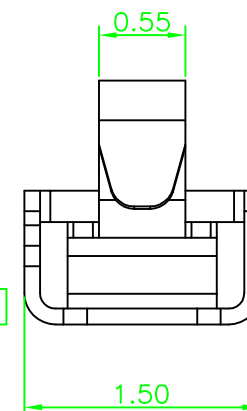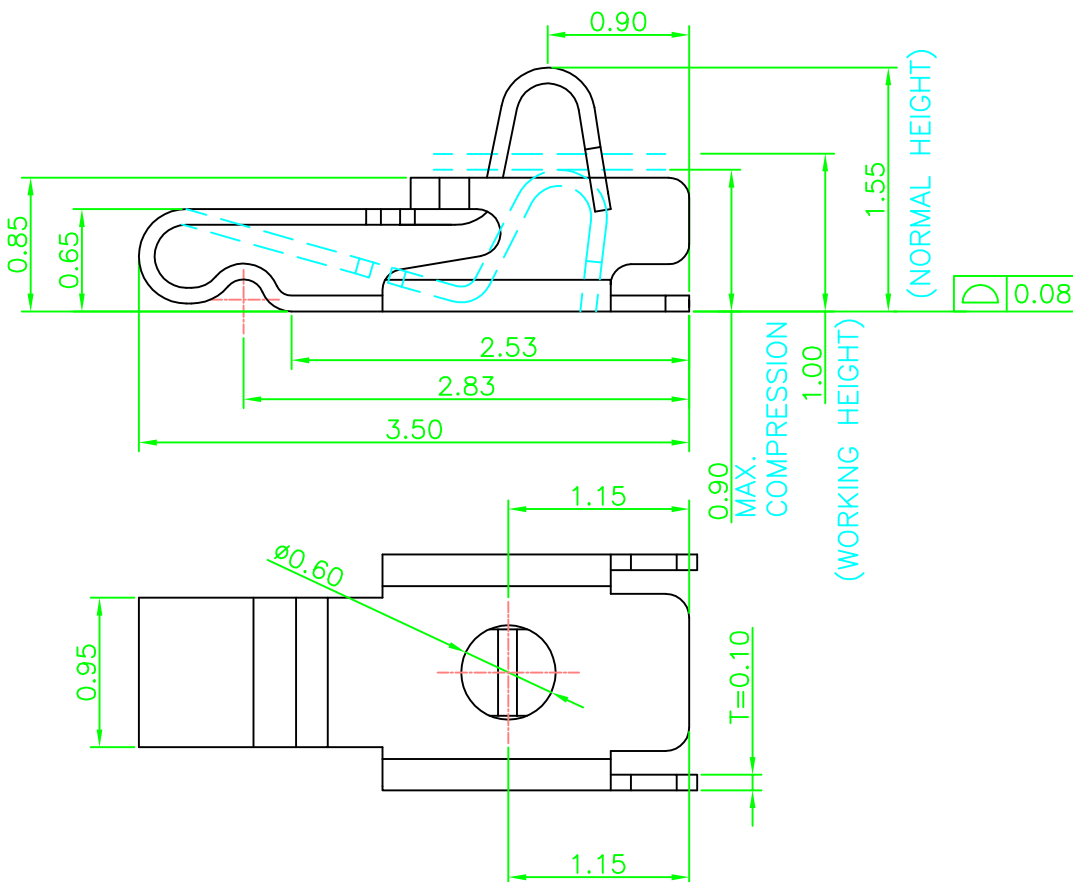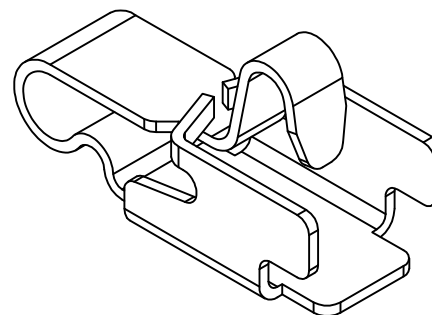

P.C.B LAYOUT
TOLERANCE:±0.05

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	UNIT: MM	深圳市金航标电子有限公司 www.kinghelm.com.cn 0755-28190160	
			MATERIAL: HRC:			
▼=0	DISTANCE	ANGLE	DRAWN BY	DATE	TITLE: 天线弹片 3.50*1.50*1.55H(A款)	
▽=0	.X ±0.35	X.° ±2.0°	GPYI	2018.11.04		
	.X ±0.25	.X.° ±1.0°	CHECKED BY	DATE	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	
	.XX ±0.15	.XX.° ±0.5°	GPYI	2018.11.04		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	PART NO. KH-351515-TP	DWG NO.
						SHEET NO. 1/1

A4