

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

Materials and Electroplating

- ①. Plastic body: PA66
②. Solder pin: copper, Nickel tin plating
③. Nut: Copper, Nickel Plated

Electrical performance

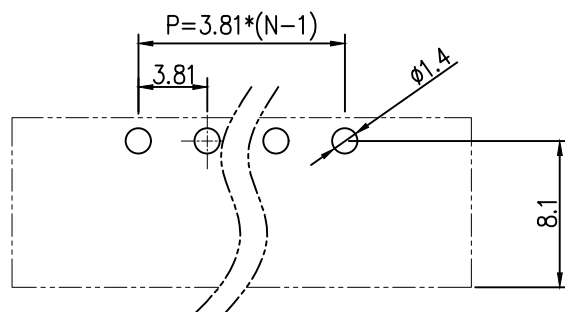

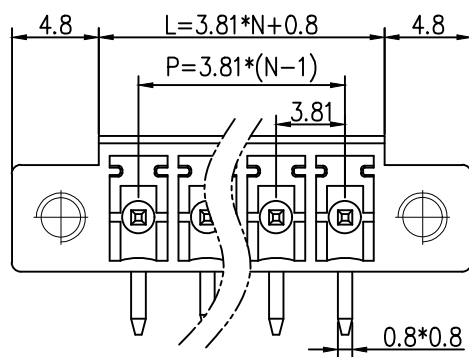
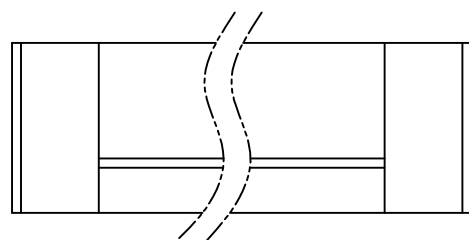
Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 $^{\circ}\text{C}$ ~+105 $^{\circ}\text{C}$ Instantaneous temperature: +250 $^{\circ}\text{C}$, 5 seconds

PCB LAYOUT

2	插针	铜	镀镍锡	
1	底座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	接线端子	
			料号 PART NO	HC-JXDZRM-3.81-3P	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1		
公差参数 Tolerance Parameters		单位 UNIT	MM	制图 DRAW	AhYe
张数 PART NO		1 OF 1	审核 CHECKED	夏操云	
版本 REV		A	批准 APPROVE	赵亮亮	