

1

2

3

4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.27	阿树

SPECIFICATION

规格

Rating:DC 30V 0.5A

额定值: 30V 0.5A

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ

Insulation resistance:≥100mΩ

绝缘电阻: ≥100mΩ

Inertion and extraction force:3~30N

插拔力:3~30N





Life test:5,000 cycles

寿命: 5,000次循环

PJ-342CB-TX-SMT

G:Gold plating

S:Silver plating

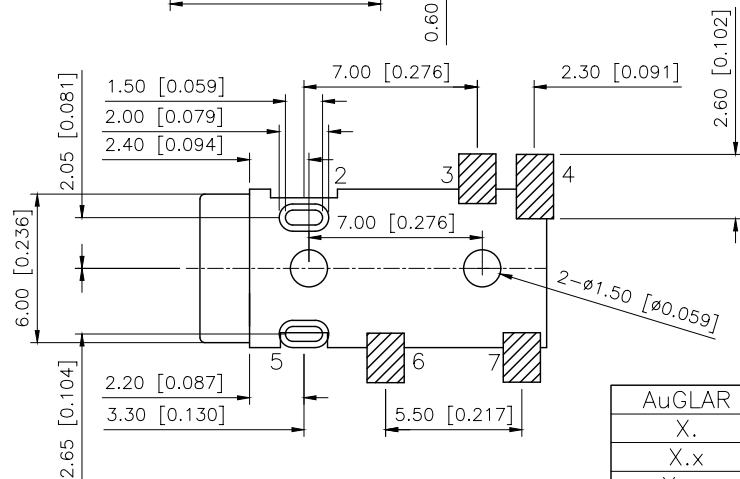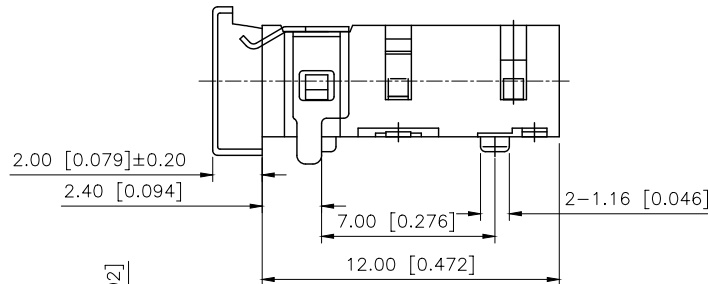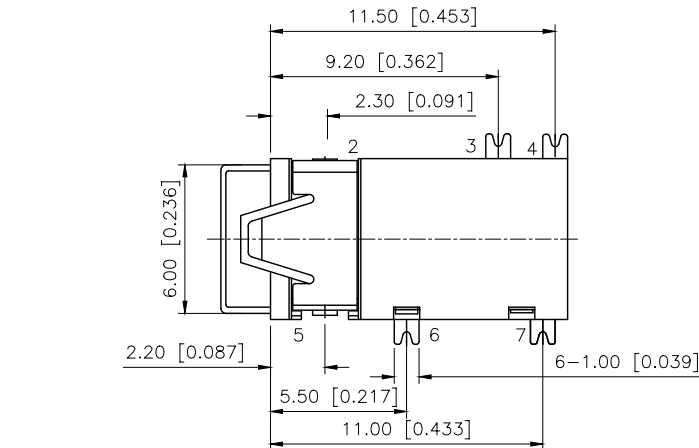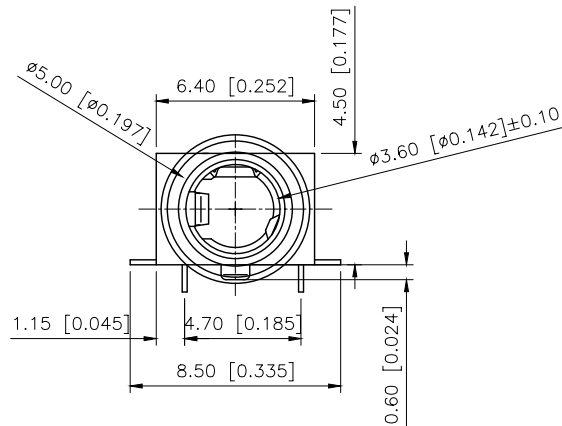

PCB Layout

Model No.	PJ-342CB-TX-SMT
Schematic	

Plastic	High Temp. Thermoplastic	
Terminal 7	Phosphor Bronze	Ag
Terminal 6	Phosphor Bronze	Ag
Terminal 5	Phosphor Bronze	Ag
Terminal 4	Phosphor Bronze	Ag
Terminal 3	Phosphor Bronze	Ag
Terminal 2	Phosphor Bronze	Ag
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-342CB-TS-SMT
APPROVED		SIZE: A4	DWG NO.: X-PJ-342CB-TS-SMT
		SCALE	PAGE
		N/A	1/1
		REVISION	A1

1

2

3

4