



Kinghelm®

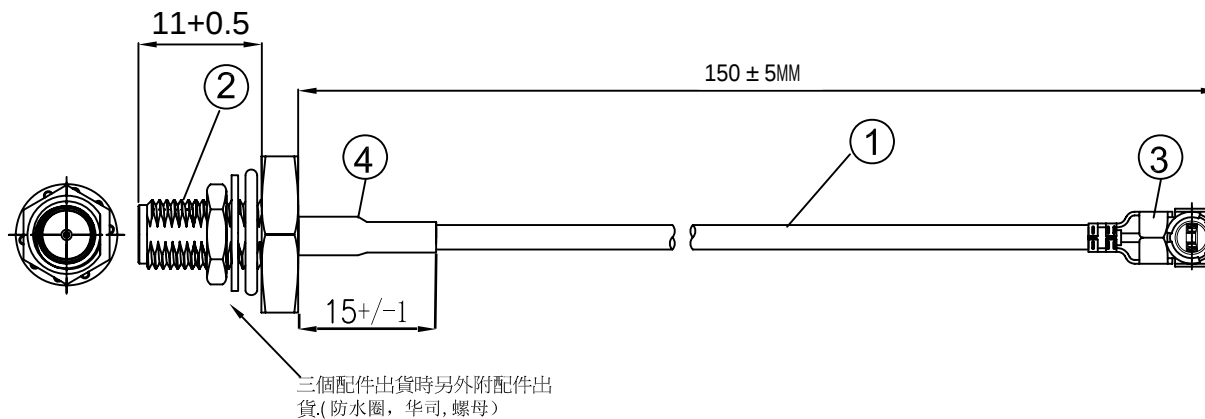

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
4	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX ,1.13端子, 镀金	1
②	接头	SMA防水母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

深圳市金航标电子有限公司				WWW.BDS666.COM					
型号：KH-FS150-SMA11L				0755-83044319					
ALL DIMENSION ARE IN MM		DRAWN Jamy		DATE 2018 /09 /24		I-PEX 1.13 TO SMA11牙防水母头 L=150MM			
		ENG.							
		MFG.							
COMPUTER GENERATED IN SOLIDWORKS		Q.A.							
DO NOT SCALE THIS DRAWING									
PROJECTION 		GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150				SIZE Number		REV A	
						SCALE: Free		TYPE	