

RAK12033 WisBlock 6-Axis Accelerometer Sensor Module Datasheet

Overview

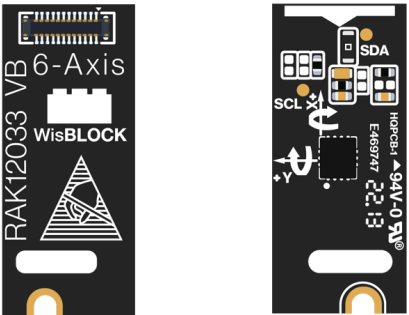


Figure 1: RAK12033 WisBlock 6-Axis Accelerometer Sensor Module

Description

RAK12033 is a 6-axis Accelerometer sensor module, part of the RAKWireless WisBlock Sensor series. The module is based on IIM-42652 from TDK InvenSense. It is a smart industrial motion tracking device that supports an extended operating temperature range. The module is combined with a 3-axis gyroscope and a 3-axis accelerometer. RAK12033 can measure the angular rate and report data through a standard I2C digital interface that speeds up to 1 MHz.

Features

- **Voltage supply:** 3.3 V
- **Current consumption:** 46.7 uA to 959 uA
- **Chipset:** TDK InvenSense IIM-42652
- **Gyroscope output range:** ± 15.625 , ± 31.25 , ± 62.5 , ± 125 , ± 250 , ± 500 , ± 1000 , and ± 2000 degrees/sec
- **Accelerometer output range:** $\pm 2g$, $\pm 4g$, $\pm 8g$, and $\pm 16g$
- **20,000 g shock tolerant**
- **I2C digital interface**
- **Operating temperature:** $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
- **Module size:** 10 x 23 mm

Specifications

Hardware

The hardware specification is categorized into six parts. It shows the chipset of the module and discusses the pinouts, sensors, and the corresponding functions and diagrams. It also covers the electrical and mechanical parameters that include the tabular data of the functionalities and standard values of the RAK12033 WisBlock 6-Axis Accelerometer Sensor Module.

Chipset

Vendor	Part number
TDK InvenSense	IIM-42652

Pin Definition

The RAK12033 WisBlock 6-Axis Accelerometer Sensor Module comprises a standard WisBlock connector. The WisBlock connector allows the RAK12033 module to be mounted to a WisBlock Base board. The pin order of the connector and the pinout definition is shown in **Figure 2**.

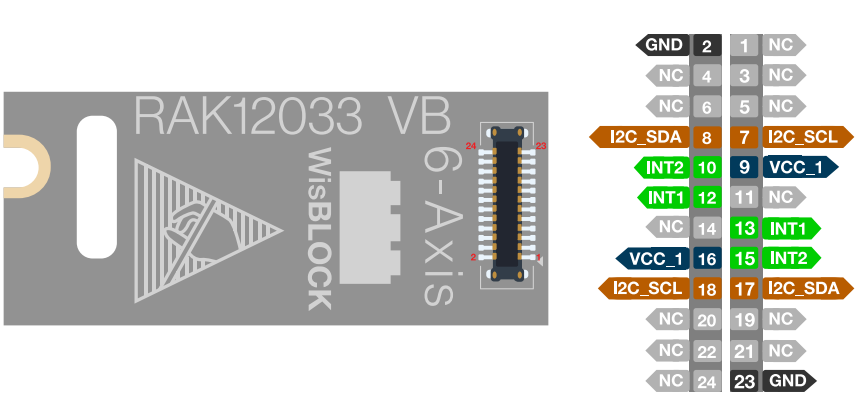


Figure 2: RAK12033 pinout diagram

 **NOTE:**

I2C related pin, **INT1**, **INT2**, **VDD**, and **GND** are connected to WisBlock connector.

If a 24-pin WisBlock Sensor connector is used, the IO used for the output pulse depends on what slot the module is plugged in. The following table shows the default IO used for different slots:

INT1 (Interrupt Pin 1)

SLOT C	SLOT D	SLOT E	SLOT F
IO3	IO5	IO4	IO6

INT2 (Interrupt Pin 2)

SLOT C	SLOT D	SLOT E	SLOT F
IO4	IO6	IO3	IO5

Electrical Characteristics

Symbol	Description	Min.	Typ.	Max.	Unit
VCC	Power supply voltage	-	3.3		V
IDD	VDD supply current timekeeping I2C-bus inactive, CLKOUT disabled, average current	-	755	959	uA
IDDS	Standby current	-	46.7	-	uA

Mechanical Characteristics

Board Dimensions

Figure 3 shows the dimensions and the mechanic drawing of the RAK12033 module.

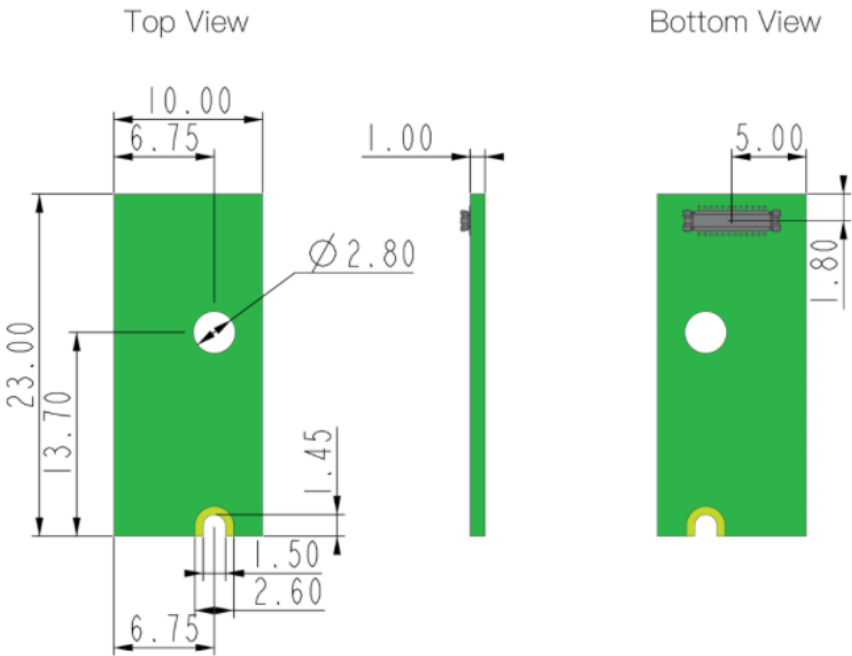


Figure 3: RAK12033 mechanical dimensions

WisBlock Connector PCB Layout


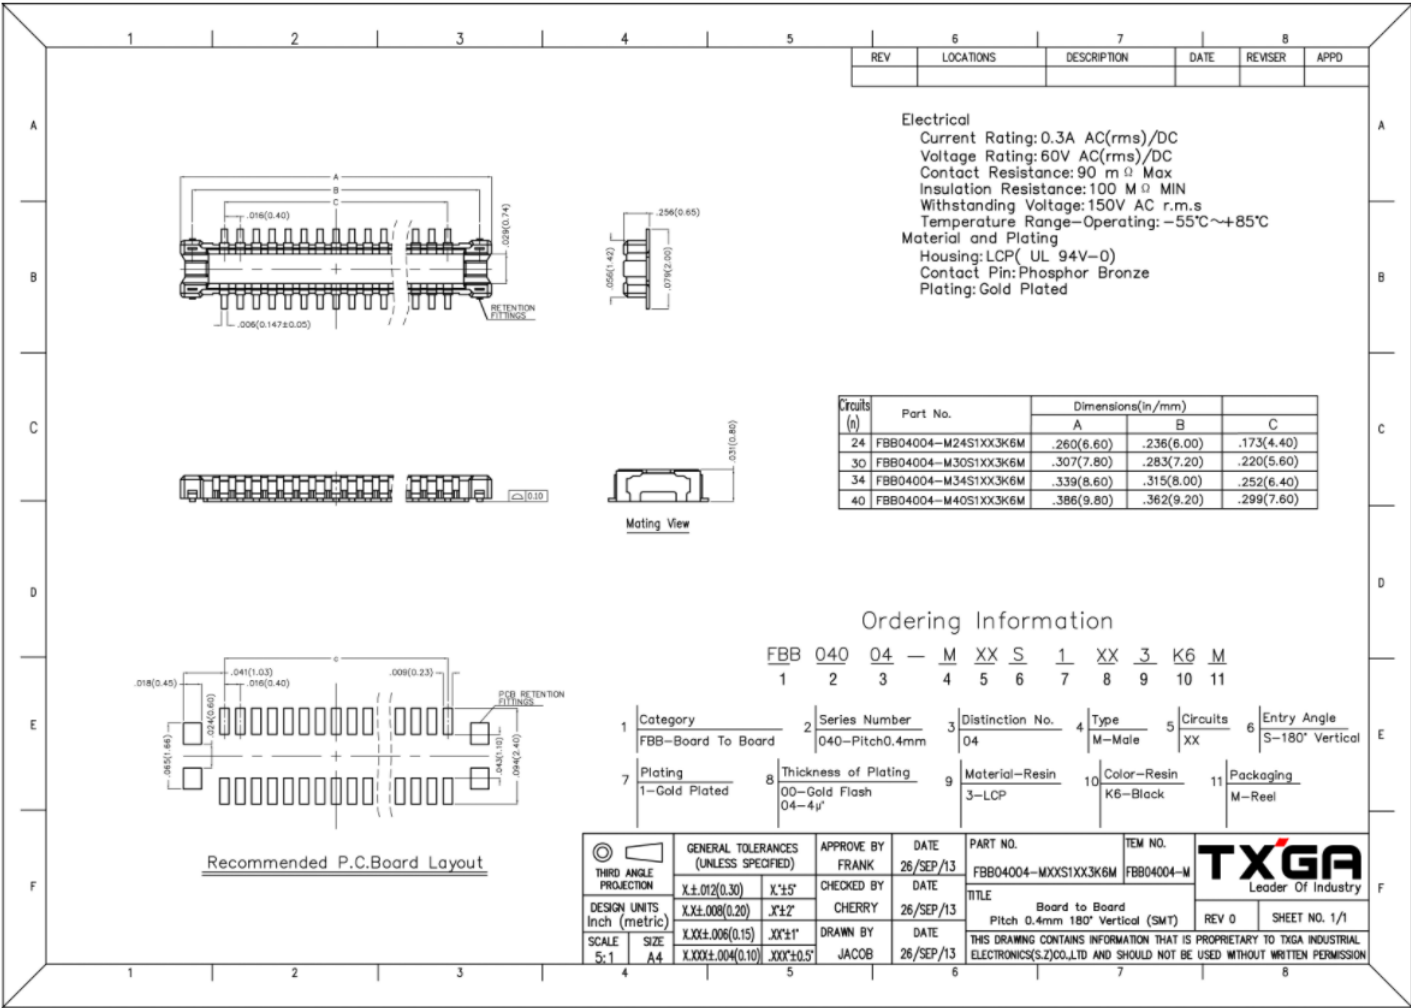


Figure 4: WisBlock Connector PCB footprint and recommendations

Schematic Diagram



6-Axis Gyroscope + Accelerometer



⚠ WARNING

Last Updated: 3/18/2023, 12:43:08 PM