



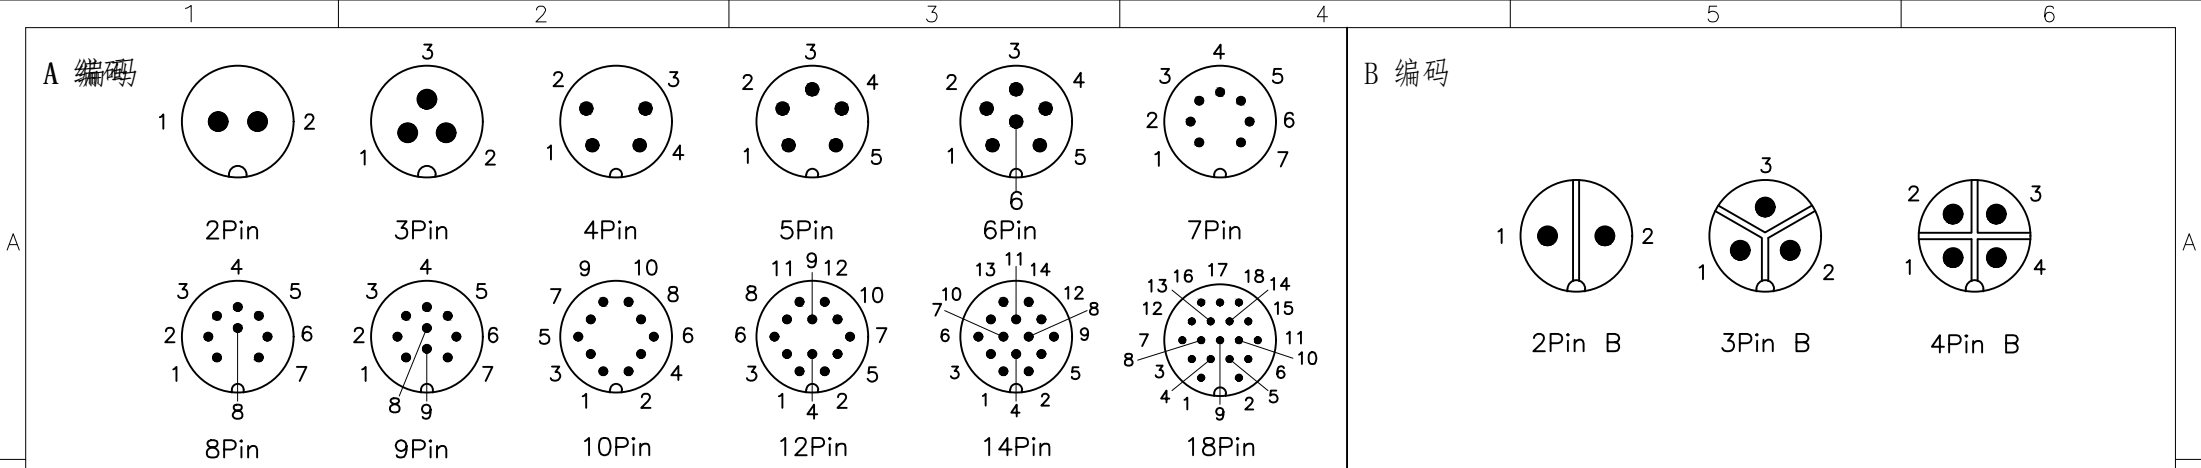

芯数	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P	14P	18P	2P B	3P B	4P B	
额定电压	125V	125V	125V	125V	125V	60V	60V	60V	60V	60V	60V	30V	300V	300V	300V	
额定电流	20A	20A	10A	10A	10A	5A	5A	5A	5A	5A	5A	2A	20A	20A	20A	
防水等级	IP67/IP68															
使用温度	-45°C~105°C															

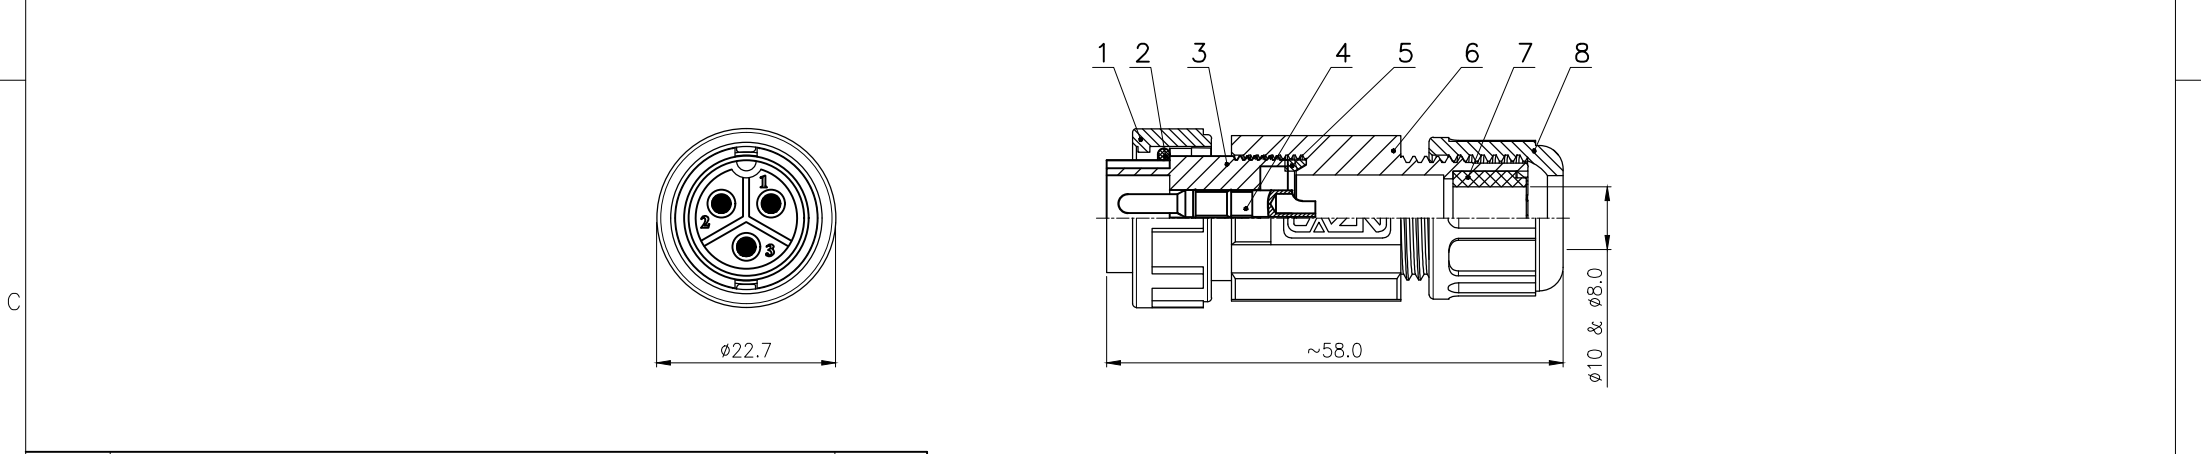

8	E13 紧锁螺帽	1
7	E13 组装式防水硅胶塞 70° 硅橡胶	1
6	E13 插头主体	1
5	E13 组装式主体防水垫片 70° 硅橡胶(橙色) $\phi 14.8 \times \phi 12-2.7$	1
4	E系列 焊线式公针长针	2~18
3	E13 针型插头外壳	1
2	E13 插头胶芯O型防水圈 70° 硅橡胶(红色) $\phi 14 \times \phi 11 \times 1.5$	1
1	E13 卡扣式连接螺帽	1
序号 (No.)	名称 (Name)	数量 (Qty)

GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤ 10

± 0.1

$< 10 \sim \leq 20$


± 0.2

$< 20 \sim \leq 50$

± 0.5

Angle

$\pm 1^{\circ}$



THIRD ANGLE

DWN

CHK

APVD

UNIT
MM

REV
A

SIZE
A4



CASN 正成

TITLE
E13 卡扣式针型组装式插头

PART NO

DRAWING NO
E13P-BA1-Px