


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.18	阿树

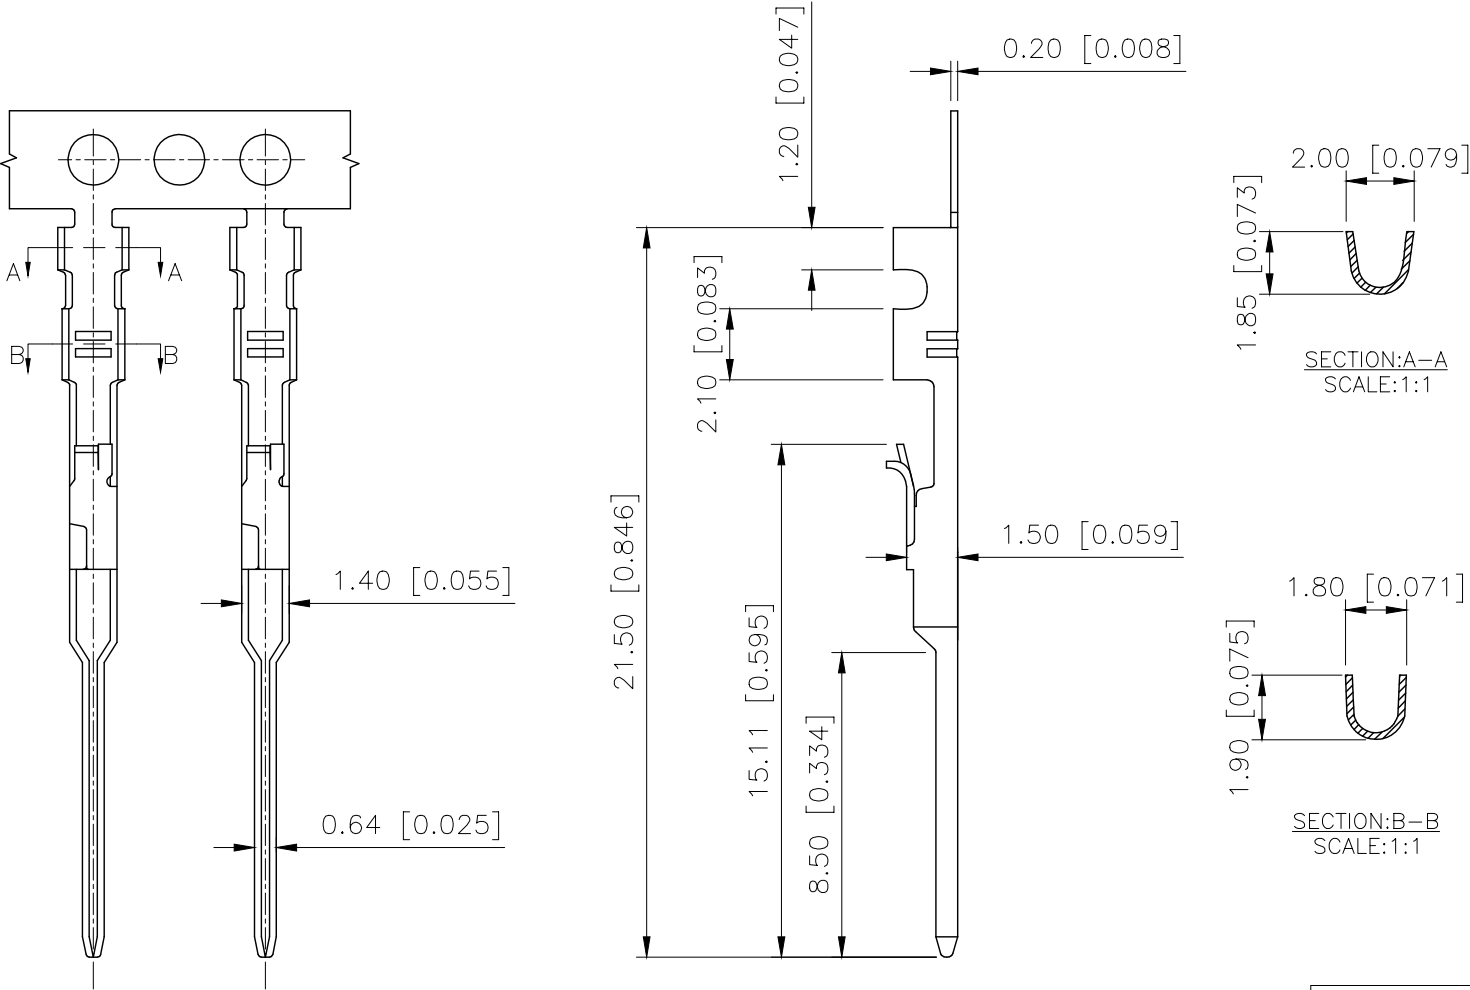

- SPECIFICATIONS
- Voltage rating: 250V AC/DC
 - Current rating: 3A AC/DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -40°C ~ +125°C
 - Insulation resistance: $\geq 1000M\Omega$
 - Contact resistance: $\leq 20m\Omega$

PART NO.:
X9556 ① ② M-P ③ ④ SN ⑤

- ① Series Number.
② Category: T-terminal
③ Welding Board Angle: M-Male
④ Material: B-Brass
P-Phosphor Bronze
⑤ Plating Category: SN-Bright Tin Plating

X9556TM-PSN	Phosphor Bronze	AWG#22~26	X9556H
X9556TM-BSN	Brass	AWG#22~26	X9556H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X9556TM-PSN
APPROVED		SIZE: A4	DWG NO.: X-X9556TM-PSN