







FRONT VIEW

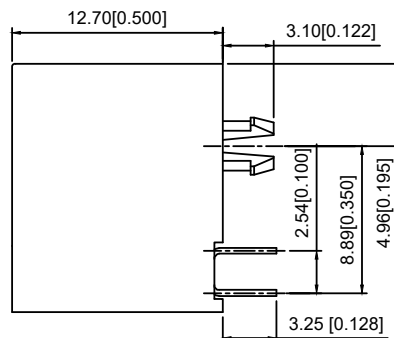

RIGHT SIDE VIEW

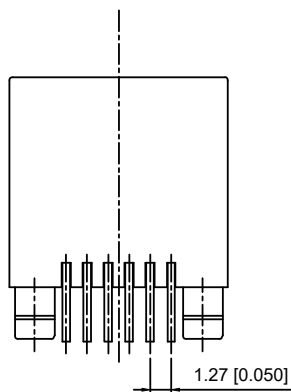

BOTTOM VIEW

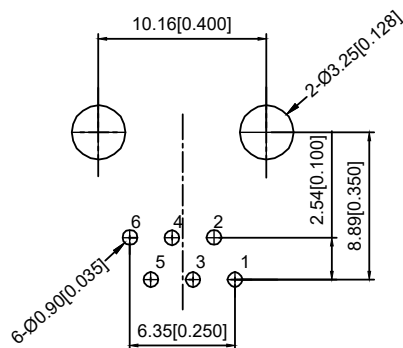RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: PBT,UL94V-0,BLACK.

TERMINALS BRACKET 端子支架: PBT,UL94V-0,RED.

TERMINAL 端子: PHOSPHOR BRONZE T=0.3MM

GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE 插入力:2.2KG.F MAX

RETENTION STRENGTH 保持力:7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL 电气:

VOLTAGE 电压: 125 VOLTS AC.

CURRENT RATING 电流额定值: 1.5AMP.

DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN

INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

								DSND			SCALE: N/A		MODEL TYPE: RJ JACK			
ΔX								DWN			VIEW: 		PART NO.: X02AHIWA1DB4008			
ΔX								CHKD			UNIT: mm/in		DWG NO.: X02AHIWA1DB4008			
ΔX								APPD			SIZE: A4					
MARK																
DESCRIPTION						DATE		REVISED		APPROVED		UNSPECIFIED TOLERANCES				
REVISIONS																
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn														XKB INDUSTRIAL PRECISION CO.,LIMITED		
														WEIGHT		
														SHEET		
														REVISION		
														1/1		
														A0		