

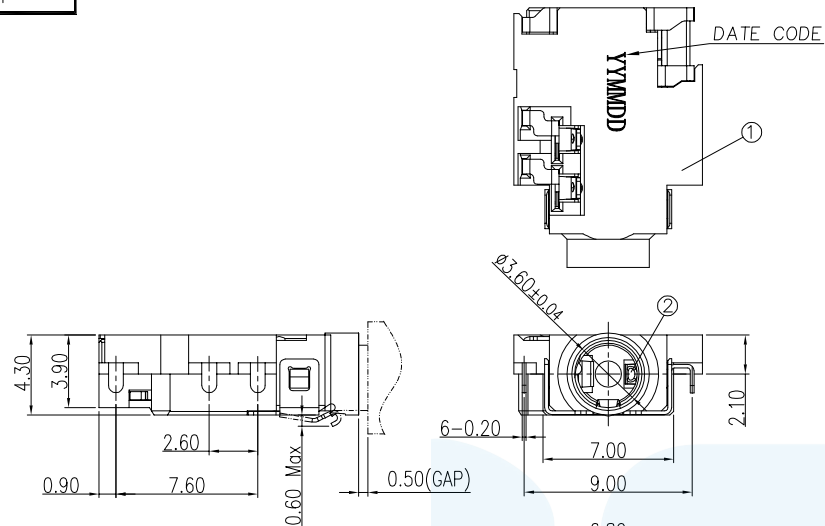



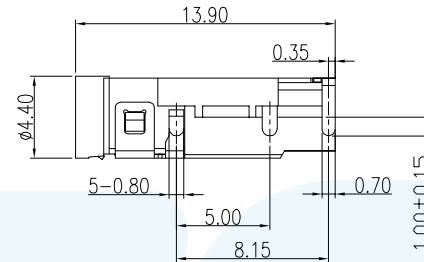


DATE CODE:

YY MM DD
DAY
MONTH
YEAR

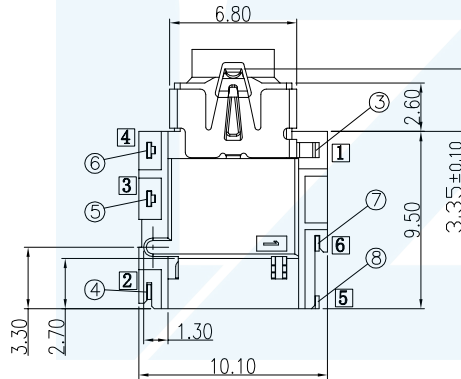


3D VIEW

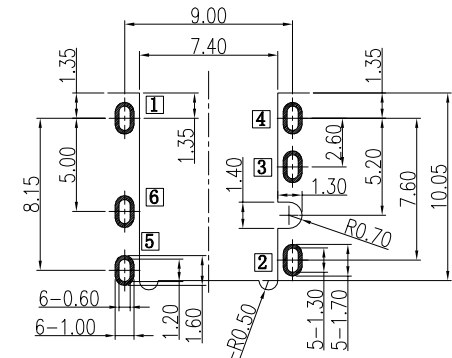RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)


NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1.0 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 0.5~2.2Kgf.(Initial); 0.4~2.2Kgf.(After Life test);
 - 4.2. UNMATING FORCE: 0.5~2.0Kgf.(Initial); 0.4~2.0Kgf.(After Life test);
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. SALT SPRAY: 48H.
 - 5.2. OPERATION: -30°C~+80°C.

PLUG SPEC



SCHEMATIC



AFTER INSERT SCHEMATIC




TABLE 1:

⑧	Contact_5	⑤	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑦	Contact_6	⑥	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑥	Contact_4	④	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑤	Contact_3	③	1	Phosphor bronze	Au 1u"Min	T=0.20mm
④	Contact_2	②	1	Phosphor bronze	Au 1u"Min	T=0.20mm
③	Contact_1	①	1	Phosphor bronze	Au 1u"Min	T=0.20mm
②	Separator		1	HIGH TEMP. PLASTIC	Black	
①	Housing		1	PA10T	Black	


NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
-----	-----------	-----	----------	-------------	--------



LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2023.11.24	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.11.24	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.11.24	DWG. NO.	
DRAWING NO.	ZB23028-06FBAP-A			SHEET	1/2

PART NAME	3.50mm AUDIO JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:	mm
PART NO.	ZB23028-06FBAP-A	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°		
			0.000±0.05	0.00°±0.5°		

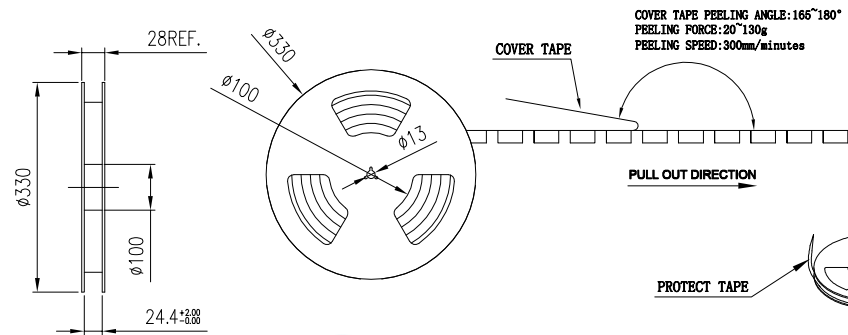


COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g
PEELING SPEED:300mm/minutes

COVER TAPE

PULL OUT DIRECTION

PROTECT TAPE

10 DISK

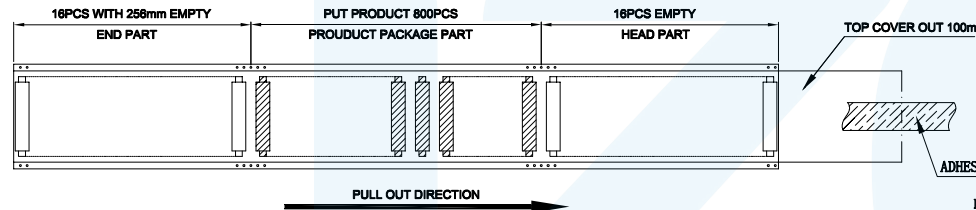


NOTES:

1. Material requirements:

1.1 The carton material requirements for the B-B,
Dimension is 350*340*310mm;
1.2 Reel materials for FS; size reel for 330*28.

2. Packaging requirements:

2.1 The tape into the packing machine, before the empty 16PCS,
after the release of the product 800PCS,
then the empty 16PCS with 256mm length of stay;
2.2 Top cover should out 100mm of the carrier tape. After winding,
using adhesive tape (80~150mm) to stick the leader of cover
tap on the side of the carrier tape;
2.3 Winding a protect tape around the reel, then stick it
by adhesive tape;
2.4 Label should paste in the designated area of the reel;
2.5 Put a dryer and a packed reel in the vacuum bag and
make the vacuum process;
2.6 The tired folded 10 disks in the carton total 8000pcs;
2.7 Packed finished packing sealing, and in the outer carton label

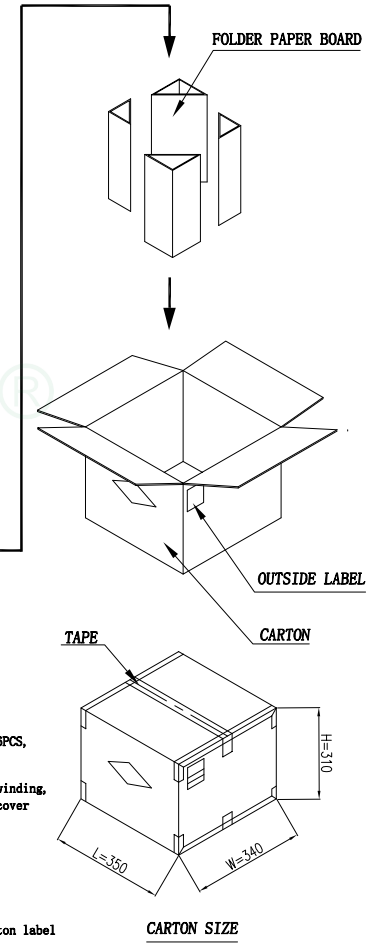

LZG INDUSTRIAL CO. LTD

PART NAME	ø3.50mm AUDIO JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:
PART NO.	ZB23028-06FBAP-A	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°	
			0.000±0.05	0.00°±0.5°	

DRAWING:	林生财	DATE:	2023.11.24	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.11.24	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.11.24	DWG. NO.	
DRAWING NO.	ZB23028-06FBAP-A			SHEET	2/2