

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

Materials and Electroplating

- ①. Plastic body: PA66
②. Clip: Copper, nickel plated
③. Square box: Copper, nickel plated
④. Plastic cover plate: PA66
⑤. Screw: M2.0, iron, galvanized, straight groove

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

Using wire diameter: 28-16AWG 1.5mm²





mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C for 5 econds

Torque: 0.2Nm (1.77Lbin)

Stripping length: 6-7mm

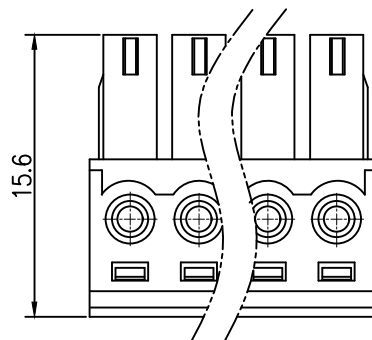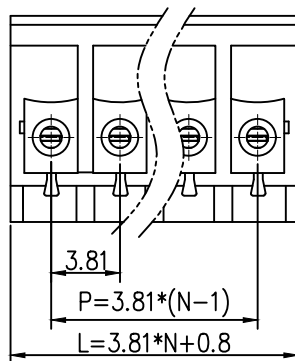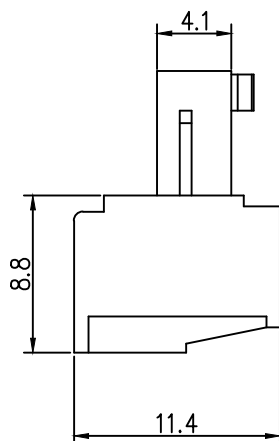

2	方盒	铜	镀镍	
1	底座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品 名	接线端子																		
			TITLE																			
			料 号	HC-JXDZK-3.81-10P																		
			PART NO																			
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列	1 : 1																			
		单 位	MM	制 图	AhYe																	
		UNIT		DRAW																		
<table border="1"><tr><th colspan="3">公差参数</th></tr><tr><th>Pin#</th><th>DinP</th><th>DinL</th></tr><tr><td>2-6P</td><td>±0.10</td><td>±0.20</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></table>		公差参数			Pin#	DinP	DinL	2-6P	±0.10	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	张 数	审 核	夏操云
公差参数																						
Pin#	DinP	DinL																				
2-6P	±0.10	±0.20																				
7-12P	±0.20	±0.30																				
13-18P	±0.25	±0.40																				
19-24P	±0.30	±0.50																				
X.X ±0.35		PART NO	1 OF 1	CHECKED																		
X.XX ±0.25		版 本	A	批 准	赵亮亮																	
X.XXX ±0.15		REV	APPROVE																			
																						