


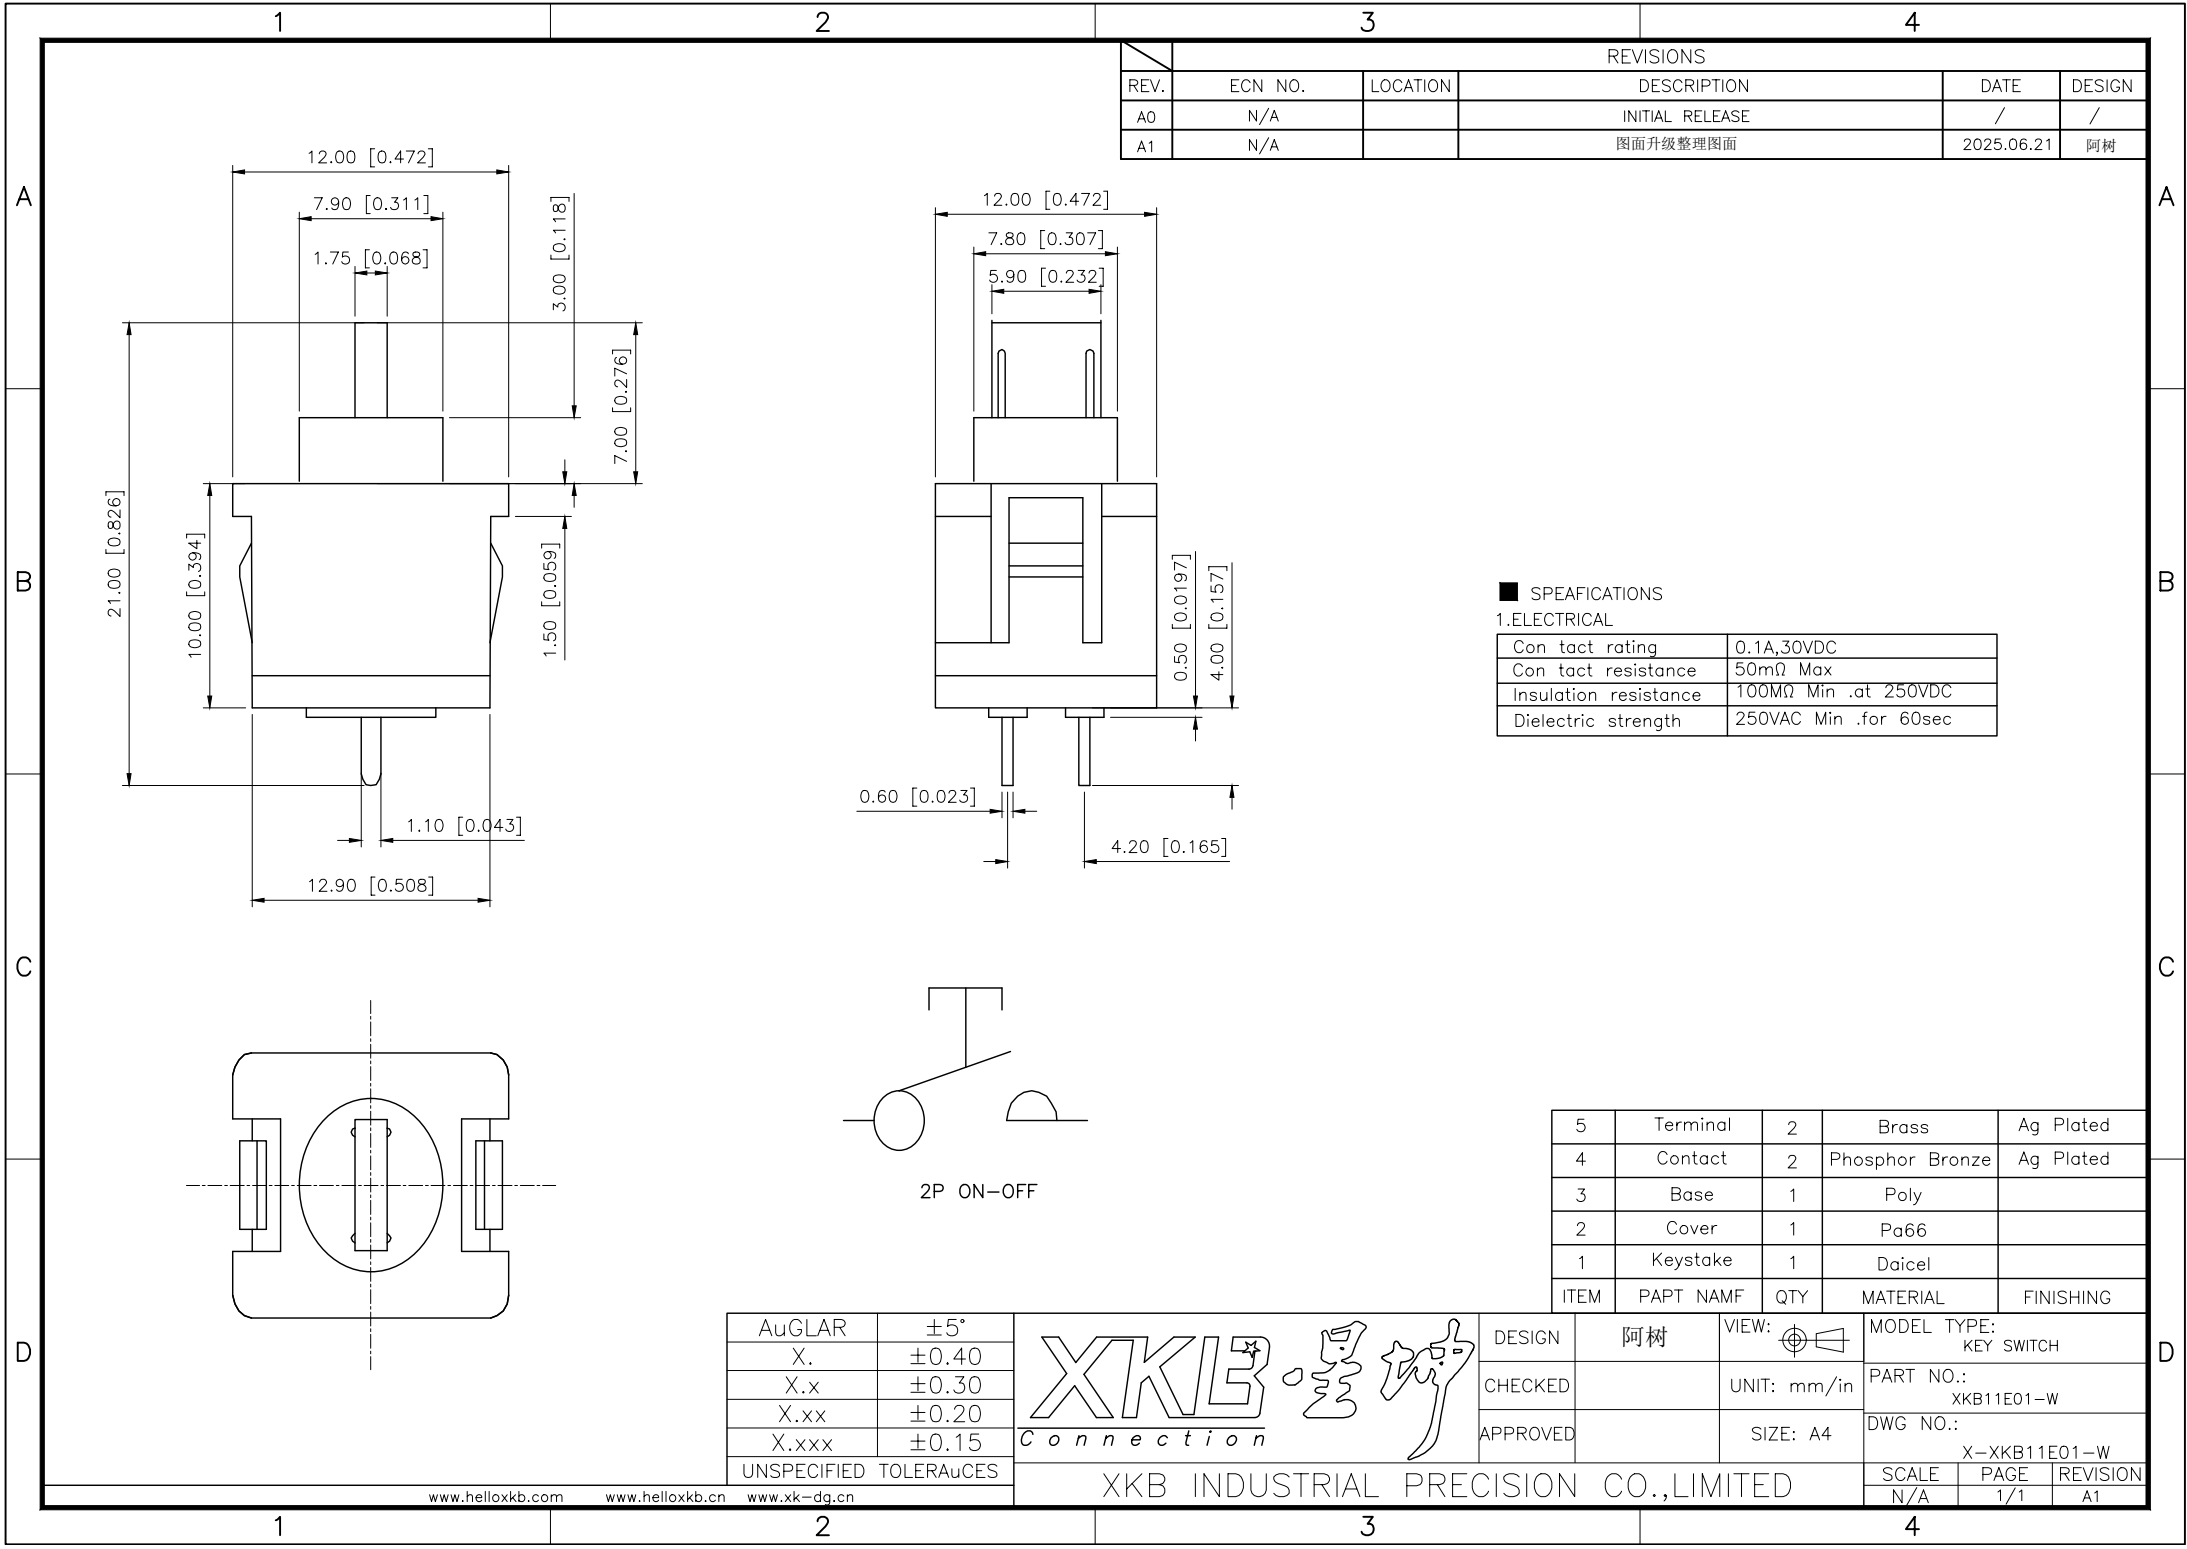

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

■ SPEAFICATIONS

1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec


5	Terminal	2	Brass	Ag Plated
4	Contact	2	Phosphor Bronze	Ag Plated
3	Base	1	Poly	
2	Cover	1	Pa66	
1	Keystake	1	Daicel	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	



DESIGN
CHECKED
APPROVED

阿树
UNIT: mm/in
SIZE: A4



MODEL TYPE:
KEY SWITCH
PART NO.:
XKB11E01-W
DWG NO.:
X-XKB11E01-W