

Pitch:2.00x2.00mm(0.079 " x0.079 ")
Shrouded Header Straight Elevator Dip Type

ELETE
—Professional Connecting Solution—
BXLD SH01 Series

Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials





Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

Mating with



IDC connector
IDCLF

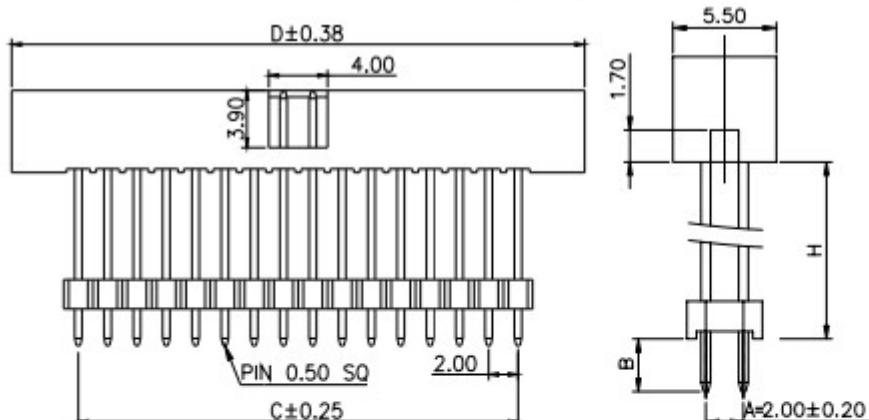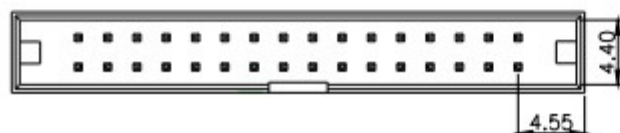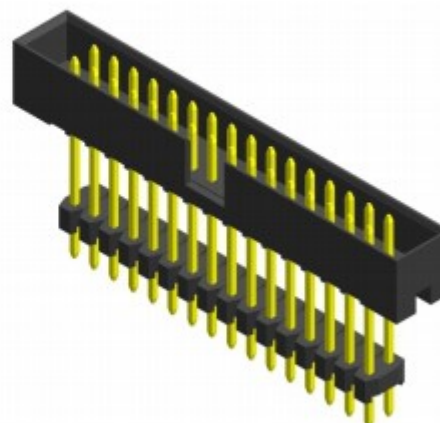

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
04	14.00	15.10	10	18.00	27.10	16	30.00	37.10	22	42.00	51.10
05	8.00	17.10	11	20.00	29.10	17	32.00	39.10	23	44.00	53.10
06	10.00	19.10	12	22.00	31.10	18	34.00	41.10	24	46.00	55.10
07	12.00	21.10	13	24.00	33.10	19	36.00	43.10	25	48.00	57.10
08	14.00	23.10	14	26.00	35.10	20	38.00	45.10			
09	16.00	25.10	15	28.00	37.10	21	40.00	47.10			