

Pitch:2.54x2.54mm(0.1 " x0.1 ")
Female Header Dual Rows S.M.T Type

ELETE
—Professional Connecting Solution—
HFNDM35 Series



Specifications

Current Rating:3.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:600V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

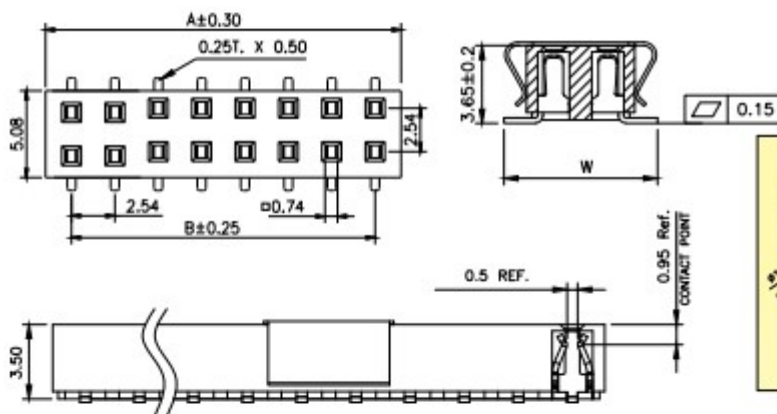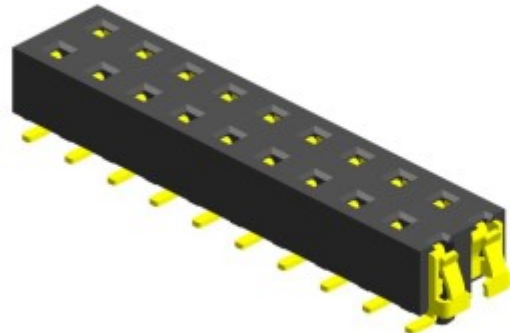


Mating with




HMNDSH25



HMNDS25




HMNDS43



HMNDS74




HMNDM43



HMNDM25



HMNDP61/HMNDP50



HMNDR43



HMNDR25

PS:Suggested Mating Pin Length:2.5~3.0mm

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	5.58	2.54	-	12	30.98	27.94	25.40	22	56.38	53.34	50.80	32	81.78	78.74	76.20
03	8.12	5.08	2.54	13	33.52	30.48	27.94	23	58.92	55.88	53.34	33	84.32	81.28	78.74
04	10.66	7.62	5.08	14	36.06	33.02	30.48	24	61.46	58.42	55.88	34	86.86	83.82	81.28
05	13.20	10.16	7.62	15	38.60	35.56	33.02	25	64.00	60.96	58.42	35	89.40	86.36	83.82
06	15.74	12.70	10.16	16	41.14	38.10	35.56	26	66.54	63.50	60.96	36	91.94	88.90	86.36
07	18.28	15.24	12.70	17	43.68	40.64	38.10	27	69.08	66.04	63.50	37	94.48	91.44	88.90
08	20.82	17.78	15.24	18	46.22	43.18	40.64	28	71.62	68.58	66.04	38	97.02	93.98	91.44
09	23.36	20.32	17.78	19	48.76	45.72	43.18	29	74.16	71.12	68.58	39	99.56	96.52	93.98
10	25.90	22.86	20.32	20	51.30	48.26	45.72	30	76.70	73.66	71.12	40	#####	99.06	96.52
11	28.44	25.40	22.86	21	53.84	50.80	48.26	31	79.24	76.20	73.66				