




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		尺寸变更	2024.8.20	阿树
A2	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.7	阿树

A

B

C

D

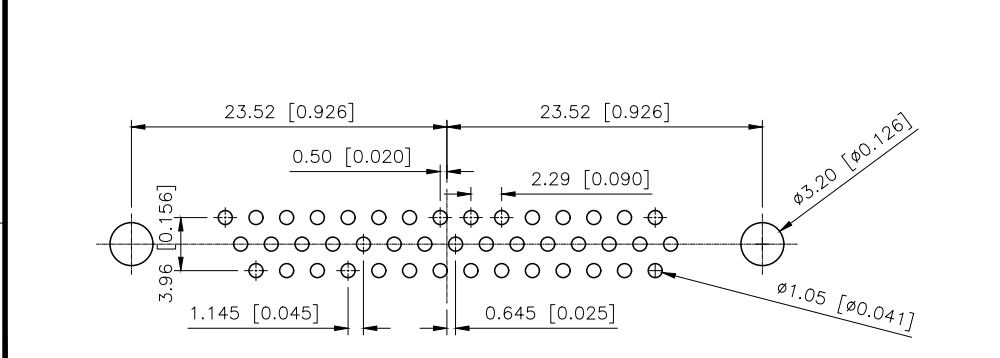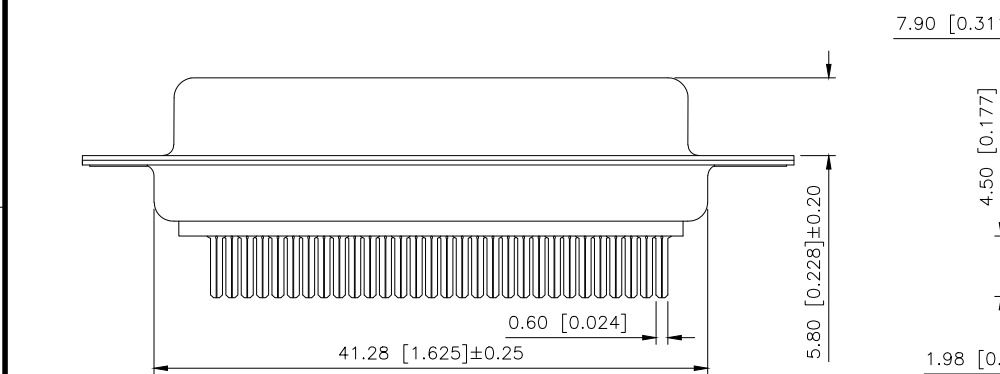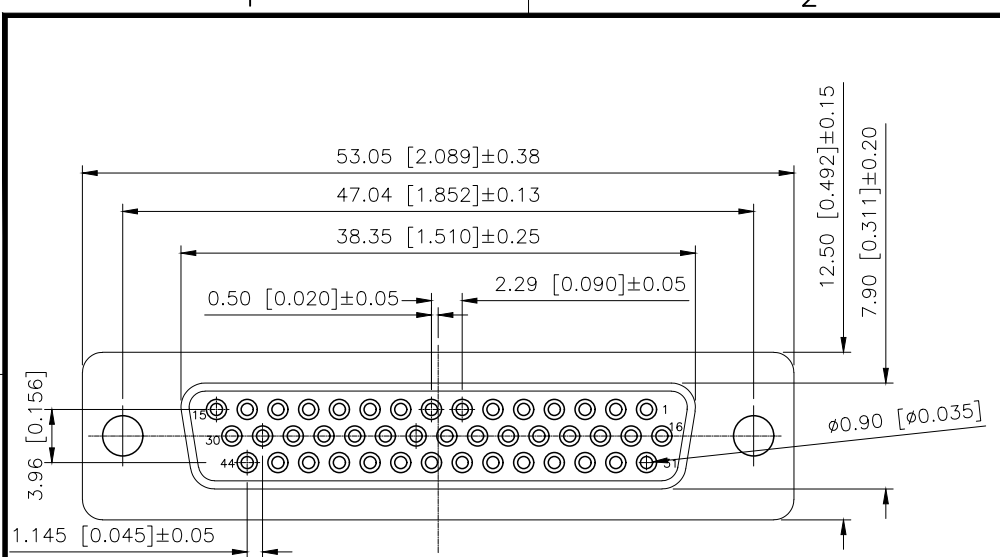

PCB LAYOUT

PART NO.:


X05 44 F C 2 W 5
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:44PIN
- ③Welding Board Angle :F-Female
- ④T: Tradutlional C: Car-pin
- ⑤Planting Catogtry:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥Color:B-BLACK W-White BL-Blue
- ⑦1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- 2.Current rating:3A(T) / 5A(C) AC/DC
额定电流: 3A(冲针) / 5A(车针) AC/DC
- 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
- 4.Temperature range: -55℃-+105℃
温度范围: -55℃-+105℃
- 5.Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
- 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
- 8.Terminal:Copper alloys
端子: 铜合金。
- 9.The iron shell:SPCC Nivkel Plating/
Tin Plating/Gold Plating
铁壳: SPCC,镀镍/镀锡/镀金
- B、成品不能有弯针, R角不一致等不良。

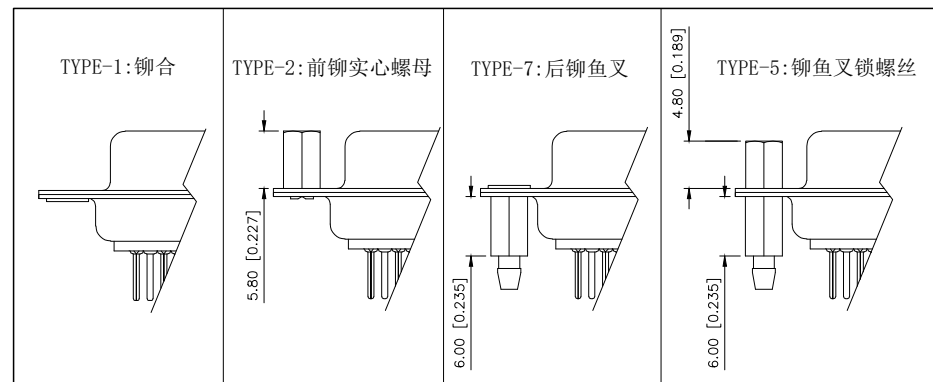

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X0544FC2W5
APPROVED		SIZE:	A4	DWG NO.:	X-X0544FC2W5