


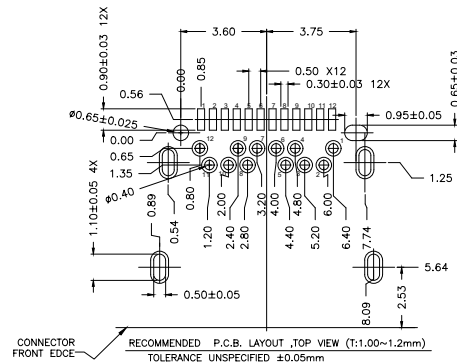

2.8工作温度: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$

A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1P1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRX1P2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

U262-241N-4BV60

1:AU 1U"

2:AU 3U"

5:AU 15U"

6:AU 30U"

							DSND		DATE		SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
△X					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.: U262-241N-4BV60		
△X					$L \leq 4$	±0.2	CHKD		DATE		UNIT: mm/in	DWG NO.: X-U262-241N-4BV60		
△X					$4 < L \leq 16$	±0.3	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
					UNSPECIFIED TOLERANCES									
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn							XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0