

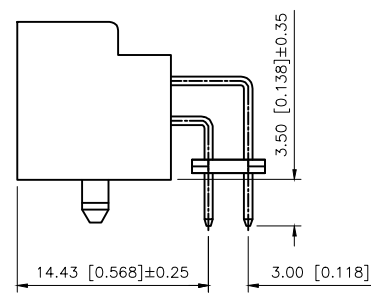
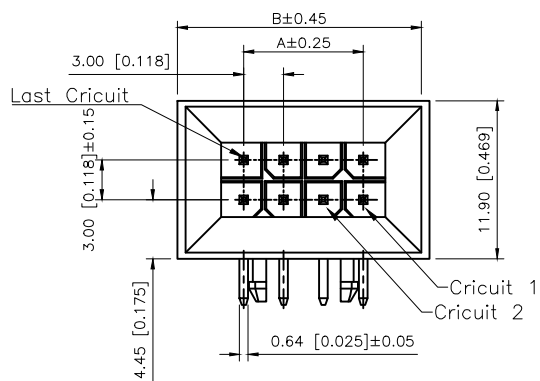
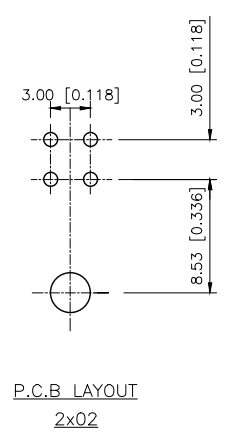
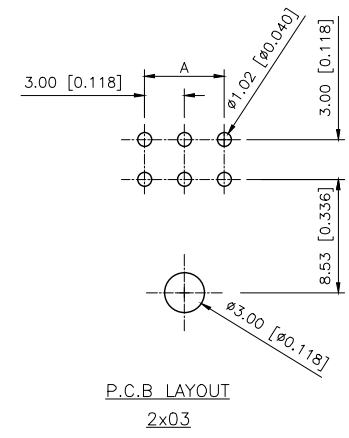


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2026.03.02	
/	/		/	/	/

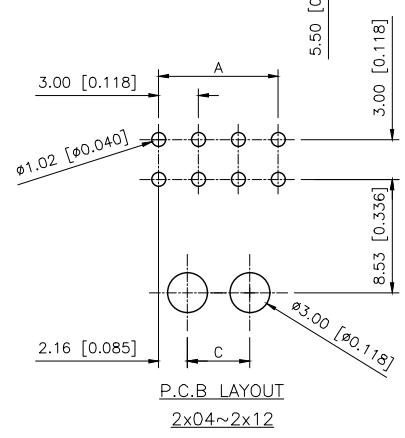


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:5A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing ≤20mΩ

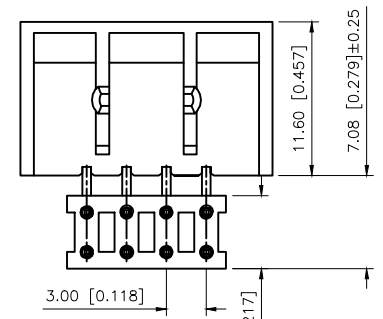

PART NO.:
X3025 W R-2x12 E-9T SN

Series No
Category:W-Wafer
Welding Board Angle:R-Stright 90°
Row No-Pin No 2xXX-2x02P~2x12P
Special NO:E-Horn mouth with positioning pin
Material: 9T-PA9T UL94V-0 Black
Planting:SN-Bright tin 100u"Min;Ni 50"Min

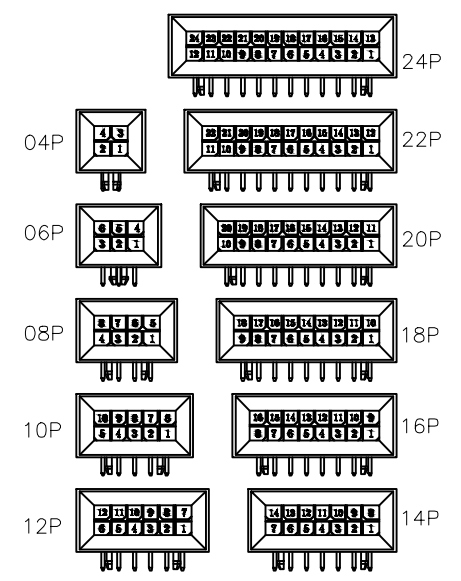

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)		
	A	B	C
2x02	3.00	13.00	
2x03	6.00	16.00	
2x04	9.00	19.00	4.68
2x05	12.00	22.00	7.68
2x06	15.00	25.00	10.68
2x07	18.00	28.00	13.68
2x08	21.00	31.00	16.68
2x09	24.00	34.00	19.68
2x10	27.00	37.00	22.68
2x11	30.00	40.00	25.68
2x12	33.00	43.00	28.68

X3025WR-2x12E-PTSN	PA9T UL 94V-0	Brass	Tin Plating Fog	X3025H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	VIEW:	MODEL TYPE: 3.00 mm Crimp Style Connectors
CHECKED	UNIT: mm/in	PART NO.: X3025WR-2x12E-9TSN
APPROVED	SIZE: A4	DWG NO.: