
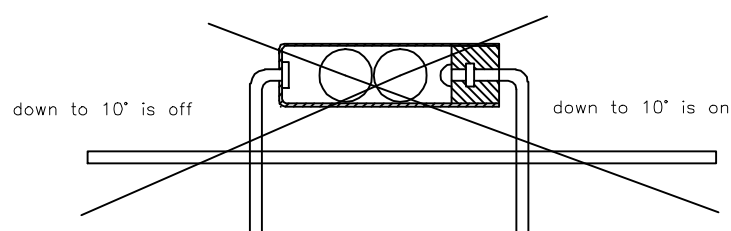


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.06.24	

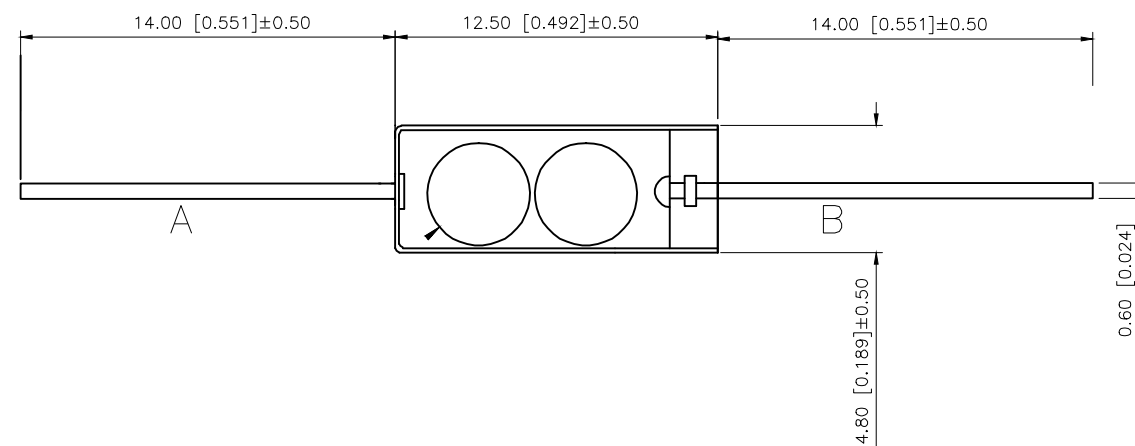

Voltage: < 12V
Current: < 20mA
Conduction time: 2ms
Closed circuit resistance: < 10m ohm
Open circuit resistance: > 10m ohm
High temperature resistance: 120 degrees
Terminal tension: 500gf / min
Humidity: 25~95%RH
Operating life: 100,000 times

Product features

- 1.SW-460D is double ball type single direction tilt induction trigger switch.
- 1.SW-460D
2. When the electric end of the product guide (foot less) is tilted and the tilt Angle is greater than 10 degrees, the product is in the open, (OFF) state. When the horizontal state of the product is tilted and the trigger end (gold-plated pin end) is lower than the horizontal and the tilt Angle is greater than 10 degrees, the product is in the closed, (ON) state.
- 2.
- 10
3. When placed horizontally, shaking can be easily triggered, and when there is no foot down, shaking is not easy to trigger.
- 3.
4. The products of this specification are completely sealed, waterproof and dustproof.
- 4.
5. Under normal circumstances, the switching life can reach 100,000 times.
- 5.
- 10
6. This product is made of environment-friendly metal material with stable performance.
- 6

	Heat shrinkable tube	1	Pet heat shrinkable tube	
	Rubber stopper	1	PLC	
	BALL	1	Brass	Nickel
	BALL	1	Brass	Silver
	PIN B	1	Brass	Gold
	PIN A	1	Brass	Tin
	Copper pipe	1	Brass	Nickel
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN		VIEW:	MODEL TYPE: Ball switch
CHECKED		UNIT: mm/in	PART NO.: SW-460D-14T14G
APPROVED		SIZE: A4	DWG NO.: