

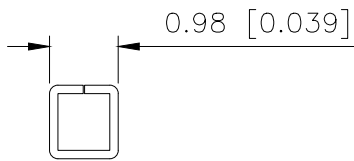
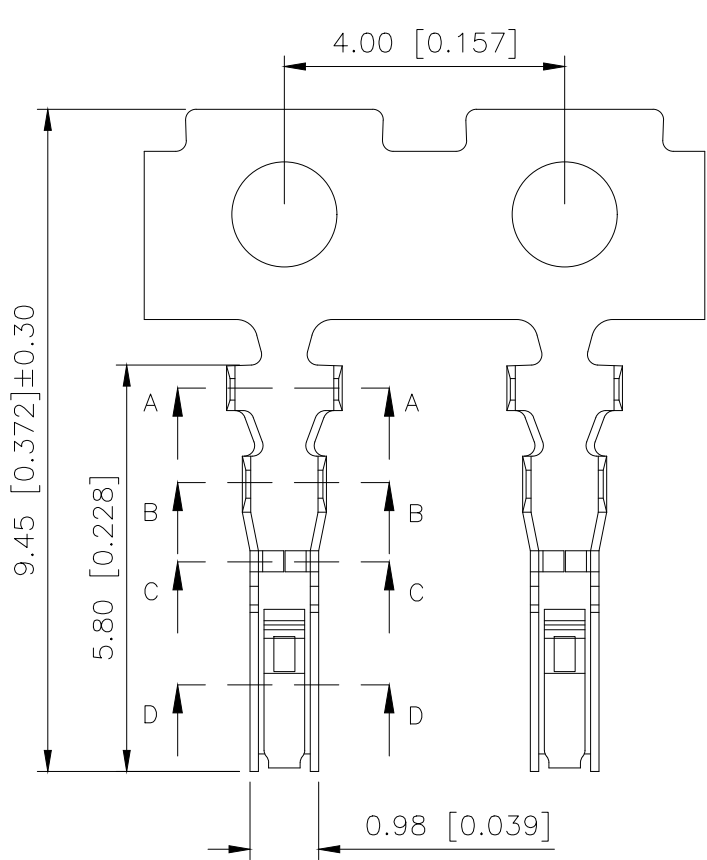



REVISONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.19	阿树




SECTION:C-C
SCALE:1:1

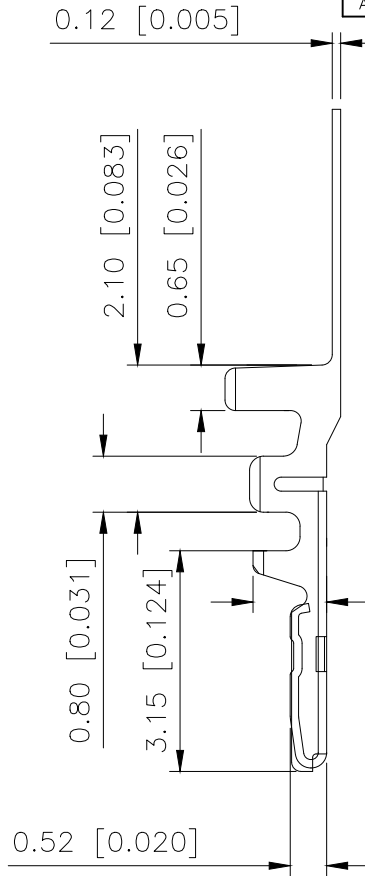

SECTION:D-D
SCALE:1:1



SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1

Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range: -40℃ - +125℃

温度范围: -40℃ - +125℃

Insulation resistance:100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:50mΩ Max

接触电阻: 50mΩ Max

PART NO.:

X1254 I-P V01 A
① ② ③ ④ ⑤

①Series Number.

②Category: T-terminal

③Material:P-Phosphor bronze

④Plating:XX:V01-Gold Plated

SN-Tin Plating

⑤Type: A Type

X1254T-PV01-A	Phosph	AWG#32~26	X1254H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEWS	①	MODEL TYPE: 1.25mm Crimp Style Connector
CHECKED		UNIT: mm/in		PART NO.: X1254T-PV01-A
APPROVED		SIZE: A4		DWG NO.: X-X1254T-PV01-A

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1