

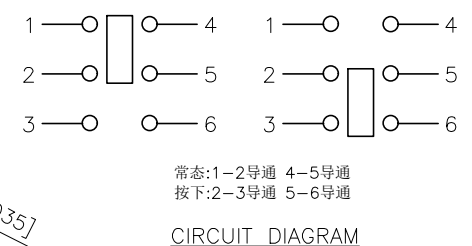
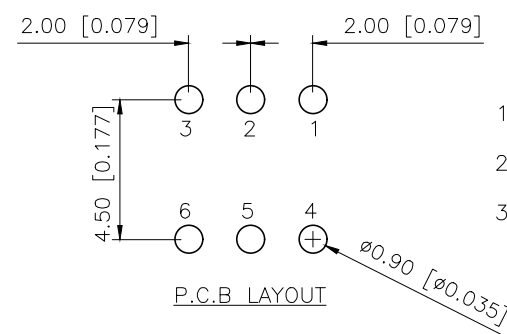


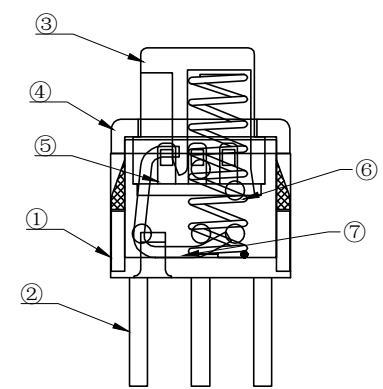


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.23	阿树
A2	N/A		产品尺寸, 外观, 电气性能及材质变更	2025.10.10	阿树

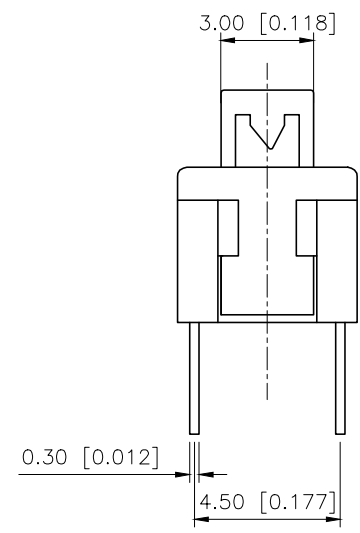

常态:1-2导通 4-5导通
按下:2-3导通 5-6导通

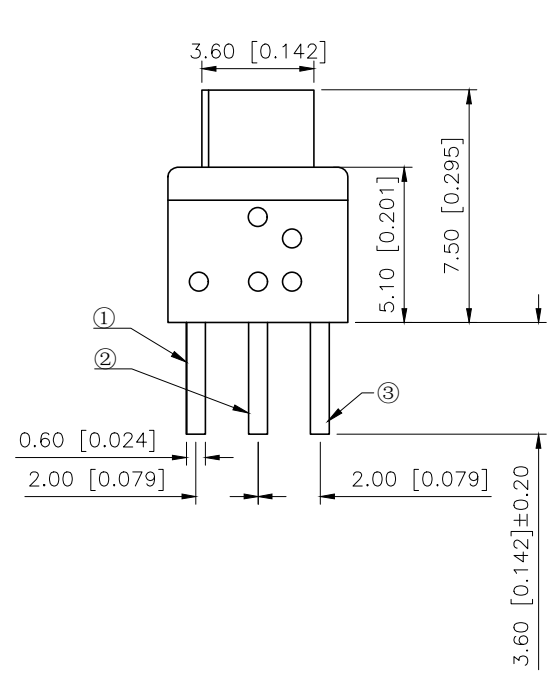

- Specifications (规格):
- 1.Voltage rating (额定电压): DC 30V
 - 2.Current rating (额定电流): 100mA AC/DC
 - 3.Withstanding voltage (耐压值): $\geq 500V$ AC/minute
 - 4.Insulation resistance (绝缘电阻): $\geq 100M\Omega$ Min
 - 5.Contact resistance (接触电阻): $\leq 200m\Omega$ Max
 - 6.Mating cycles (使用寿命): 10000 cycles Min
 - 7.Travel (行程): $2.0 \pm 0.20mm$
 - 8.Operating force (按力): $250 \pm 50gf$
 - 9.Temperature range (使用温度): $-40^{\circ}C \sim +85^{\circ}C$

PAPT NO	XKB5858-Z-75
OPERATION	W:NO LOCK Z:LOCK

7	Hook	2	Sus		Natural
6	Spring	6	Sus		Natural
5	Reeds	1	Composite Silver		Natural
4	Cover	1	PPA		Black
3	By handle	1	PPA		Beige
2	Terminal	1	Brass	Plating silvering	Natural
1	Pedestal	1	PPA		Gray
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING	COLOR

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH	
CHECKED		UNIT:	mm/in	PART NO.:	XKB5858-Z-75	
APPROVED		SIZE:	A4	DWG NO.:	X-KXB5858-Z-75	
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A2