


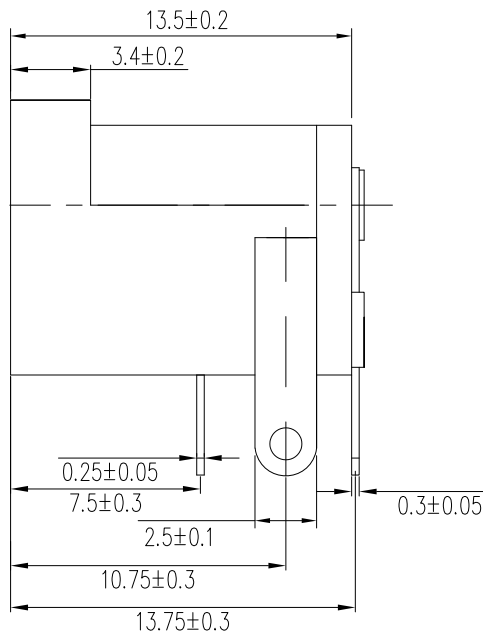
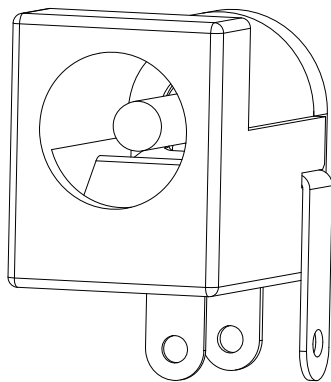


RoHS

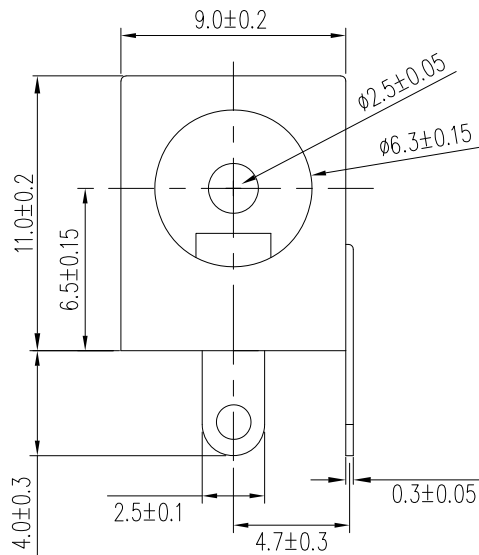

TECHNICAL FEATURES

- 1.OPERATING TEMPERATURE: -25 TO 70°C
- 2.RATED ELECTRONEGATIVITY: DC 30V 1.0A
- 3.CONTACT RESISTANCE: ≤30 mΩ
- 4.INSULATION RESISTANCE: ≥100MΩ
- 5.WITHSTAND VOLTAGE: AC500V (50HZ) /Min
- 6.INSERTION AND EXTRACTION FORCE: 3-25N
- 7.LIFESPAN: 5,000 TIMES

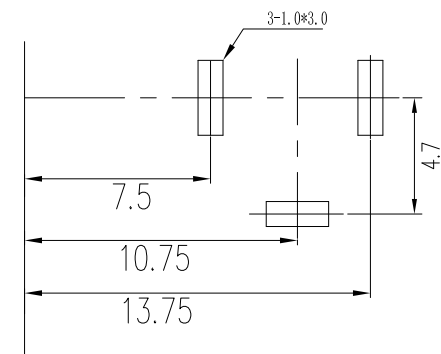

PCB HOLES(TOP VIEW)

GENERAL TOLERANCE: ±0.05mm

6	REAR COVER	1PCS	PBT/PPA/PA46	BLACK
5	BASE SEAT	1PCS	PBT/PPA/PA46	BLACK
4	INSERT A NEEDLE	1PCS	BRASS	Ni PLATING
3	BULLET PIECE	1PCS	PHOSPHOR COPPER	Sn PLATING
2	CURVED SHEET	1PCS	BRASS	Sn PLATING
1	FLAT PLATE	1PCS	BRASS	Sn PLATING
NO	NAME	Q'TY	MATERIALS	REMARKS

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD					
BASIC DIMENSION	TOLERANCE	DSND	W Z Z	25.12.13	TITLE:DC SOCKET		
x.x	±0.30	CHKD	L P J	25.12.13	PART NO:FG-DC-005-2.5T		
x.xx	±0.20	APVD	L Z W	25.12.13			
x.xxx	±0.10						
ANGLES	±3°			UNIT:mm	SCALE:1:1	SIZE:A4	SHEET:1/1