
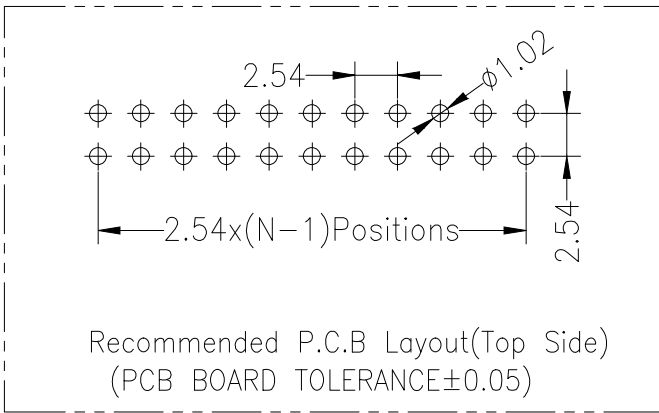
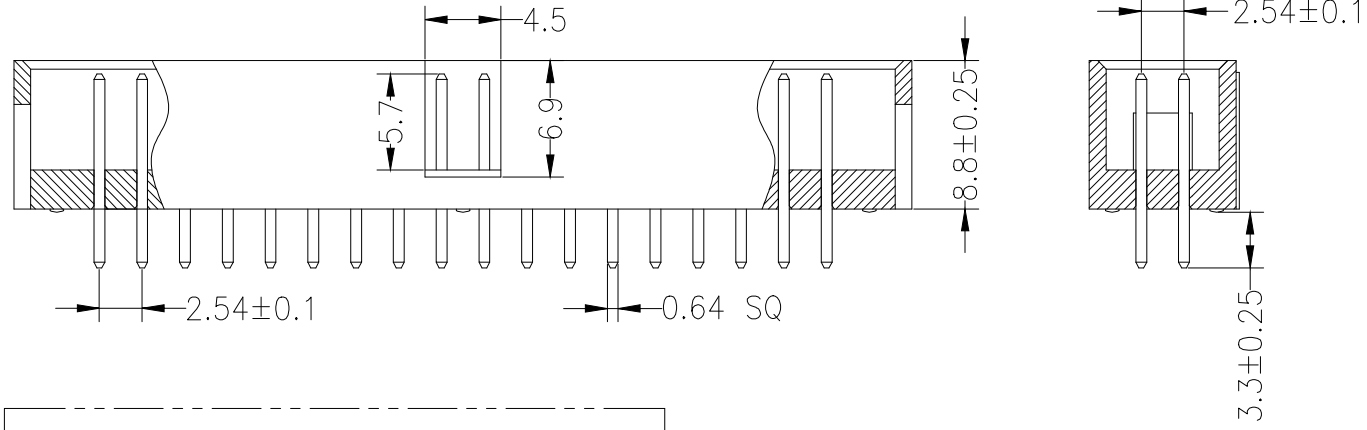


**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

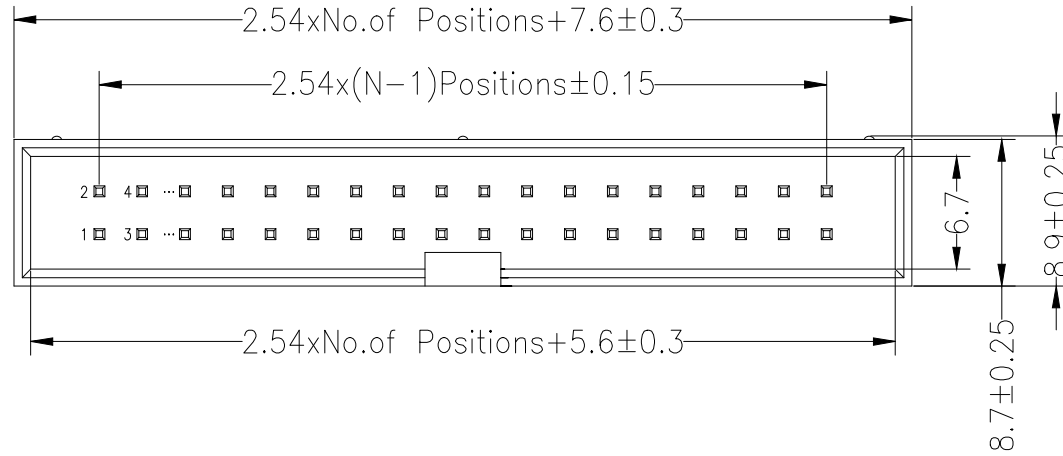

**Ordering Information**

HC-JN 254 - \* - N - \* - \* - \*\*

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 06-64Pin	Type 2=直针 3=弯针 4=空脚 5=带脚	Length (Plastic) (mm)	Material 默认=PBT C=PA6T E=PA9T F=LCP	Contact Plating G0:Gold Flash C1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	------------------------	--------------------------------------	--------------------------	---	--

		GENERAL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
		DIM	TOL	审核 CHECK				
		X.X	±0.30	批准 APPROVAL	产品名称 TITLE	筒牛2.54 双排 直针	版本 REV.	A
		X.XX	±0.20	比例 SCALE	产品料号 PART NO.	HC-JN254-2-N-Z-8.8-XX	单位 UNITS	mm
1	初版发行	X.XXX	±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°				