
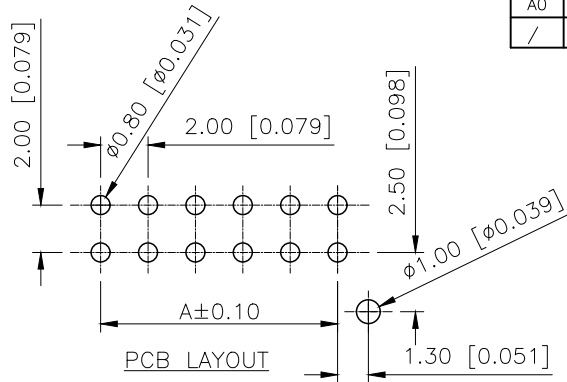



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.11.28	阿树
/	/		/	/	/

A

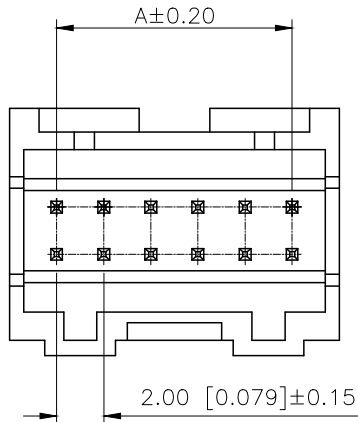

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压: 800V AC/分钟
Temperature range:−40℃−+125℃
温度范围: −40℃−+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:10mΩ Max
接触电阻: 10mΩ Max


B

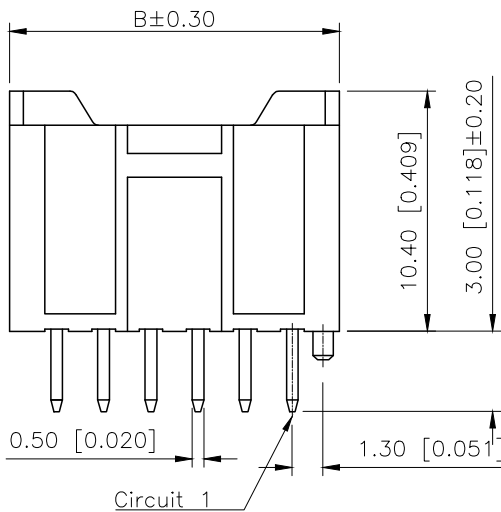

PART NO.:

X2015 W V-2xXX-46 V01
① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Row No-Pin No:2xXX-2x02~2x20Pin
- ⑤Material:46-Nylon46 UL94V-0
- ⑥Plating Category:V01-Gold 1U"

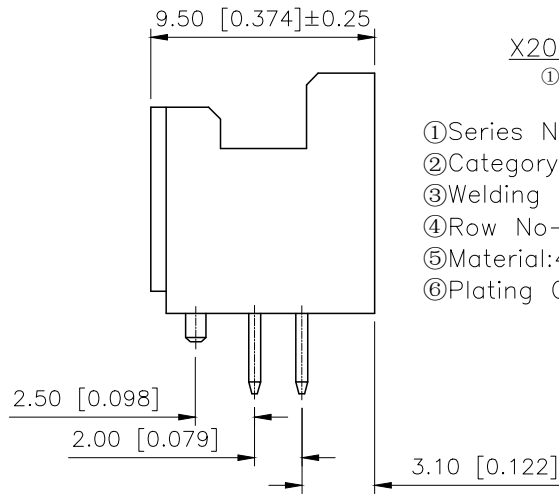

C

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x02	2.00	6.00	2x08	14.00	18.00
2x03	4.00	8.00	2x09	16.00	20.00
2x04	6.00	10.00	2x10	18.00	22.00
2x05	8.00	12.00	2x11	20.00	24.00
2x06	10.00	14.00	2x12	22.00	26.00
2x07	12.00	16.00	2x20	38.00	42.00
X2015WV-2xXX-46V01		Nylon46	Brass	X2015H	
PART NO		Material	Material(Pin)	Suitable XKB Housing	

D

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X2015WV-2xXX-46V01
APPROVED		SIZE:	A4	DWG NO.: